

PSCR-360

High-Precision Non-Contact Rotary Sensor




KEY FEATURES



True, contactless operation

Without any gears or mechanical interfaces the sensor is easily assembled and calibrated and subject to limited wear and tear over lifetime.




360 degree absolute position feedback

Endless mechanical rotational angle without dead band, keeps the position on power loss with programmable electrical angles from 15 to 360 degrees.




Made for harsh environments

The rugged IP65 package protects the sensor from dust, moisture, vibration and extreme temperatures for usage in the most demanding environments.



Durable and robust design

The non-contacting design allows for an extra-long product lifetime of million of cycles.



Integrated shaft

The magnet is securely fastened to the shaft and acts as only moving component in the sensor.

DESCRIPTION

The PSCR-360 rotary angle sensor delivers reliable, high-accuracy position feedback in a compact, roughly 28-millimeter diameter housing. Its contactless measurement principle ensures minimal wear and long operational life, even under demanding conditions. With high linearity ($\pm 0.3\%$) and a 12-bit resolution, the sensor provides precise and stable output signals tailored to your application's requirements. The integrated flange simplifies installation and alignment, making it easy to retrofit into existing systems. Full redundancy options enhance safety-critical operations, while its cost-effective design helps maintain project budgets. The PSCR-360 is a versatile solution that combines durability, accuracy, and affordability.

The sensor also features robust construction that resists shock, vibration, and wide temperature ranges, which is why it's commonly used in industrial automation, off-highway vehicles, medical equipment, and other demanding applications.

APPLICATIONS EXAMPLES

Industrial

- Robotics and automation feedback
- Valve and actuator position monitoring
- Conveyor operation

Transportation & Agriculture & Construction

- Throttle and brake pedal position
- Suspension and chassis height detection
- Fork height and mast tilt
- Hitch position
- Crane jib and boom angle
- Position sensing for boom arms, loaders, and other articulated mechanisms
- Angle detection in control levers for tractors, harvesters, and construction equipment
- Steering angle measurement in passenger cars and commercial vehicles

Renewable Energy

- Wind turbines blade pitch and yaw

PSCR-360

High-Precision Non-Contact Rotary Sensor

MECHANICAL SPECIFICATIONS	
Rotational life	Up to 50.000.000 cycles
Mechanical range	360° (endless rotation)
Shaft diameter	6mm
Max. mounting torque	2.5Nm
Bearing type	Plain

ELECTRICAL SPECIFICATIONS	
Linearity*	±0.3% independent
Electrical angular range	Configurable from 15° to 360°
Output Ratiometric (when 5V supply) RE	10% to 90% of Supply Voltage 0.5 to 4.5 VDC
Angular resolution	12 bit
Supply voltage	4.5 to 5.5 V / 8 to 35 V (RE)
Supply current Ratiometric RE	8mA 10mA
Over / Reverse voltage protection Ratiometric RE	+15/-10V +30V/-30V
Self-diagnostic features	Yes

* Ferromagnetic materials and external magnetic fields close to the sensor (i.e. shaft, mounting surface) may affect the sensor's linearity.


ENVIRONMENTAL SPECIFICATIONS	
Operating and storage temperature ¹	-40° to +80°C
Sealing	IP65

¹ Other specifications on request

PSCR-360

High-Precision Non-Contact Rotary Sensor

DIMENSIONS [MM]

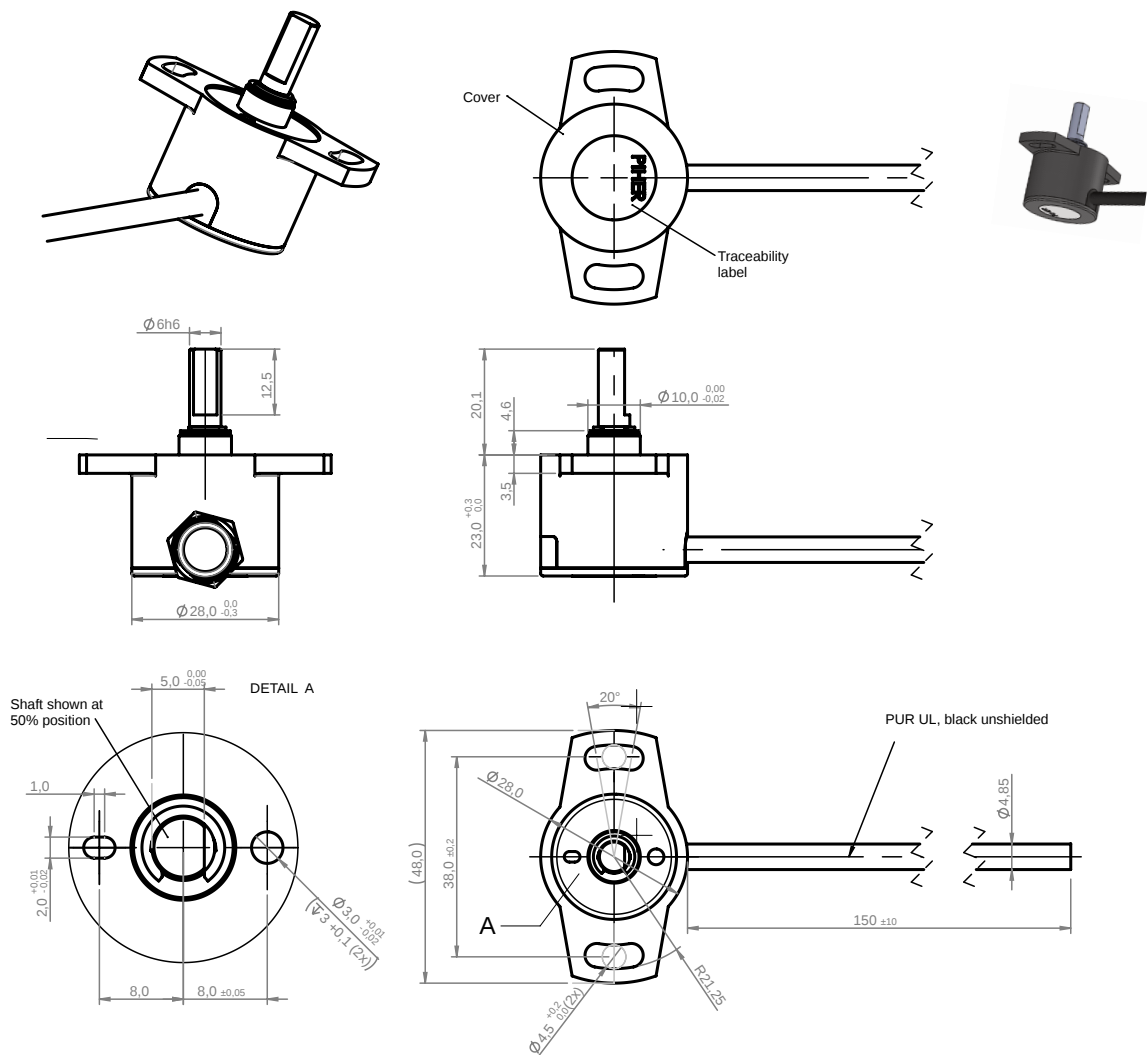

WIRING

Output function	3-wire cable [AWG22] Length 1m	4-wire cable [AWG22] Length 1m	6-wire cable [AWG22] Length 1m
Simple S / I	✓		
Redundant		✓	
Full Redundant			✓

CONNECTION SCHEME

Color	Simple output	Redundant output	Full-redundant output
Brown	Power supply	Power supply	Power supply 1
Blue	Ground	Ground	Ground 1
Black	Signal output	Signal output 1	Ground 2
White	n/a	Signal output 2	Signal output 2
Red	n/a	n/a	Power supply 2
Yellow	n/a	n/a	Signal output 1
Grey	n/a	n/a	n/a


Connector assembly is available upon request. The sensor will be delivered with the appropriate number of wires based on the selected output type. Drawings may not be to scale.

PSCR-360

High-Precision Non-Contact Rotary Sensor

HOW TO ORDER (Example: PSCR360-F-A-120S-05)

PSCR360	-	-	-	-	-	-
Series	Actuator ¹	Output protocol ²	Electric rotational angle ³	Output function ⁴	Voltage supply	
	F = flat H = spring fit	A = analogic	030 050 070 090 120 180 270 360	S = standard (CW) I = inverted (CCW) R = redundant F = full redundant	05 = 5 VDC ±10% RE = 8 to 35 V	



2 The analog output is ratiometric, proportional:


- for supply voltage "5V" to input voltage;
- for supply voltage "RE" to 5V.

"I" models must use "RE" voltage supply.

3 Models with ERA < 30° available on request.

4 Other output functions available (PWM, SPI, 4-20mA, 0-10V, CAN), please check availability.

OUTPUT VOLTAGE DEPENDING ON SHAFT POSITION

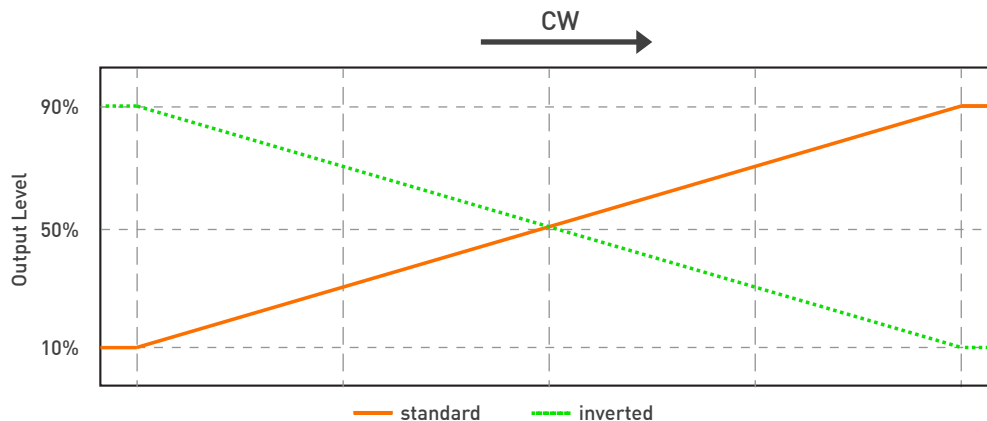

ERA	Mechanical Rotational Angle		
360 → -180°	0°		+180°
270 → -135°	0°		+135°
180 → -90°	0°		+90°
120 → -60°	0°		+60°
090 → -45°	0°		+45°
070 → -35°	0°		+35°
050 → -25°	0°		+25°
030 → -15°	0°		+15°

ERA = electrical rotation angle. The electrical rotation angle is the part of the rotation where the rotor's position affects the sensor's output.
Custom output functions available on request.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Motion & Position Sensors - Industrial](#) ***category:***

Click to view products by [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[F07018056](#) [F56101101](#) [PT8101-0050-111-4110](#) [WISE-2460-MA](#) [HRPSM50-F-A120-S-05](#) [HRPSM50-F-A180-S-05](#) [HRPSM50-F-A060-S-05](#)
[HRPSM50-F-A090-S-RE](#) [HRPSM50-F-A180-S-RE](#) [HRPSM50-F-A360-S-RE](#) [HRPSM50-F-A360-S-05](#) [HRPSM50-H-A360-S-05](#)
[HRPSM50-H-A090-S-05](#) [HRPSM50-H-A090-I-RE](#) [PS2P-ARC-CE-M008-A-45S-05](#) [PS2P-ARC-CE-M009-A-110S-05](#) [PS2P-ARC-CE-M009-A-45S-05](#) [PS2P-ARC-LA-M008-J-090S-RE](#) [PS2P-ARC-CE-M009-A-090S-05](#) [PS2P-ARC-LA-M008-A-045S-05](#) [PS2P-ARC-LA-M008-J-045S-RE](#) [PS2P-ARC-LA-M008-O-110S-RE](#) [PS2P-ARC-LA-M008-O-045S-RE](#) [PS2P-ARC-LA-M008-O-090S-RE](#) [PS2P-ARC-LA-M009-J-110S-RE](#) [PS2P-ARC-LA-M009-J-045S-RE](#) [PS2P-ARC-LA-M009-J-090S-RE](#) [PS2P-ARC-LA-M009-O-045S-RE](#) [PS2P-ARC-LA-M009-O-090S-RE](#) [PS2P-ARC-CE-M008-A-090S-05](#) [PS2P-ARC-LA-M008-A-110S-05](#) [PS2P-ARC-LA-M008-A-090S-05](#) [PS2P-ARC-LA-M008-J-110S-RE](#) [PS2P-ARC-LA-M009-A-110S-05](#) [PS2P-ARC-LA-M009-A-045S-05](#) [PS2P-ARC-LA-M009-A-090S-05](#) [PS2P-CON-CE-M001-1A0-C0011-ERA090-RE](#) [PS2P-CON-CE-M006-2AA-C0002-ERA360-05](#) [PS2P-CON-CE-M006-3AA-C0036-ERA180-05](#) [PS2P-CON-CE-M006-3AA-C0002-ERA360-05](#) [PS2P-CON-CE-M001-1A0-C0000-ERA360-RE](#) [PS2P-CON-CE-M001-2AA-C0002-ERA360-RE](#) [PS2P-CON-CE-M001-2AA-C0036-ERA180-RE](#) [PS2P-CON-CE-M001-1A0-C0007-ERA180-RE](#) [PS2P-CON-CE-M006-1A0-C0011-ERA090-05](#) [PS2P-CON-CE-M006-1A0-C0011-ERA090-RE](#) [PS2P-CON-CE-M006-1A0-C0007-ERA180-05](#) [PS2P-CON-CE-M006-1A0-C0007-ERA180-RE](#) [PS2P-CON-CE-M006-1A0-C0000-ERA360-05](#) [PS2P-CON-CE-M006-1A0-C0000-ERA360-RE](#)