


**RoHS
COMPLIANCE**


Features

- ◊ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ◊ Metal silicon junction, majority carrier conduction
- ◊ Low power loss, high efficiency
- ◊ High current capability, low forward voltage drop
- ◊ High surge capability
- ◊ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◊ Guardring for overvoltage protection
- ◊ High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case

Mechanical Data

- ◊ Cases: ITO-220AC molded plastic body
- ◊ Terminals: Pure tin plated, lead free. solderable per MIL-STD-750, Method 2026
- ◊ Polarity: As marked
- ◊ Mounting position: Any
- ◊ Mounting torque: 5 in. - lbs. max
- ◊ Weight: 0.08 ounce, 2.24 grams

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%


Type Number	Symbol	MBRF 1635	MBRF 1645	MBRF 1650	MBRF 1660	MBRF 1690	MBRF 16100	MBRF 16150	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	35	45	50	60	90	100	150	V
Maximum RMS Voltage	V _{RMS}	24	31	35	42	63	70	105	V
Maximum DC Blocking Voltage	V _{DC}	35	45	50	60	90	100	150	V
Maximum Average Forward Rectified Current at T _c =125°C	I _(AV)					16			A
Peak Repetitive Forward Current (Rated V _R , Square Wave, 20KHz) at T _c =125°C	I _{FRM}					32			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}					150			A
Peak Repetitive Reverse Surge Current (Note 1)	I _{RRM}		1.0			0.5			A
Maximum Instantaneous Forward Voltage at: (Note 2) I _F =16A, T _c =25°C I _F =16A, T _c =125°C	V _F	0.63 0.57		0.75 0.65		0.85 0.75		0.95 0.92	V
Maximum Instantaneous Reverse Current @ T _c =25 °C at Rated DC Blocking Voltage (Note 2) @ T _c =125 °C	I _R	0.5 15		0.5 10		0.3 7.5		0.1 5.0	mA mA
Voltage Rate of Change (Rated V _R)	dV/dt				10,000				V/uS
Typical Junction Capacitance	C _j				500				pF
Maximum Typical Thermal Resistance(Note 3)	R _{θJC}				3.0				°C/W
Operating Junction Temperature Range	T _J				-65 to +150				°C
Storage Temperature Range	T _{TSG}				-65 to +175				°C

- Notes:
1. 2.0us Pulse Width, f=1.0 KHz
 2. Pulse Test: 300us Pulse Width, 1% Duty Cycle
 3. Mounted on Heatsink Size of 2" x 3" x 0.25" Al-Plate.

MBRF1635 - MBRF16150

Isolated 16.0 AMPS. Schottky Barrier Rectifiers

ITO-220AC

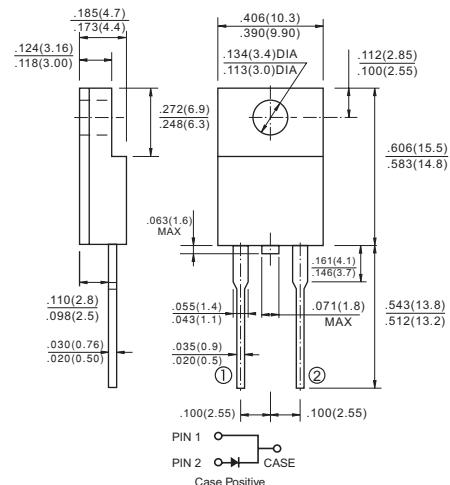

Dimensions in inches and (millimeters)

RATINGS AND CHARACTERISTIC CURVES (MBRF1635 THRU MBRF16150)

FIG.1- FORWARD CURRENT DERATING CURVE

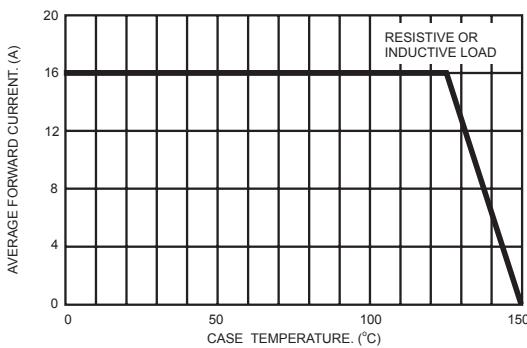


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

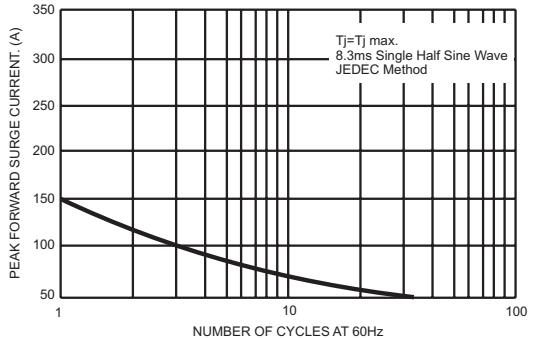


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

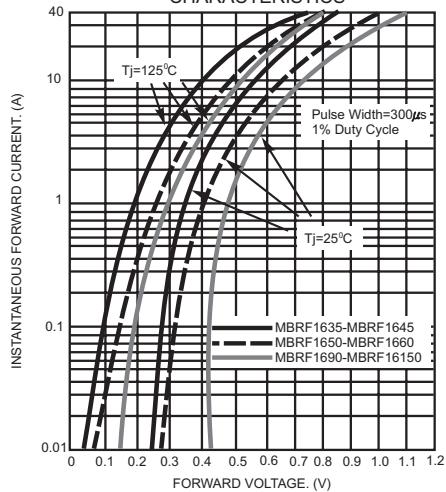


FIG.4- TYPICAL REVERSE CHARACTERISTICS

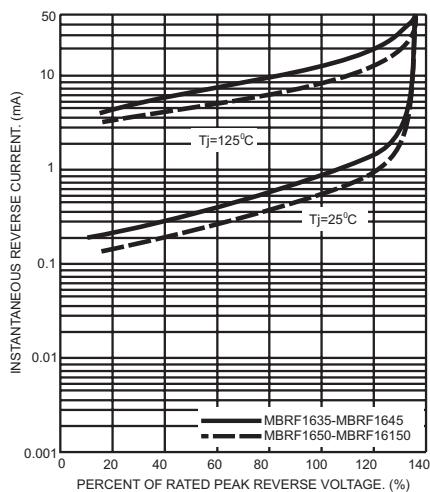


FIG.5- TYPICAL JUNCTION CAPACITANCE


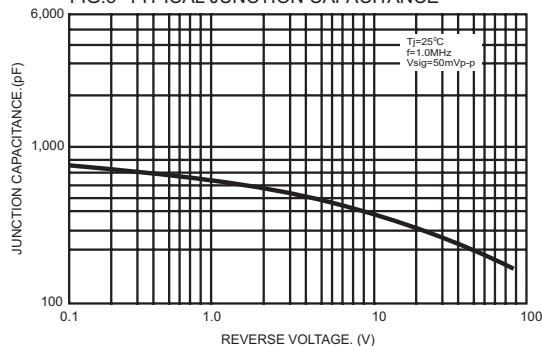


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE

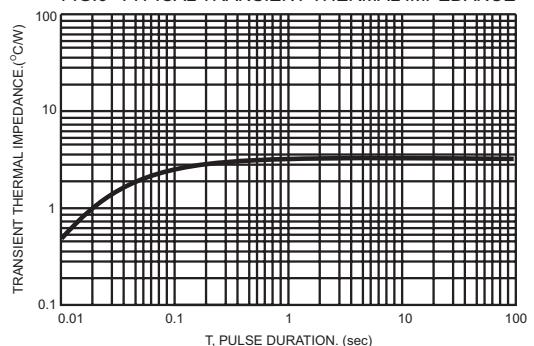

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Taiwan Semiconductor manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)