



ED-VESA-B

Datasheet

by EDA Technology Co., Ltd

built: 2025-05-30

ED-VESA-B

VESA Adjustable Wall-mounted Bracket



Specifications

Mechanical Characteristics	
Material	Aluminum alloy and cold-rolled steel
Color	Black
Weight	About 326g
Max Load Capacity	10kg
VESA Hole Pattern	50mm/75mm/100mm
Clearance From The Wall	85mm
Installation	Wall-mounted

Dimensions



Ordering Code

Model	Description
ED-VESA-B	VESA Adjustable Wall-mounted Bracket for ED-MONITOR

Packing List

- 1 x ED-VESA-B (including 4 x M6*40 screws, 4 x M6*40 plastic expansion tubes, 4 x M4*5 screws, 1 x rivet, 2 x washers and 1 x handle screw)

Installation

Parts List:

NO.	Name	Quantity (PCS)
①	ED-VESA-B	1
②	ED-MONITOR (Not provided)	1


Preparation:

You have acquired the tools, including an electric drill, a pencil, a hammer, a screwdriver, and other equipment.

Steps:


1. Mark the drilling positions:

- Use a pencil to mark the positions of the 4 mounting holes on the wall, based on the screw hole spacing of the bracket Base Plate.

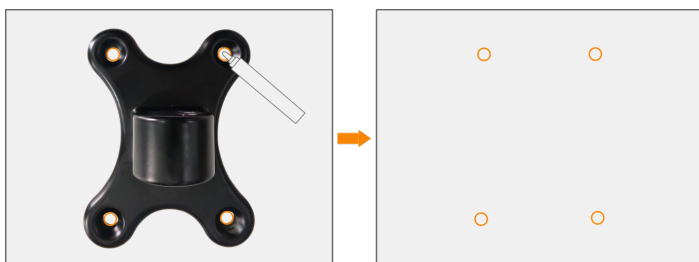

2. Drill and install Plastic Expansion Tubes:

- ① Drill 4 holes at the marked positions using an electric drill.
- ② Use a hammer to insert the 4 Plastic Expansion Tubes into the holes.

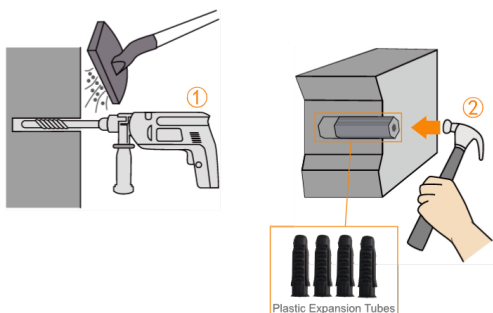

3. Secure the Base Plate to the wall:

- ① Align the 4 screw holes on the bracket Base Plate with the installed Plastic Expansion Tubes.
- ② Insert the 4 mounting screws (M6*40) through the holes and tighten them clockwise with a screwdriver to fix the Base Plate firmly to the wall.



4. Attach the bracket Panel to the ED-MONITOR:

- ① Align the 4 screw holes on the bracket Panel with the 4 VESA mounting holes on the back of the ED-MONITOR.
- ② Insert 4 mounting screws (M4*5) and tighten them clockwise with a screwdriver to secure the Panel to the back of ED-MONITOR.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Mounting Fixings](#) category:

Click to view products by [EDATEC](#) manufacturer:

Other Similar products are found below :

[5912235-1 REV -](#) [71-344699-4S](#) [7717-8DAP](#) [HD7-1](#) [14320](#) [NT20SATT01](#) [89078GBESR](#) [9150700000](#) [BACC47CN2S](#) [ELXA051G1](#)
[1453315-11](#) [71-148608-2S](#) [H373247-15](#) [85054GBESR](#) [860099-1](#) [DM 330](#) [197-007](#) [BRKT-ND](#) [197-003](#) [1960004544](#) [CF81GHZMHDW](#)
[61104-01](#) [20011292N025050000](#) [DVA.4-40-20-M8-23-70](#) [GN 2277-ALN-20-K-30-A](#) [GN 2279-ALS-14-K-30-A](#) [GN 2280-ALN-20-K-30](#)
[GN 237-ZD-60-60-C-SR](#) [KALM-16](#) [189888-2](#) [G4-PEM-NUTS](#) [89309-00](#) [KJE-POGES 100K1](#) [M050NAHF](#) [POBW 150/20K](#) [451928](#)
[452413](#) [451521](#) [TPE-POB 100S](#) [3.ST27-1.001](#) [3.STZH3.001](#) [BPPB 0801 2100H](#) [GN 1362-NI-80-80-A-BL](#) [GN 1364-NI-105-50-B-BL](#) [GN](#)
[1364-NI-140-50-B-BL](#) [GN 136-NI-120-60-B](#) [GN 136-NI-50-50-A](#) [GN 136-NI-50-50-B](#) [GN 136-NI-50-50-C](#) [GN 136-NI-50-75-B](#)