

ISP621-1X, ISP621-2X, ISP621-4X  
ISP621-1, ISP621-2, ISP621-4



# ISOCOM

---

## COMPONENTS



### HIGH DENSITY MOUNTING PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS

#### APPROVALS

- UL recognised, File No. E91231  
Package Code " EE "

#### 'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead form :-
  - STD
  - G form
  - SMD approved to CECC 00802
- Certified to EN60950 by:-  
Nemko - Certificate No. P01102465

#### DESCRIPTION

The ISP621-1, ISP621-2, ISP621-4 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photo transistors in space efficient dual in line plastic packages.


#### FEATURES

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High Current Transfer Ratio (50% min)
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- High BV<sub>CEO</sub> (55Vmin)
- All electrical parameters 100% tested
- Custom electrical selections available


#### APPLICATIONS

- Computer terminals
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances


**OPTION SM**  
**SURFACE MOUNT**



**OPTION G**




ISP621-1X  
ISP621-1








Dimensions in mm

ISP621-2X  
ISP621-2

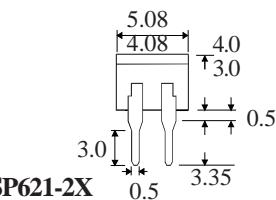

ISP621-4X  
ISP621-4

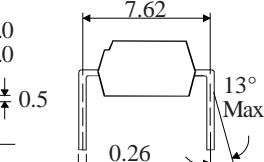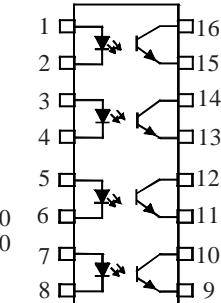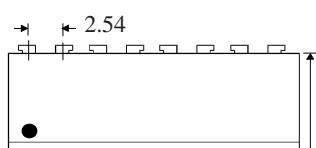

**ISOCOM COMPONENTS LTD**  
Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1UD  
Tel: (01429) 863609 Fax: (01429) 863581

**ABSOLUTEMAXIMUMRATINGS**  
(25°C unless otherwise specified)

Storage Temperature	-55°C to +125°C
Operating Temperature	-30°C to +100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUTDIODE**

Forward Current	50mA
Reverse Voltage	5V
Power Dissipation	70mW

**OUTPUTTRANSISTOR**

Collector-emitter Voltage BV <sub>CEO</sub>	55V
Emitter-collector Voltage BV <sub>ECO</sub>	6V
Collector Current	50mA
Power Dissipation	150mW

**POWERDISSIPATION**


Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

**ELECTRICAL CHARACTERISTICS ( T<sub>A</sub> = 25°C Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V <sub>F</sub> )	1.0	1.15	1.3	V	I <sub>F</sub> = 10mA
	Reverse Current (I <sub>R</sub> )			10	µA	V <sub>R</sub> = 4V
Output	Collector-emitter Breakdown (BV <sub>CEO</sub> ) ( Note 2 )	55			V	I <sub>C</sub> = 0.5mA
	Emitter-collector Breakdown (BV <sub>ECO</sub> ) Collector-emitter Dark Current (I <sub>CEO</sub> )	6		100	V nA	I <sub>E</sub> = 100µA V <sub>CE</sub> = 24V
Coupled	Current Transfer Ratio (CTR) (Note 2) ISP621-1, ISP621-2, ISP621-4	50		600	%	5mA I <sub>F</sub> , 5V V <sub>CE</sub>
	CTR selection available GB	100		600	%	
	BL	200		600	%	
	GB	30			%	1mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
	Collector-emitter Saturation Voltage V <sub>CE (SAT)</sub> GB			0.4	V	8mA I <sub>F</sub> , 2.4mA I <sub>C</sub>
	Input to Output Isolation Voltage V <sub>ISO</sub>	5300			V <sub>RMS</sub>	1mA I <sub>F</sub> , 0.2mA I <sub>C</sub>
		7500			V <sub>PK</sub>	See note 1
	Input-output Isolation Resistance R <sub>ISO</sub>	5x10 <sup>10</sup>			Ω	See note 1
	Rise Time, tr Fall Time, tf		4		µs	V <sub>IO</sub> = 500V (note 1)
			3		µs	V <sub>CE</sub> = 2V, I <sub>C</sub> = 2mA, R <sub>L</sub> = 100Ω

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

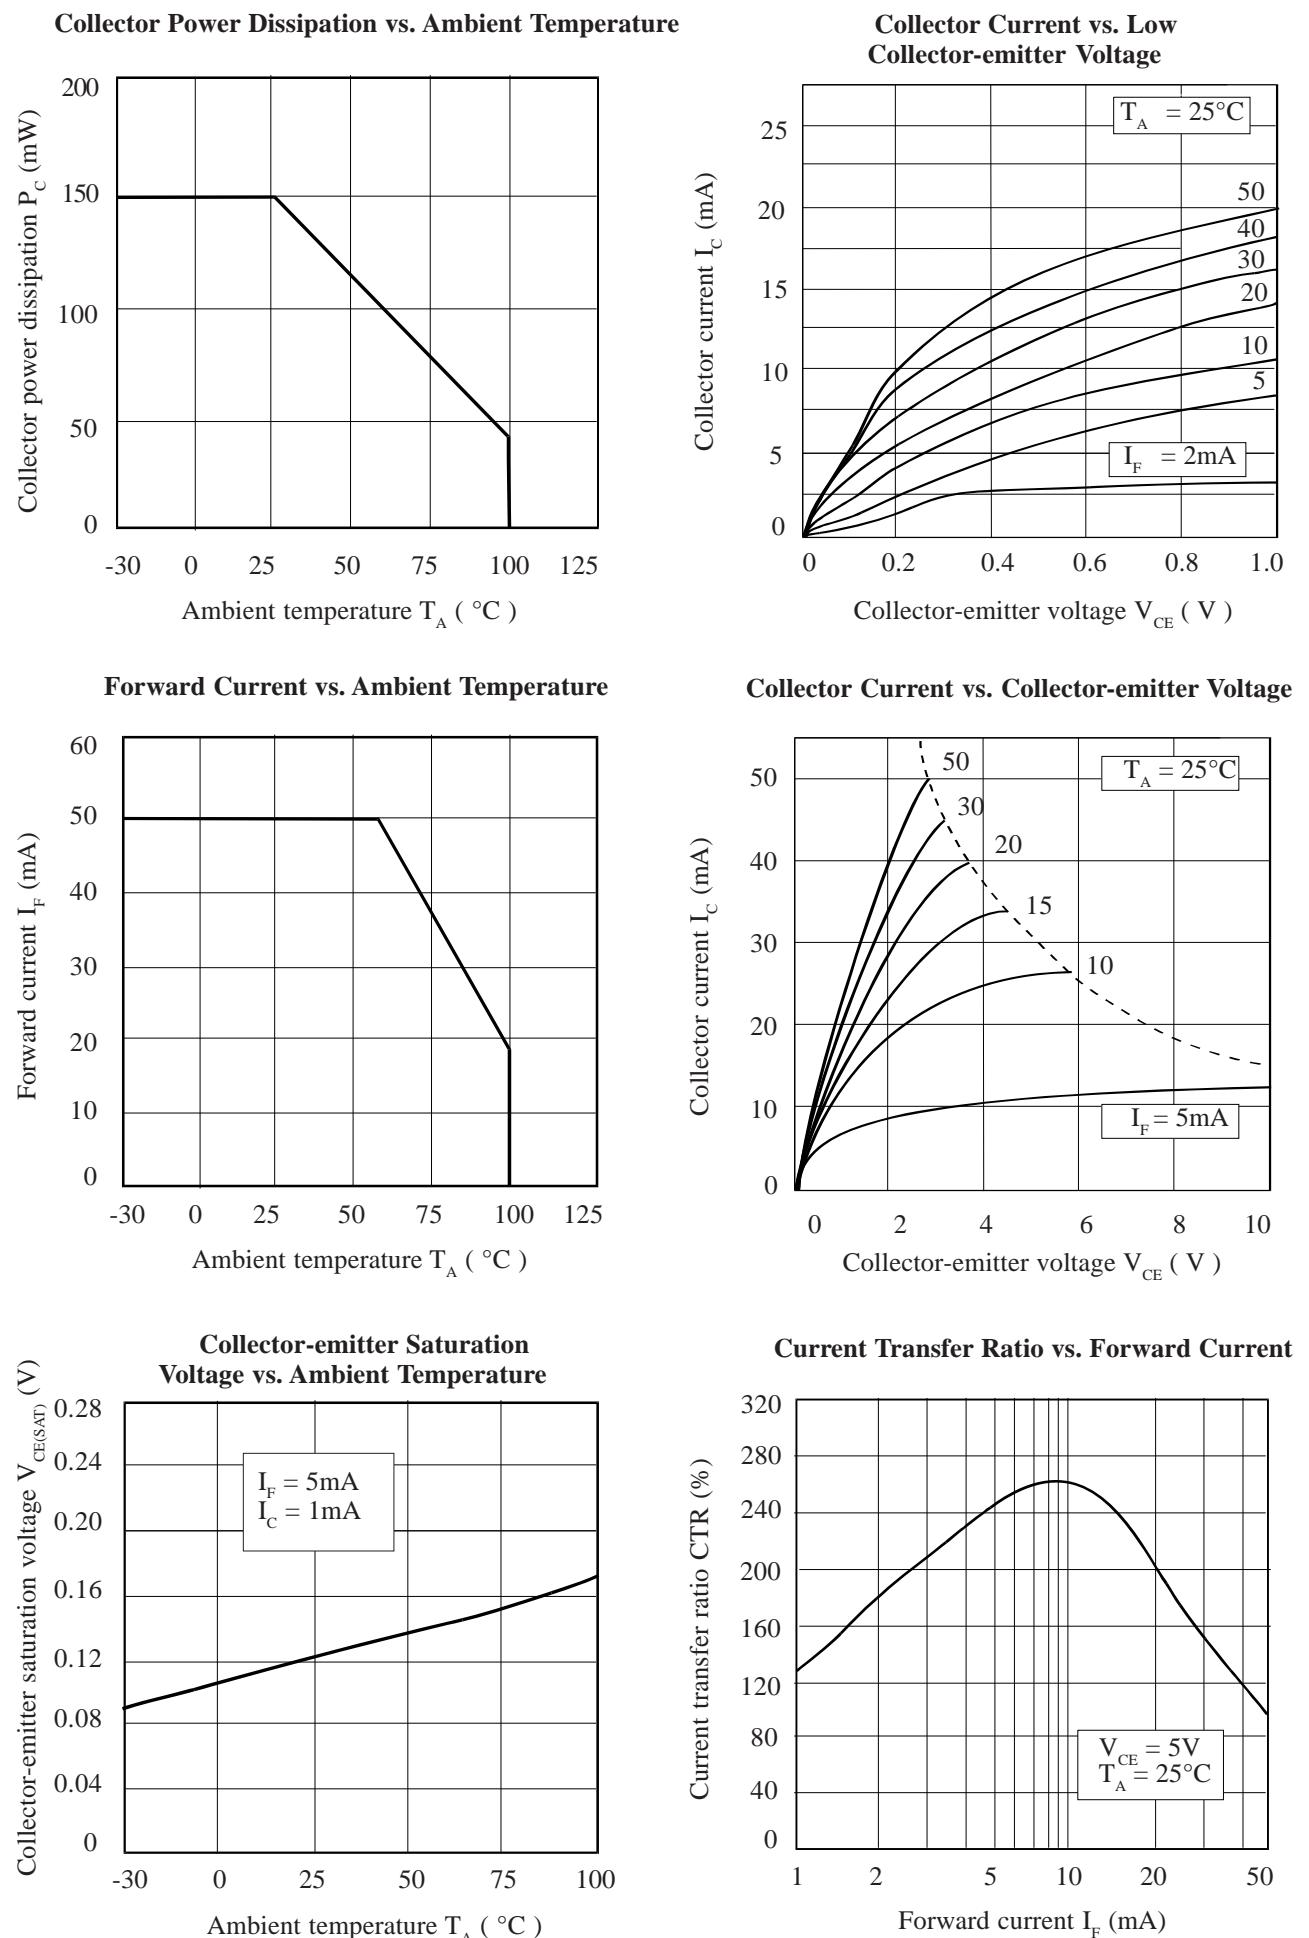

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET Output Optocouplers category:***

***Click to view products by Isocom manufacturer:***

Other Similar products are found below :

[TLP3131\(F\)](#) [TLP598GAF](#) [CPC2014NTR](#) [TLP4026G\(F\)](#) [LTV-817S-B](#) [CPC2017NTR](#) [TLP152\(TPL,E\(T](#) [PS2505L-4-E3-A](#) [TLP3106A\(TP,F](#)  
[TLP3107A\(F](#) [TLP3106A\(F](#) [TLP4176A\(F](#) [TLP3149\(F](#) [TLP3147\(F](#) [TLP3145\(F](#) [TLP3146\(F](#) [TLP3149\(TP,F](#) [H11AV1XSM](#) [CNY17-1-000E](#)  
[CNY17-1-300E](#) [CNY17-1S](#) [CNY17-2-000E](#) [CNY17-2S](#) [CNY173SR2VM](#) [CNY17-4-000E](#) [HCPL-181-06DE](#) [HCPL-J312-000E](#) [LTV-3120S-](#)  
[TA1](#) [LTV-817-L](#) [LTV-817M-D](#) [LTV-817S-A](#) [LTV-817S-TA1-L](#) [TIL111](#) [TIL191](#) [MCT6X](#) [MCT6XSM](#) [TLP170A\(F\)](#) [TLP170G\(F\)](#)  
[TLP197GA\(F\)](#) [TLP197G\(TP,F\)](#) [TLP222A-2\(LF1,F\)](#) [TLP291\(GR-TP.E\(O](#) [TLP597A\(F\)](#) [TLP797J\(F\)](#) [4N35X](#) [4N35XSM](#) [MOC213M](#)  
[HMHA2801R2](#) [ILD1XSM](#) [ILQ2X](#)