

### Features

- Supports 0-10V/PWM/Rx dimming
- Output current adjustable via a DIP switch
- Surge: L-N 2kV
- Flicker free
- IP20
- Suitable for Class II light fixtures
- 5-year warranty (please refer to the warranty condition)



### Applications


· Indoor office lighting · decorative lighting · commercial lighting · residential lighting

### Descriptions

LF-ABA012B-0300-42 is a constant current LED driver with the maximum output power of 12.6W. Its rated input voltage range from 220 to 240Vac and its output current can be adjusted via a DIP switch from 150mA to 300mA with every 50mA as a step. Besides, it has all-round protections, including open circuit protection and short circuit protection. It is suitable for panel light, downlight and so on.

### Product Model

LF - ABA 012B - 0300 - 42

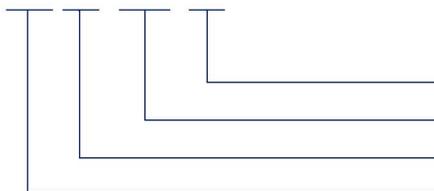

- 42: output voltage: 42V
- 0300: output current: 300mA
- 012: rated power: 12W
- ABA: indoor 3-in-1 dimming LED driver series

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, No.26, Xinhe Road, Bao'an District, Shenzhen City, China.  
Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Area, Meishan City, Sichuan, China.  
Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

■ **Electrical Characteristics**


Model		LF-ABA012B-0300-42				
<b>Output</b>	Output Voltage	25-42V				
	Output Current	150mA	200mA	250mA	300mA	
	Ripple current (≤100Hz)	±3.3%				
	Flicker Index	IEC-Pst≤1, CIE SVM≤0.4 Complies with IEEE Std 1789-2015.				
	Current Tolerance	±5% <sup>①</sup>				
	Temperature Drift	±10%				
	Startup Time	<0.7S				
<b>Input</b>	Rated Input Voltage	220-240Vac				
	Input Voltage Range	198-264Vac				
	Input Frequency	50/60Hz <sup>②</sup>				
	Input Current	0.15A max.				
	PF	≥0.9				
	THD	<15%				
	Efficiency	≥82.5%				
	Inrush Current	<20A&350uS				
	Loading Quantities of Circuit Breaker	Model	B10	C10	B16	C16
		Quantity (pcs)	31	50	52	83
	Leakage Current	<0.7mA				
Standby Power Consumption	≤0.5W (dim to off)					
<b>Protections</b>	Open Circuit	<59V				
	Short Circuit	Hiccup mode (auto-recovery)				
<b>Environment Descriptions</b>	Operating Temperature	-30°C - +45°C				
	Operating Humidity	20-90%RH (without condensation)				
	Storage Temperature/ Humidity	-40°C~+80°C (6 months in Class I environment); 10-90%RH (without condensation)				
	Atmospheric Pressure	86-106kPa				
<b>Surge</b>	L-N	2kV				

■ **Electrical Characteristics**


<b>Safety and EMC</b>	Certifications	ENEC, CE, RCM, CCC, UKCA
	Withstanding Voltage	I/P-O/P: 3.75kV&5mA&60S; I/P-DIM: 1.5kV&5mA&60S; O/P-DIM: 1.5kV&5mA&60S
	Insulation Resistance	I/P-O/P: >100MΩ@500VDC; I/P-DIM: >100MΩ@500VDC; O/P-DIM: >100MΩ@500VDC
	Safety Standards	ENEC: EN61347-1:2015, EN 61347-2-13:2014/A1:2017, EN 62384: 2020 CE-LVD: EN 61347-2-13:2014/A1:2017, EN 61347-1:2015, EN 62493:2015 RCM:AS 61347.2-13:2018 SAA:AS 61347.1:2016+A1:2018 AS 61347.2.13:2018 CCC:GB19510.1-2009, GB19510.14-2009 UKCA: BS EN IEC 55015: 2019+A11: 2020, BS EN 61547: 2009,BS EN IEC 61000-3-2: 2019, BS EN 61000-3-3: 2013/A2: 2021
	EMI	CE-EMC/RCM:EN55015, EN61000-3-2, EN61000-3-3 CCC:GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2,3,4,5,6,11 CCC:GB/T17626.2,3,4,5,6,11
<b>Other Parameters</b>	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Tc Max	90°C
	Warranty Condition	5 years (Tc ≤86°C)
	Noise Level	≤25dB (this data is measured in a soundproof room and the noise collector should be 10CM away from LED driver)
<b>Testing Equipment</b>	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test) Everfine LFA-3000, etc.	
<b>Additional Remarks</b>	<p>1. It is recommended that user install over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.</p> <p>2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.</p> <p>3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current.</p> <p>4. The above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac without any special remarks.</p> <p>5. Lifud reserves the right to interpret any of the above parameters.</p> <p>Note:</p> <p>① Current tolerance is 7% when the current is 150-200mA; current tolerance is 5% when the current is 250-300mA.</p> <p>②DC input is not supported.</p>	

**Product Characteristic Curves**


Working Window Curve

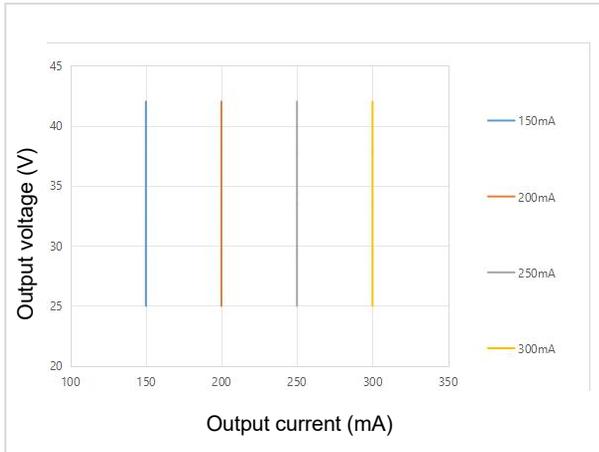


Efficiency Curve

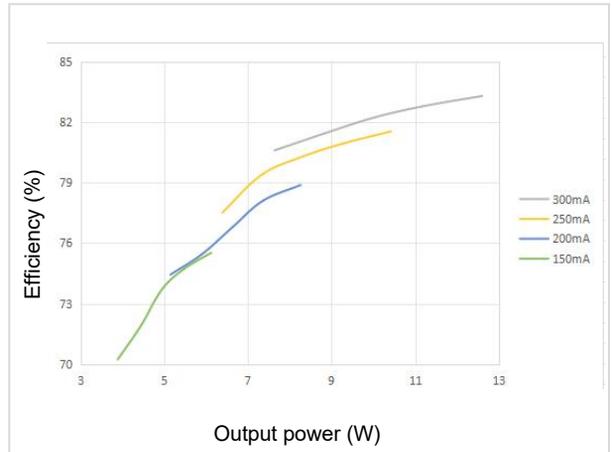


PF Curve

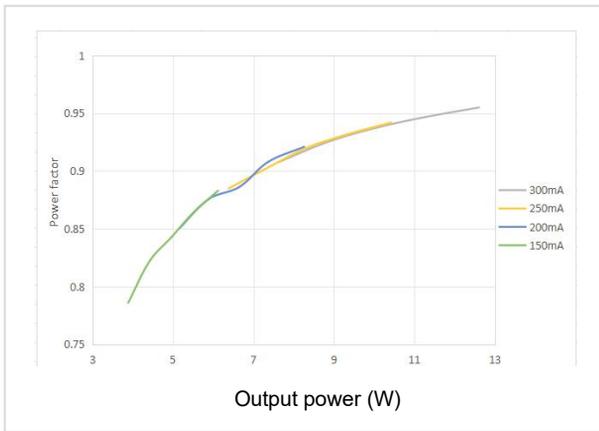

THD Curve

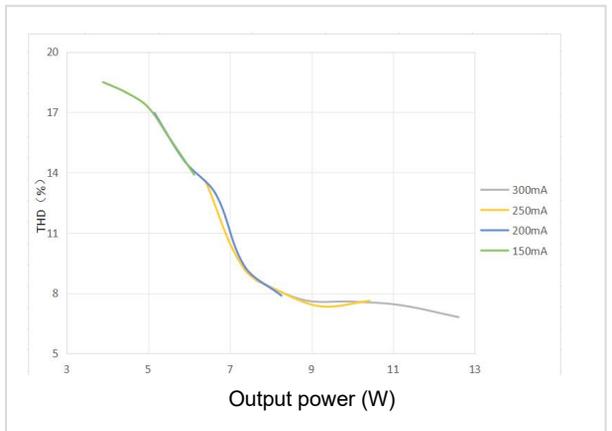

Lifetime Curve

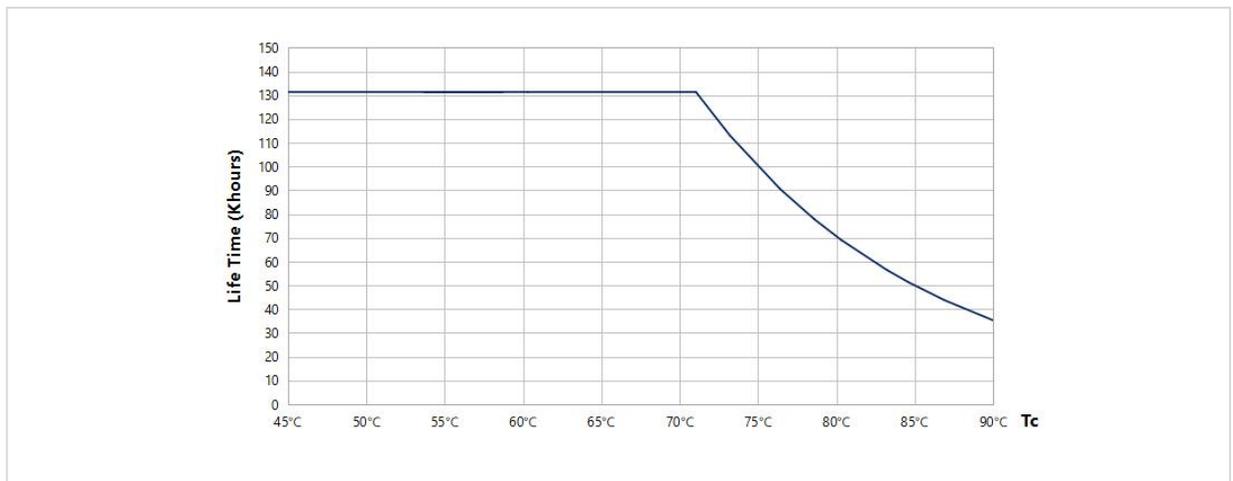


**Lifud Technology Co., Ltd.**

Production Base I (HQ): Building B, Kutto Industrial Park, No.26, Xinhe Road, Bao'an District, Shenzhen City, China.  
 Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Area, Meishan City, Sichuan, China.  
 Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

■ **Product Characteristic Curves**

Tc Point Testing Diagram

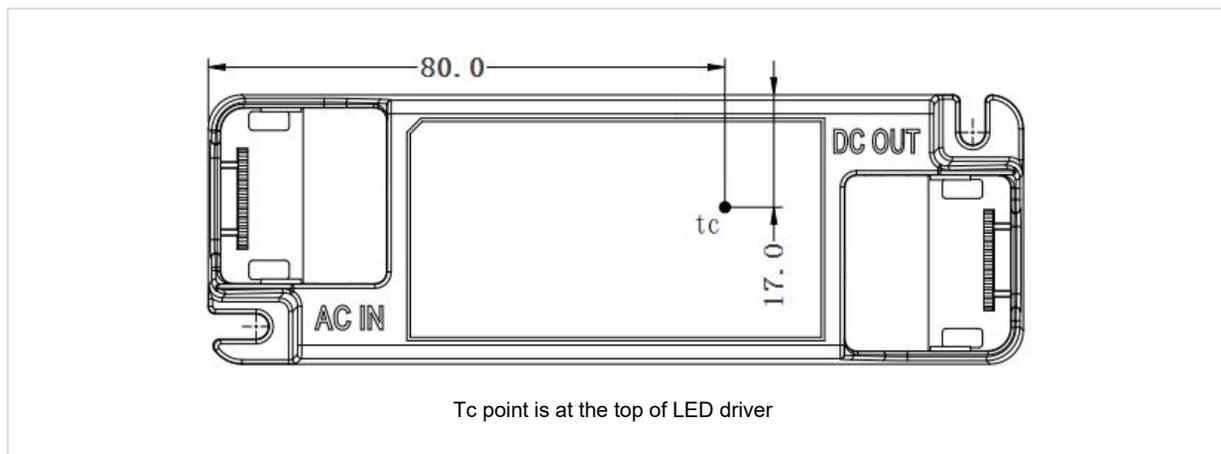

■ **Definitions of Product Terminals**

INPUT		OUTPUT	
AC-L	Input terminal of AC live wire	LED+	Positive electrode output of LED driver
AC-N	Input terminal of AC neutral wire	LED-	Negative electrode output of LED driver
/	/	DIM+	Positive electrode of dimming
/	/	DIM-	Negative electrode of dimming

■ **Definitions of DIP Switch**


Vo DC	I rated (CC)	1	2
25-42V	300mA	ON	ON
	250mA	-	ON
	200mA	ON	-
	150mA	-	-

Remark: “-”: shift OFF. Please do not use the DIP switch when the LED driver is powered on. If DIP switch function needed, please disconnect input AC power supply first.


0-10V Dimming Operation

- Connect 0-10V signal to DIM terminal.
- In 0-10V dimming mode, when the input voltage is  $0.56V \pm 0.05V$ , the light turns on. When it's  $0.35V \pm 0.1V$ , the light turns off @ $U_o \text{ max} \& T_a = 25^\circ C$ .
- Dimming depth: 3%
- DIM+/- (without signal connected): 100% rated current output

Wiring Diagram of 0-10V Dimming

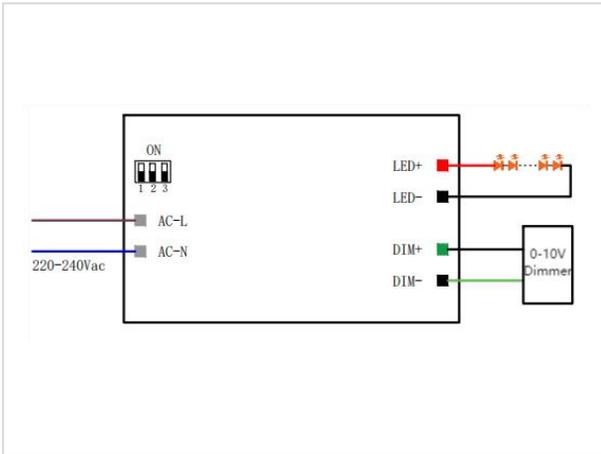

Dimming Curve of Dim-to-Off Version

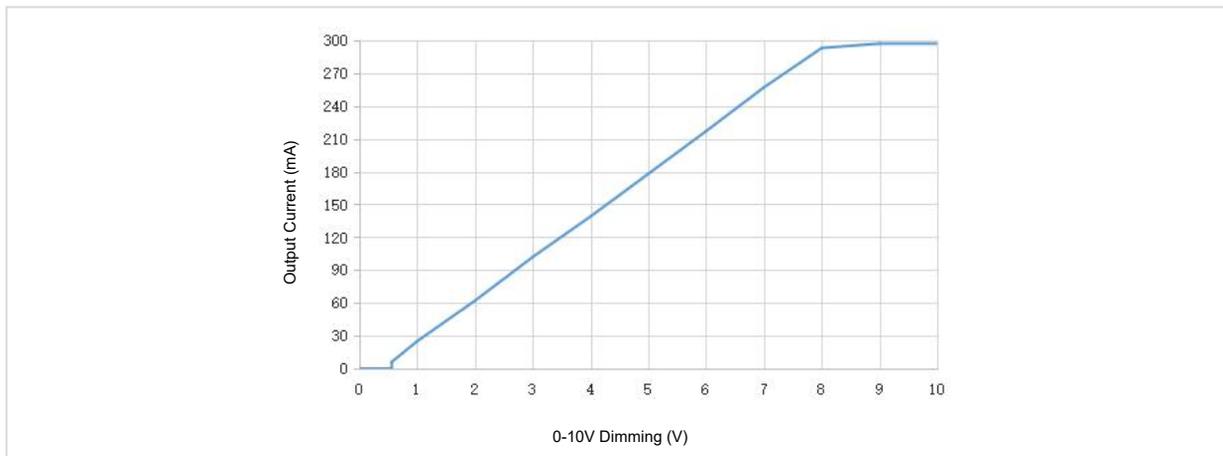


Input: 230Vac, output: 42Vdc/300mA (The data is measured by Lifud 0-10V dimmer and the chart is for reference only)


### PWM Dimming Operation

- Connect PWM signal to DIM terminal.
- Compatible signal range: 400-1000(Hz); amplitude: 9-10(V)  
When it is  $5\% \pm 1\%$ , the light turns on;  
when it is  $3\% \pm 1\%$ , the light turns off.  
@ $U_o \text{ max} \& T_a = 25^\circ\text{C}$
- Dimming depth: 3%
- DIM+/- (without signal connected): 100% rated current output

### Wiring Diagram of PWM Dimming

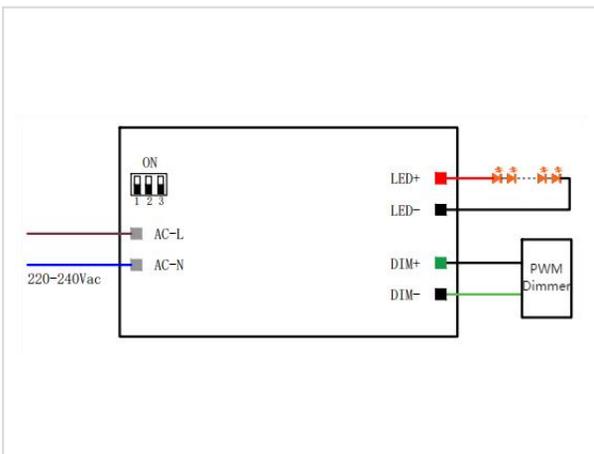

### Dimming Curve of Dim-to-Off Version

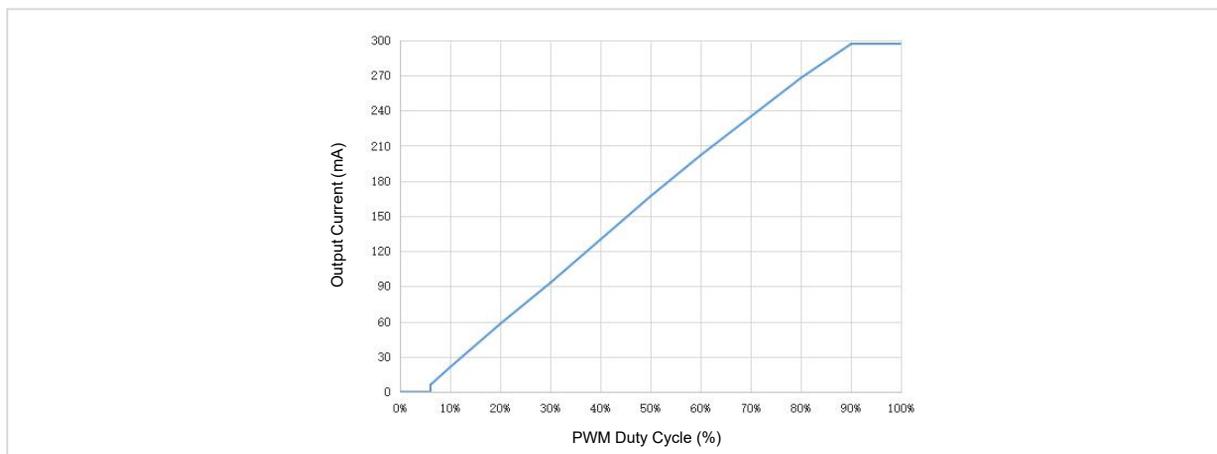


Input: 230Vac, output: 42Vdc/300mA (The data is measured by PWM signal generator RIGOL and the chart is for reference only)


**Rx Dimming Operation**

- Connect Rx signal to DIM terminal.
- Range: 0-100KΩ@Uo max&Ta=25°C  
When it is 5KΩ ± 1KΩ, the light turns on;  
when it is 3KΩ ± 1KΩ, the light turns off.
- Dimming depth: 3%
- DIM+/- (without signal connected): 100% rated current output

**Wiring Diagram of Rx Dimming**

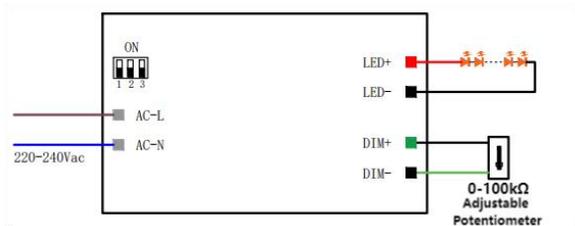


**Dimming Curve of Dim-to-Off Version**

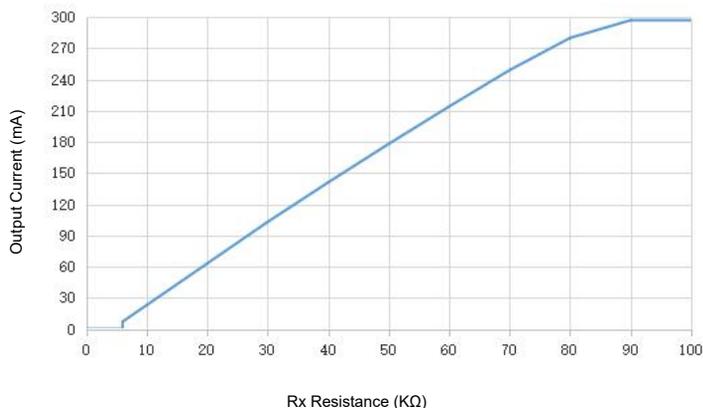

Input: 230Vac, output: 42Vdc/300mA (The data is measured by LEVITON dimmer and the chart is for reference only)

■ **Structure & Dimensions (unit: mm)**

Model	Overall Appearance Dimension (L*W*H)	Distance Between 2 Positioning Holes (L*W)	Diameter of Positioning Hole
LF-ABA012B-0300-42	121.9*39.9*25 mm (±0.5mm)	107.2 mm (±0.5mm)	3.7 mm

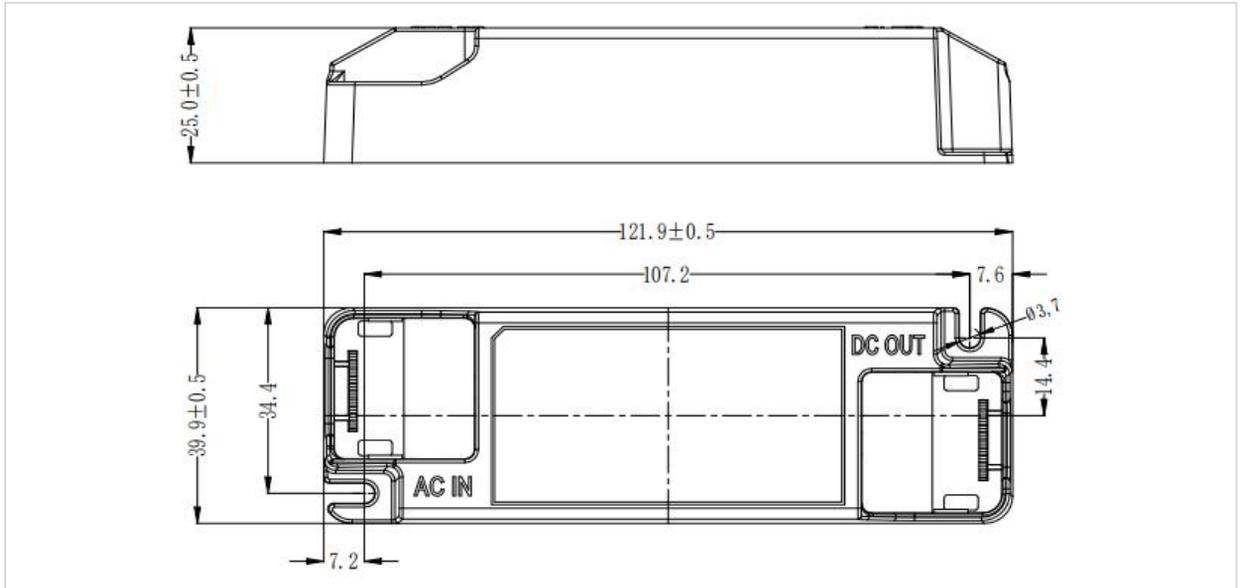

■ **Packaging Specifications**

Model	LF-ABA012B-0300-42
Carton Size	385*285*210 mm (L*W*H)
Quantity	14 pcs/layer; 7 layers/ctn; 98 pcs/ctn
Weight	0.086kg ± 5% /pc; 8.3 kg ± 5% /ctn

## ■ Transportation and Storage

### 1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

### 2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

## Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Lifud Technology](#) manufacturer:*

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [OECCDD02-350](#) [OECCDD02-700](#) [OECCDD02-300](#) [OECCDD02-450](#) [OECCDD02-600](#)  
[ESS015W-1000-12](#) [ESS030W-1050-21](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [OTE 25/220-240/700 PC](#) [OT FIT 30/220-240/700 CS](#)  
[DAL50W-0850-56-T](#) [CNB50W-1200-42-CAS](#) [87500757](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2](#)  
[PLUG 2000MA BL](#) [LC 50/200-350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LCA 60W 900-1750MA ONE4ALL C](#)  
[PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA](#)  
[60W 24V ONE4ALL SC PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR](#)  
[SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT](#)  
[35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-](#)  
[700MA FLEXC SR EXC](#) [LC 14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#) [LC 65W 200-350MA 210V FLEXC LP SNC4](#) [LC](#)  
[60/1400/43 FIXC SR SNC2](#) [LC 75W 250-400MA 220V O4A LP ADV](#) [4880](#) [PWM-60-24DA2](#) [PWM-90-48DA2](#) [8538](#) [LC 165/400-700/320](#)  
[FLEXC LP SNC4](#) [LCO 40W 200-1050MA 64V O4A NF C EXC3](#)