


SE-100T SERIES

Ground-Fault-Relay Tester

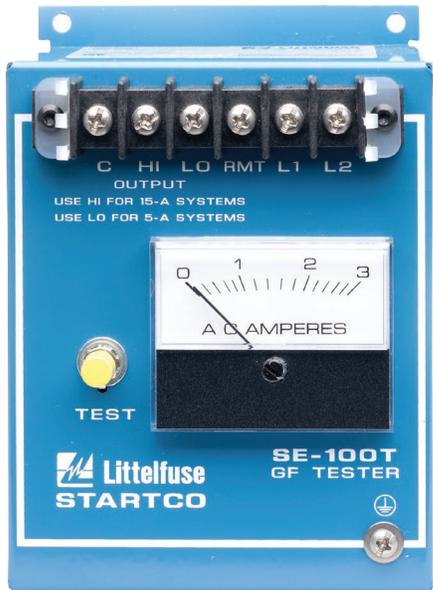

Description

The SE-100T is a ground-fault-relay test unit designed to test the current pickup level of ground-fault protection.

The tester injects current through the window of installed ground-fault current transformers to verify the operation of ground-fault monitors and relays.


It is used on substations, motor control centers (MCCs), central distribution panels, switchboards, and test benches to verify relay operation.

The SE-100T tests the entire ground-fault circuit including current transformers, wiring, ground-fault relay and the operation of the interrupting device. It is recommended to test every relay and its current interrupting device annually.

Features & Benefits

FEATURES	BENEFITS
Output Current Levels	Low and high output levels to test a variety of relays
Remote Test Input	Allows test to be initiated from another location

Simplified Circuit Diagram

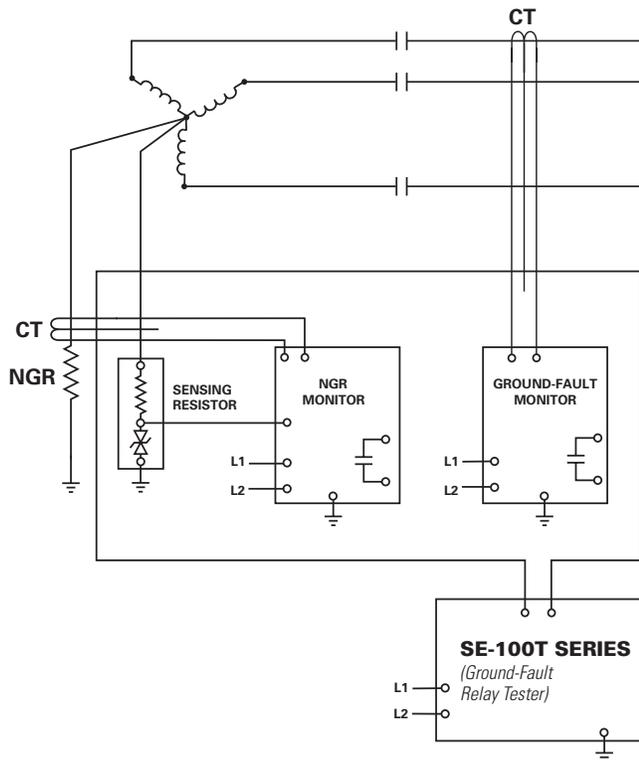

Ordering Information

ORDERING NUMBER	CONTROL POWER
SE-100T	120 Vac

Specifications

Input Voltage	120 Vac, 60 Hz ⁽¹⁾ , 30 VA
Dimensions	H 150 mm (5.9"); W 109 mm (4.3"); D 100 mm (4.0")
Output Current Levels	LO = 0.65 ± 0.1 A HI = 2.75 ± 1.5A
Output Voltage	6.3 Vac maximum
Approvals	CSA certified
Conformally Coated	Standard feature
Warranty	5 Year
Mounting	Surface

Note (1) Also verified at 50 Hz.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Relays](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [7-1618273-3](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-325-159](#) [FCA-410-138](#) [8000-S3121](#) [8-1618273-6](#)
[8-1618393-1](#) [GCA63A220VAC60HZ](#) [GCA63A277VAC60HZ](#) [GCA63A600VAC60HZ](#) [1-1672275-3](#) [1-1833005-4](#) [H-16/S1](#) [A711Z](#) [H-8C](#)
[H-8/S11](#) [H-8/S68](#) [ACC530U20](#) [ACC730U30](#) [RF303ZM4-12](#) [DH18DA](#) [1423675-8](#) [AR4-15F13-C01](#) [AR7-41F11](#) [AVR907](#) [15732A200](#)
[B07B032AC1-0329](#) [B329](#) [B490A](#) [1618279-1](#) [BHR124Y](#) [1810DDB-SX](#) [N417](#) [P30C42A12D1-120](#) [2-1617748-6](#) [2-1618375-1](#) [2-1618396-6](#)
[2-1618398-1](#) [JMAPD-5XL](#) [JMGACD-5M](#) [JMGSC-5LW](#) [JMGSCD-5L](#) [PBO-18A1218](#) [PBO-40A3040](#) [K8DSPH1200480VAC](#) [KA-3C-12A](#)