


BCP51,52,53


SOT-223 Transistor(PNP)



1. BASE
2. COLLECTOR
3. EMITTER

Features

- ✧ For AF driver and output stages
- ✧ High collector current
- ✧ Low collector-emitter saturation voltage
- ✧ Complementary types: BCP54...BCP56 (NPN)

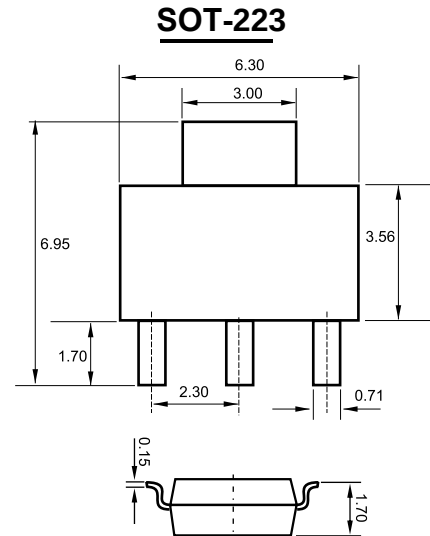

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Dimensions in inches and (millimeters)

Symbol	Parameter	BCP51	BCP52	BCP53	Units
V_{CBO}	Collector-Base Voltage	-45	-60	-100	V
V_{CEO}	Collector-Emitter Voltage	-45	-60	-80	V
V_{EBO}	Emitter-Base Voltage	-5			V
I_C	Collector Current -Continuous	-1			A
P_C	Collector Power Dissipation	1.5			W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	94			$^{\circ}\text{C}/\text{W}$
T_{stg}	Storage Temperature Range	-65to+150			$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}\text{C}$ unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -0.1\text{mA}, I_E = 0$	-45 -60 -100		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10\text{mA}, I_B = 0$	-45 -60 -80		V
Base-emitter breakdown voltage	$V_{(BR)EBO}$	$I_C = -10\mu\text{A}, I_E = 0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB} = -30\text{V}, I_E = 0$		-100	nA
DC current gain	$h_{FE(1)}$	$V_{CE} = -2\text{V}, I_C = -5\text{mA}$	25		
	$h_{FE(2)}$	$V_{CE} = -2\text{V}, I_C = -150\text{mA}$	63	250	
	$h_{FE(3)}$	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$	25		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -500\text{mA}, I_B = -50\text{mA}$		-0.5	V
Base-emitter voltage	V_{BE}	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$		-1	V
Transition frequency	f_T	$V_{CE} = -10\text{V}, I_C = -50\text{mA}, f = 100\text{MHz}$	100		MHz

CLASSIFICATION OF $h_{FE(2)}$

Rank	BCP51-10, BCP52-10, BCP53-10	BCP51-16, BCP52-16, BCP53-16
Range	63-160	100-250


Typical Characteristics

Total power dissipation $P_{\text{tot}} = f(T_S)$

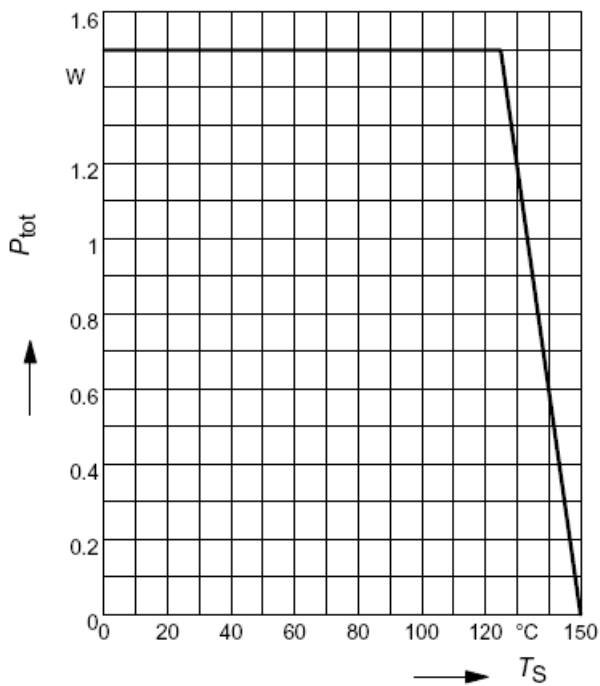


Transition frequency $f_T = f(I_C)$

$V_{CE} = 10V$

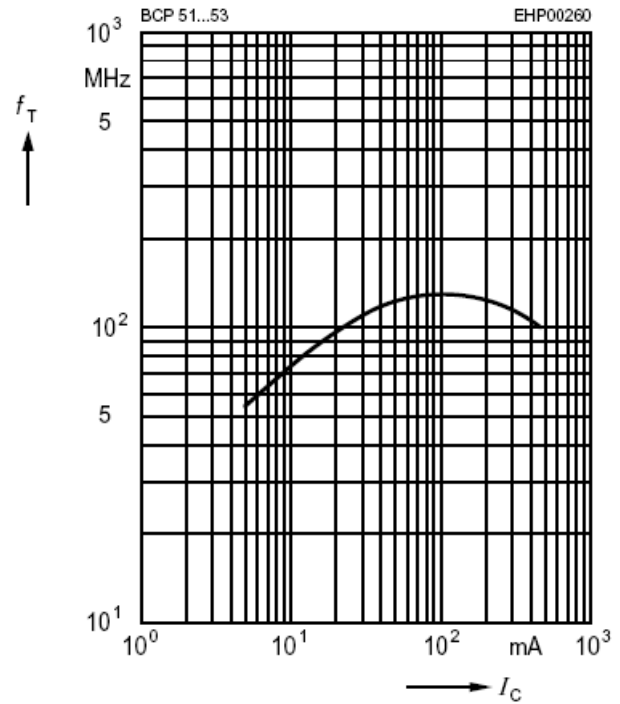


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 2V$

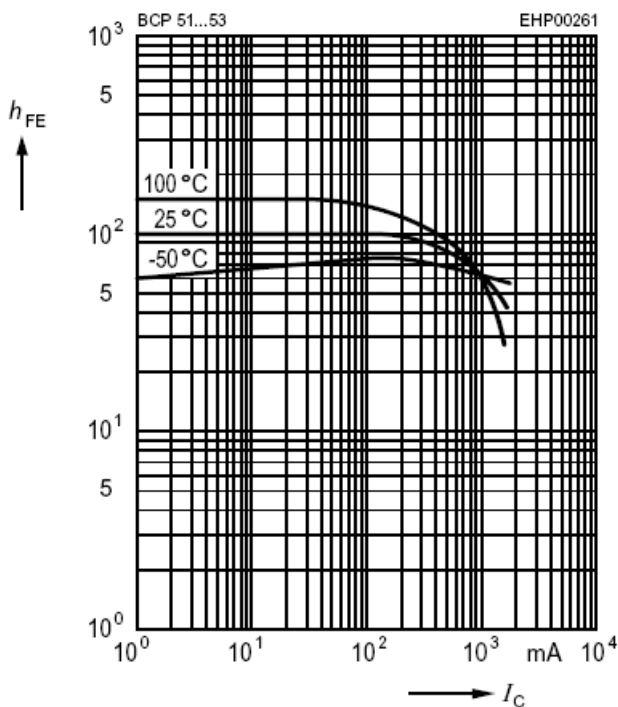

Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

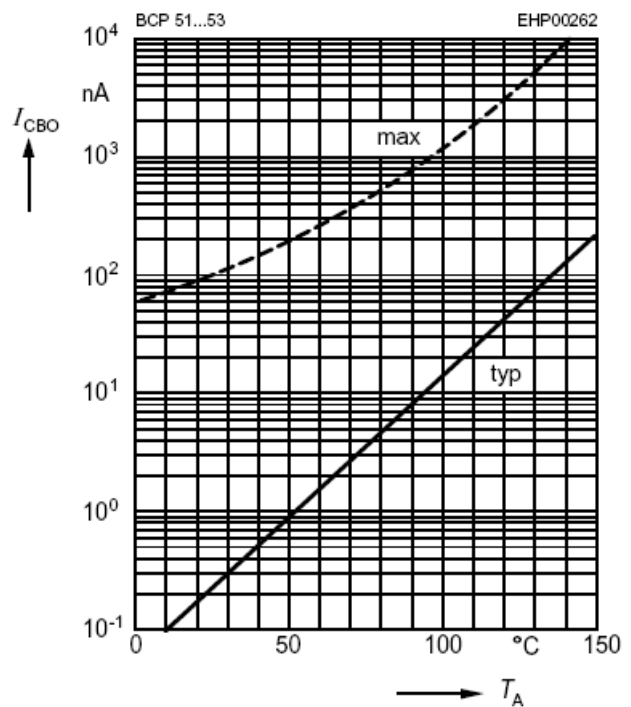


BCP51,52,53

SOT-223 Transistor(PNP)




Base-emitter saturation voltage

$$I_C = f(V_{BEsat}), h_{FE} = 10$$

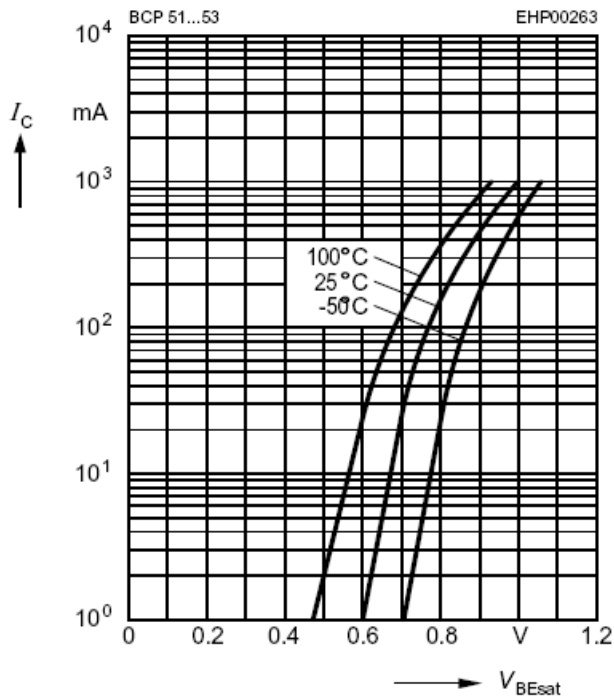


Collector-emitter saturation voltage

$$I_C = f(V_{CEsat}), h_{FE} = 10$$

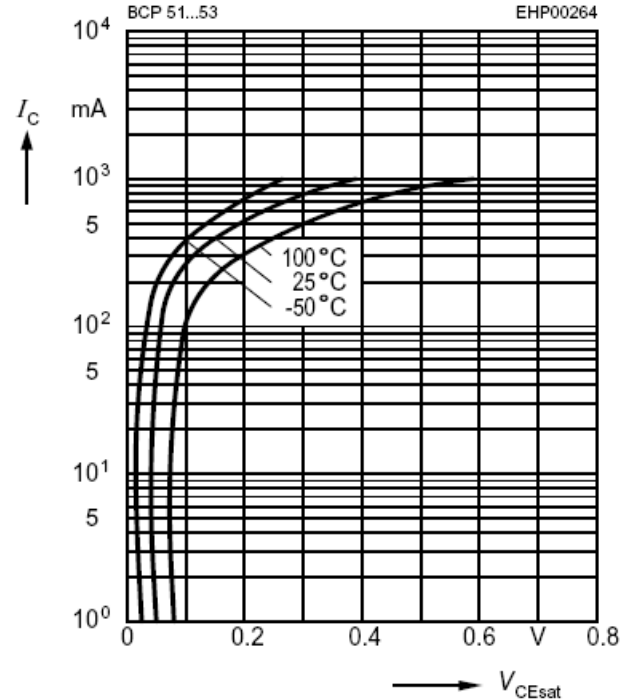

Permissible pulse load

$$P_{totmax} / P_{totDC} = f(t_p)$$

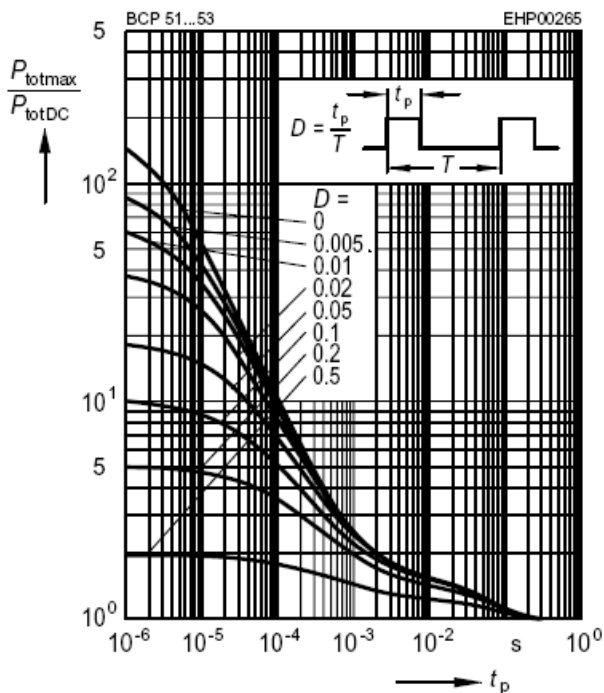

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT](#) ***category:***

Click to view products by [Luguang](#) ***manufacturer:***

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [2N4401-A](#) [2SC4731T-AY](#) [2SC5488A-TL-H](#) [FMC5AT148](#)
[2N2369ADCSM](#) [2N3904-NS](#) [2SB1324-TD-E](#) [2SC5231C8-TL-E](#) [CPH6501-TL-E](#) [Jantx2N5416](#) [BAX18/A52R](#) [BC556/112](#) [MMST8098T146](#)
[MCH6102-TL-E](#) [2N3879](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#)
[CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)
[2SD1815T-TL-E](#) [Jantxv2N3810](#) [2N6678](#) [2N2907Ae4](#) [2N3963](#) [Jantx2N5415](#) [SMBT35200MT1G](#) [SMMJT350T1G](#) [NSVDTA113EM3T5G](#)
[MBT3904DW1T1H](#) [CPH6102-TL-E](#) [CPH3245-TL-E](#) [2SD1628F-TD-E](#) [15C01SS-TL-E](#) [BC847BW-G](#) [CMLT2907A TR](#) [MSB25MH-13](#)
[CMLT5088EM TR](#)