


SINGLE 8-CHANNEL MULTIPLEXER
GENERAL DESCRIPTION

The NJU4051B is a single 8-channel multiplexer with three binary control inputs and an inhibit input.


The three binary control input signals select 1 of 8 channels to be turned on, and connect it to the single output.

The operating voltage is as wide as 3 to 18V and the quiescent current is as low as 5 μ A max. (at $V_{DD}=5V$).


It is equivalent to RCA CD4051B and Motorola MC14051B.

PACKAGE OUTLINE


NJU4051BD






NJU4051BM



NJU4051BV

FEATURES

- Wide Operating Voltage -- 3 ~ 18V
- Package Outline -- DIP/DMP/SSOP 16
- C-MOS Technology

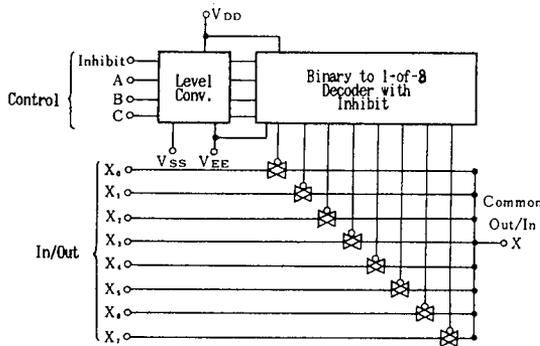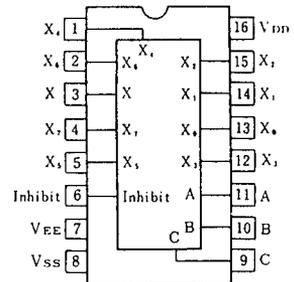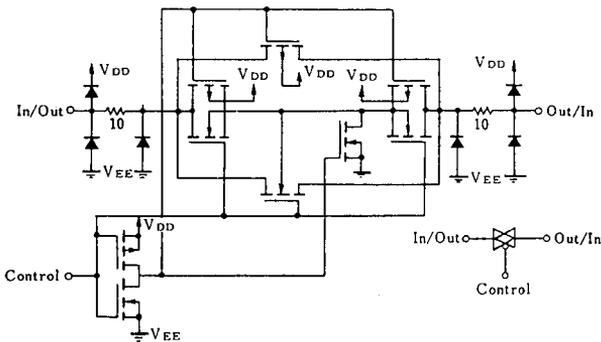BLOCK DIAGRAM

PIN CONFIGURATION

EQUIVALENT CIRCUIT

TRUTH TABLE

| INH | C | B | A | ON SW |
|-----|---|---|---|-------|
| 0 | 0 | 0 | 0 | X_0 |
| 0 | 0 | 0 | 1 | X_1 |
| 0 | 0 | 1 | 0 | X_2 |
| 0 | 0 | 1 | 1 | X_3 |
| 0 | 1 | 0 | 0 | X_4 |
| 0 | 1 | 0 | 1 | X_5 |
| 0 | 1 | 1 | 0 | X_6 |
| 0 | 1 | 1 | 1 | X_7 |
| 1 | x | x | x | None |

x : Don't care

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-------------------|--------------------------------------|------|
| Supply Voltage | $V_{DD} - V_{SS}$ | - 0.5 ~ + 20 | V |
| | $V_{DD} - V_{EE}$ | - 0.5 ~ + 20 | |
| Input Voltage | V_{IN} | - 0.5 ~ $V_{DD}+0.5$ * | V |
| Output Voltage | V_o | - 0.5 ~ $V_{DD}+0.5$ * | V |
| Input Current | I_{IN} | ± 10 | mA |
| Output Current | I_o | ± 10 | mA |
| Power Dissipation | P_D | 500 (DIP) 200 (DMP) 300 (SSOP) | mW |
| Operating Temperature Range | T_{opr} | - 40 ~ + 85 | °C |
| Storage Temperature Range | T_{stg} | - 65 ~ + 150 | °C |

 * $V_{DD}+0.5V$ must be 20V or less.

6
■ ELECTRICAL CHARACTERISTICS

• DC Characteristics

 ($V_{SS}=0V$)

| PARAMETER | SYMBOL | CONDITION | V_{DD} (V) | Ta=-40°C | | Ta=25°C | | Ta=85°C | | UNIT |
|-------------------------------|-----------------|--|---------------------|----------------------|----------------------|---------------------------|--------------------|---------|----------|------|
| | | | | MIN | MAX | MIN | TYP | MAX | MIN | |
| Quiescent Current | I_{DD} | No signal, Per Package | 5 10 15 20 | 5 10 20 100 | 5 10 20 100 | 150 300 600 3000 | | | μA | |
| On-State Resistance | R_{ON} | $0 \leq V_{i_s} \leq V_{DD}$ $V_{EE}=V_{SS}=0V$ | 5 10 15 | 500 210 140 | 220 100 60 | 600 250 160 | 800 300 200 | | Ω | |
| On-State Resistance Deviation | ΔR_{ON} | Between 2 channels, $V_{EE}=V_{SS}=0V$ | 5 10 15 | | 15 10 5 | | | | Ω | |
| Off-Channel Leakage Current | | Each channel $V_{EE}=V_{SS}=0V$ | 18 | ±1000 | ±10 | ±100 | ±1000 | | nA | |
| Input Capacitance | C_{IN} | $V_{IN}=0V$ 1N _H , A, B, C A ₀ to A ₇ | | | 5.0 10 | 7.5 | | | pF | |
| Low Level Input Voltage | V_{IL} | $R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$ $V_o=1.0V$ $V_o=1.0V$ $V_o=1.5V$ | 5 10 15 | 1.5 3.0 4.0 | 2.25 4.50 6.75 | 1.5 3.0 4.0 | 1.5 3.0 4.0 | | V | |
| High Level Input Voltage | V_{IH} | $R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$ $V_o=4.0V$ $V_o=9.0V$ $V_o=13.5V$ | 5 10 15 | 3.5 7.0 11.0 | 3.5 7.0 11.0 | 2.75 5.50 8.25 | 3.5 7.0 11.0 | | V | |
| Input Current | ± I_{IN} | $V_{IN}=0$ or 18V | 18 | ±0.1 | | ±0.1 | ±1 | | μA | |


SWITCHING CHARACTERISTICS

(Ta=25°C, CL=50pF)


| PARAMETER | | SYMBOL | CONDITIONS | V _{DD} (V) | MIN | TYP | MAX | UNIT |
|--------------------------|----------------------|----------------------|--|---------------------|------|-----|-----|------|
| Propagation Delay Time | SW Input to Output | t _{PLH} | R _L =10kΩ | 5 | 15 | 45 | ns | |
| | | t _{PHL} | | 10 | 8 | 30 | | |
| | CONT Input to Output | t _{PLH} | | 15 | 5 | 20 | | |
| | | t _{PHL} | | 5 | 15 | 45 | | |
| Output Enable Time | t _{PZH} | R _L =10kΩ | 5 | 600 | 1400 | ns | | |
| | t _{PZL} | | 10 | 250 | 700 | | | |
| Output Disable Time | t _{PHZ} | R _L =10kΩ | 5 | 600 | 1400 | ns | | |
| | t _{PLZ} | | 10 | 250 | 700 | | | |
| Sine-Wave Distortion | | | R _i =10kΩ, f=1kHz, V _{is} =5V _{P-P} | 10 | 0.05 | | % | |
| Feedthrough(all-ch. off) | | | R _i =1kΩ, 20log ₁₀ V _{os} /V _{is} =-50dB | 10 | 4.5 | | MHz | |
| Crosstalk | SW A and B | | R _i =1kΩ, V _{is} =1/2 · (V _{DD} -V _{SS}) _{P-P} , 20log ₁₀ V _{os(B)} /V _{is(A)} =-50dB | 10 | 3.0 | | MHz | |
| | Control and Out | | R _i =1kΩ, R _L =10kΩ, CONTROL/INHIBIT tr=tf=20ns | 10 | 30 | | mV | |

MEASUREMENT CIRCUITS


1. Noise Margin

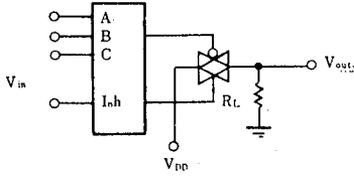


2. Propagation Delay

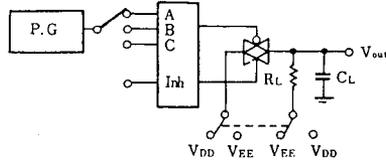


3. Feedthrough

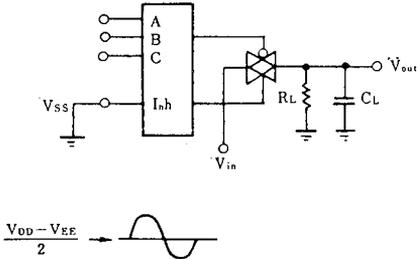

4. Crosstalk (Switch A and B)

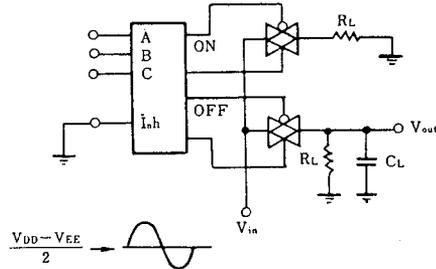

5. Crosstalk (Control and Out)

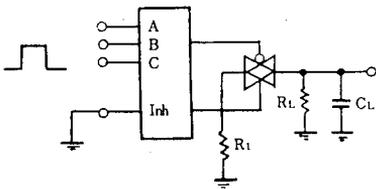

MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multiplexer Switch ICs](#) category:

Click to view products by [Nisshinbo](#) manufacturer:

Other Similar products are found below :

[NLV74HC4066ADR2G](#) [HEF4051BP](#) [MC74HC4067ADTG](#) [DG508AAK/883B](#) [NLV14051BDG](#) [016400E](#) [PI3V512QE](#) [7705201EC](#)
[PI2SSD3212NCE](#) [NLAS3257CMX2TCG](#) [PI5A3157BC6EX](#) [PI3DBS12412AZLEX](#) [PI3V512QEX](#) [PI3DBS16213ZLEX](#) [PI3DBS16415ZHEX](#)
[PS509LEX](#) [MUX36S16IRSNR](#) [74LVC1G3157GM-Q10X](#) [TC7W53FK,LF](#) [CD4053BM96](#) [TC4066BP-NF](#) [HEF4053BT.653](#) [PI3L720ZHEX](#)
[ADG5408BRUZ-REEL7](#) [ADG1404YRUZ-REEL7](#) [ADG1208YRZ-REEL7](#) [MAX4704EUB+T](#) [ADG1406BRUZ-REEL7](#) [CD4053BPWRG4](#)
[ADG658TRUZ-EP](#) [74HC4053D.653](#) [74HCT4052PW.118](#) [74LVC2G53DP.125](#) [74HC4052DB.112](#) [74HC4052PW.112](#) [74HC4053DB.112](#)
[74HC4067DB.112](#) [74HC4351DB.112](#) [74HCT4052D.112](#) [74HCT4052DB.112](#) [74HCT4053DB.112](#) [74HCT4351D.112](#) [74LV4051PW.112](#)
[FSA1256L8X_F113](#) [PI5V330QE](#) [PI5V331QE](#) [5962-8771601EA](#) [5962-87716022A](#) [ADG5249FBRUZ](#) [ADG1439BRUZ](#)