

## Ultra Low Power sub 1GHz Multichannels Radio Transceiver with USB interface

The **RC-CC1310-USB-XXX** module is based on Texas Instruments CC1310F128 component. This device combines a flexible, very low power RF transceiver with a powerful 48 MHz Cortex M3 microcontroller in a platform supporting multiple physical layers and RF standard.

In addition the transceiver is connected to a single chip CP2102 (Silicon Labs), to allow the USB to UART data transfer.



Module Information :

	<i>Frequency</i>
<b>RC-CC1310 - USB - XXX</b>	<b>868=868MHz</b>
	<b>915=915MHz</b>

**Long range operations**, the sensitivity parameter is -110dBm at data rates of 50 kbps and down to -124dBm when the data rate is 0.625kbps.

Interference from other wireless communications can be overcome with 90dB of blocking.

The RF output power levels can reach up to +14dBm.

All this ensure a robust signaling for long range communications.

**SimpleLink-Easylink** compatibility, ultra-low power platform designed (from TI) to easily implement the long-range connectivity with low power consumption on the Internet of Things projects (IoT).

**TI-15.4 Stack**, IEEE802.15.4e/g Standard Based Star Networking Software Designed for long range & robust star networks


**6LoWPAN** compatibility with mesh network stack for **Contiki**.

### Applications :

- Low-Power Wireless Systems
- Smart Grid and Automatic Meter Reading
- Home and Building Automation
- Wireless Sensor Network
- 6LoWPAN systems

### Feature :

- IEEE 802.15.4g mode switch support
- Ultra Low consumption technology
- Powerful ARM Cortex M3
- Supported by the open platform Contiki 6LoWPAN.
- Very Small size

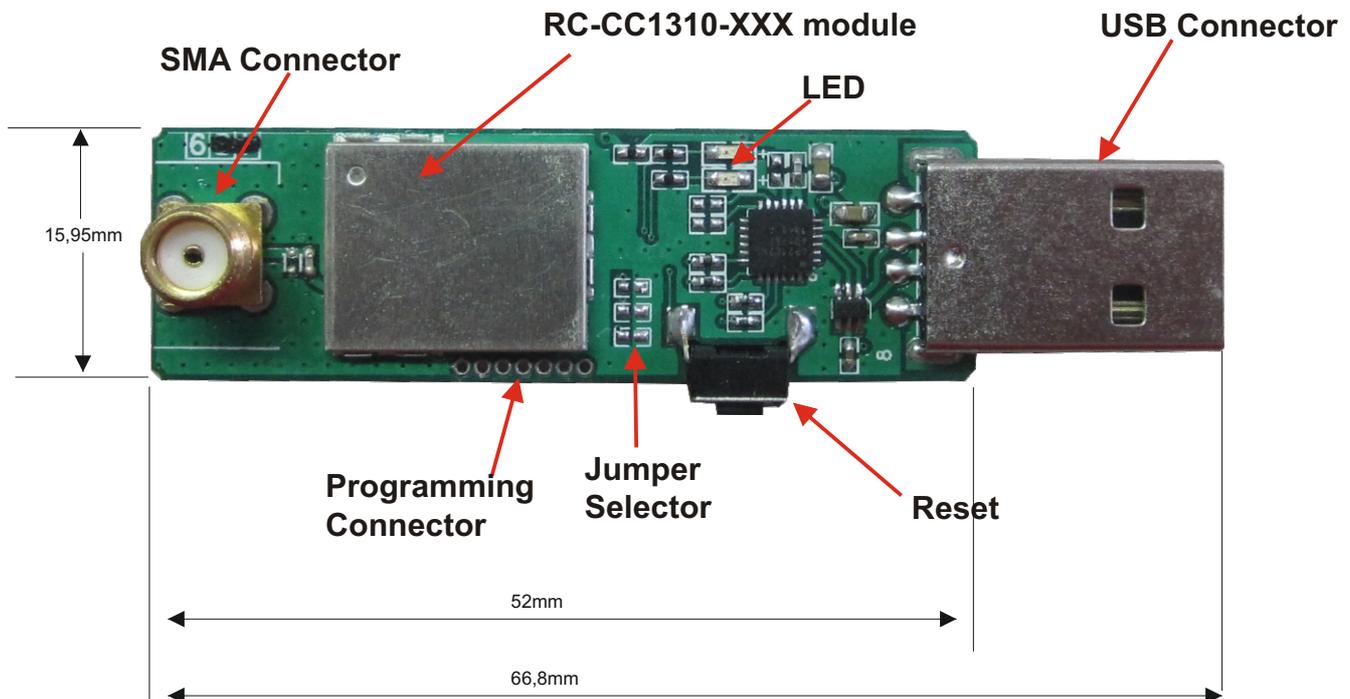

## Technical Characteristics

Characteristics	MIN	TYP	MAX	UNIT
Supply Voltage	1.8	3	3.8	VDC
Supply Current RX mode		5.5		mA
Supply Current TX mode ---> +10dBm		13.4		mA
Supply Current TX mode ---> +14dBm		23.5		mA
Supply Current Standby Mode		0.7		µA
Supply Current Shut Down Mode		185		nA
Operative Frequency		868/915		MHz
Frequency error		± 10		ppm
RF Power Output 50ohm (*)	-10		+14	dBm
RF Sensitivity 50kbps		- 110		dBm
RF Sensitivity long range mode 625bps		- 124		
Data Rate (*)	0,01		4	Mbit/s
Operative Temperature	-30		+75	°C

(\*) Programmable parameter.

### MICROCONTROLLER:



- Power ARM Cortex - M3
- Up to 48MHz Clock Speed
- 128KB of On-System Programming Flash
- 8KB of SRAM for Cache (or as General-Purpose RAM)
- 20KB of Ultralow Leakage SRAM
- Support Over-the-Air Upgrade (OTA)

### USB Interface :

- Single Chip CP2102 (Silicon Labs)

For more information and details, please refer to the CC1310 Texas Instruments datasheet.

## Reference Schematics

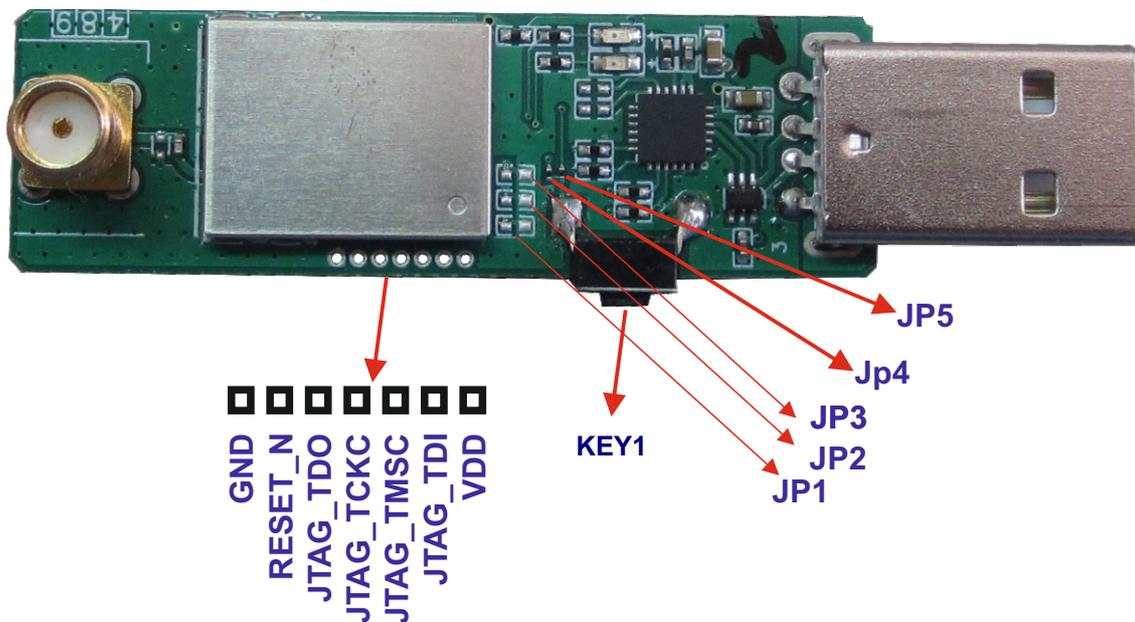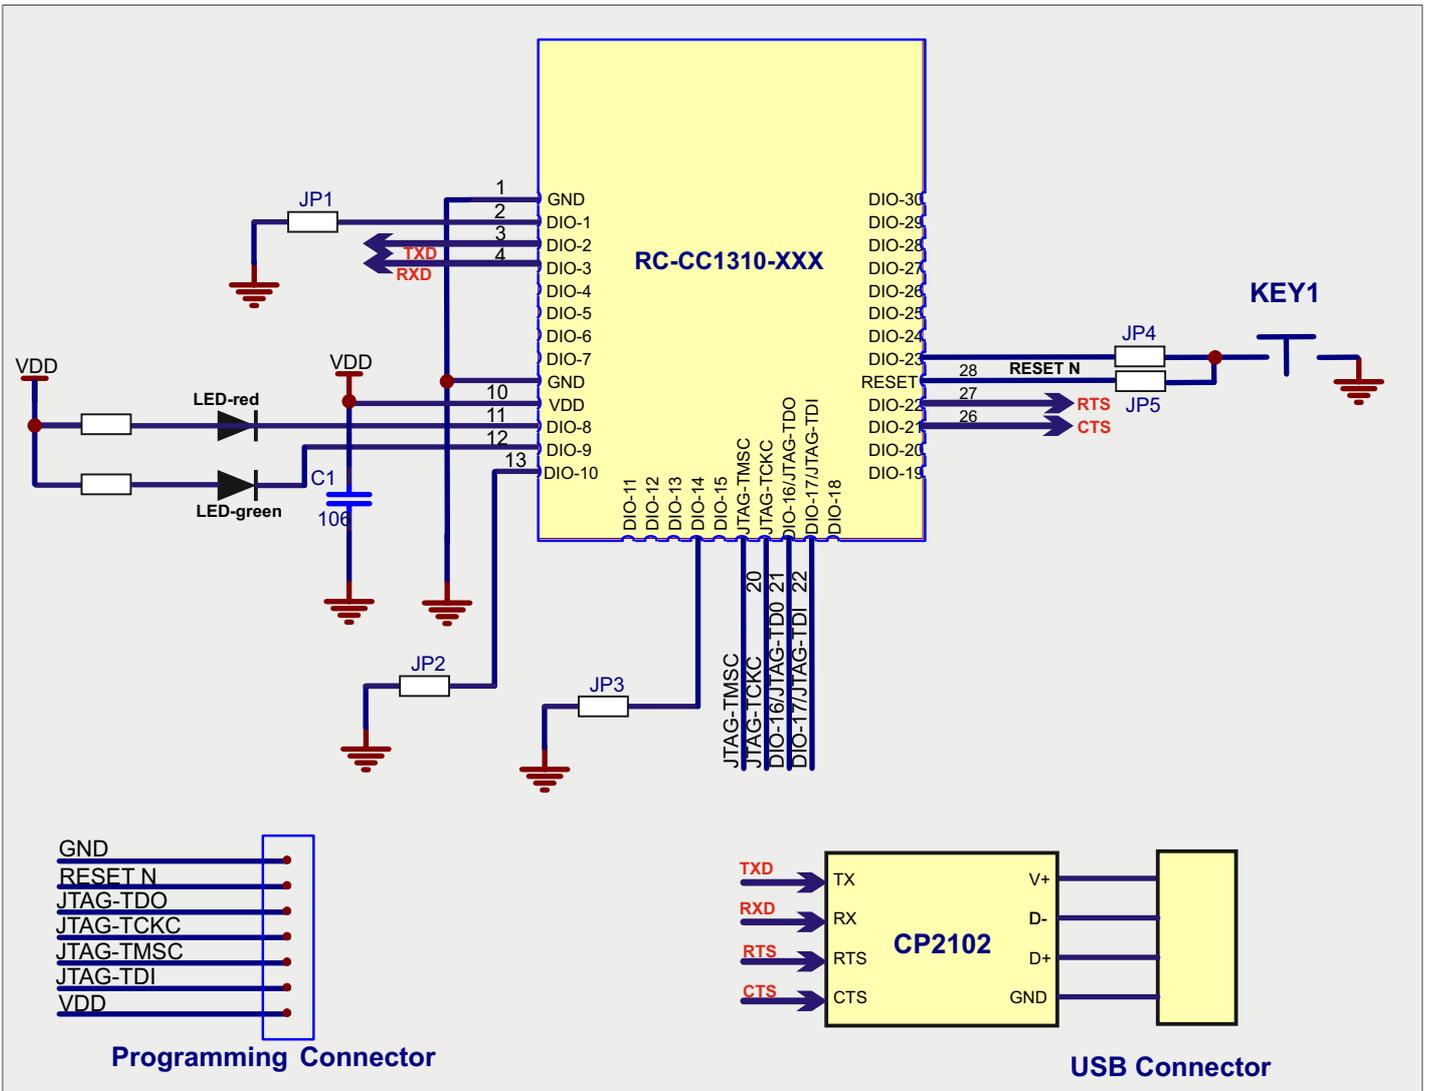

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Modules](#) category:*

*Click to view products by [Radiocontrolli](#) manufacturer:*

Other Similar products are found below :

[SIMSA868-PRO](#) [SIMSA915C-PRO](#) [SIMSA868C-PRO](#) [SIMSA433C-PRO](#) [SIMSA915-PRO](#) [AM-RX12A-433P](#) [SIMSA868C-N-PRO](#)  
[SIMSA433C-N-PRO](#) [SIMSA915C-N-PRO](#) [2221706-1](#) [S2-10716-Z1W4E](#) [G510-Q50-50-00](#) [RFID IND LED MIF SLOT](#) [650200808G](#)  
[650201421G](#) [RC-SPIRIT2-433](#) [RC-SPIRIT2-868](#) [DL-RFM69HC-433M](#) [DL-RFM69HC-868M](#) [650201508G](#) [H330 A30-00](#) [RC-CC1101-SPI-](#)  
[868](#) [RC-CC1101-SPI-SMT-434](#) [RC-CC1101-SPI-SMT-868](#) [RC-CC1310-868](#) [RCQ2-434](#) [RCS1K-868](#) [RCTX-434](#) [RCTX-434-L](#) [CTU-D2R](#)  
[CTU-D5N](#) [RFM02 868D](#) [RFM02 868S2](#) [RFM110-433S1](#) [RFM119S-433S1](#) [RFM119W-433S1](#) [RFM12B-868DP](#) [RFM210LCF-433S1](#)  
[RFM219SW-868S1](#) [RFM23B-868-D](#) [RFM31B-433-S2](#) [RFM42B-868-D](#) [RFM98PW-433S2](#) [RFM98W-433S2](#) [CX-SMA174MMCX-219](#) [HM-](#)  
[T433](#) [I2M-005](#) [650200819G](#) [650200847G](#) [650200997G](#)