


RPX-4.0-EVM-1

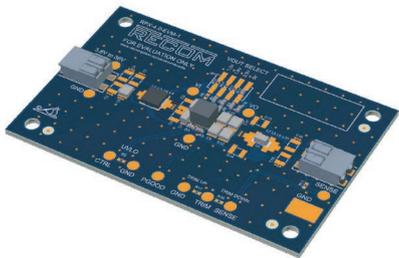

Features

Evaluation Module

- Evaluation platform for RPX-4.0 buck regulator module
- Thermal design considerations included
- EMI class B filter
- Easy evaluation of output voltage selection, control, and sensing functions

Description

The RPX-4.0-EVM-1 generates a constant output voltage selectable from 1.0VDC to 7VDC from a DC input in the range of 4 – 36VDC. It has a maximum continuous output current of 4.0A.

All the functions of the RPX-4.0 such as output voltage selection, control, power good, trim, and output sense can be readily evaluated. The behavior in overload or over-temperature can be evaluated easily before the module is designed in.

The evaluation board also contains the filter components to meet EMC class B levels. Alternate component positions are included to allow experimentation to optimize the EMC performance depending on operating conditions and budget.

Selection Guide

| Part Number | Input Voltage Range [VDC] | Output Voltage ⁽¹⁾ [VDC] | Output Current max. [A] |
|---------------|---------------------------|-------------------------------------|-------------------------|
| RPX-4.0-EVM-1 | 4 - 36 | 1.0, 1.8, 3.3, 5 | 4.0 |

Notes:

Note1: refer to [SAFE OPERATING AREA](#) of RPX-4.0 datasheet

Quick Start Guide

1. Connect P₁ to power supply (observe correct polarity)
2. Connect P₂ to the load (no load operation is allowed. For 5V_{OUT}, please refer to safe operating area in the RPX-4.0 datasheet)
3. The evaluation module is preset to 5V_{OUT}.
The output voltage can be selected for values of 1.0VDC, 1.8VDC, 3.3VDC, and 5VDC by shorting a 0Ω resistor to the respective places as seen in the board silkscreen. Please refer to safe operating area in the [RPX-4.0](#) module datasheet.
4. UVLO (Undervoltage Lockout) circuitry implements internal UVLO on the V_{IN} pin. The device is disabled when the internal voltage is under 3.55VDC(typ.). When a higher UVLO threshold is required, assemble resistor R₂. Refer to the [RPX-4.0](#) module datasheet for R₂ values.
5. CTRL
The device is preset as normally on. It can be disabled by pulling the CTRL pin to GND. Short R₂ to disable the device.




Caution:

ESD sensitive. Always follow ESD preventative procedures when handling the product!

Specifications (measured @ Ta= 25°C, full load and after warm-up unless otherwise stated)

Component Placement

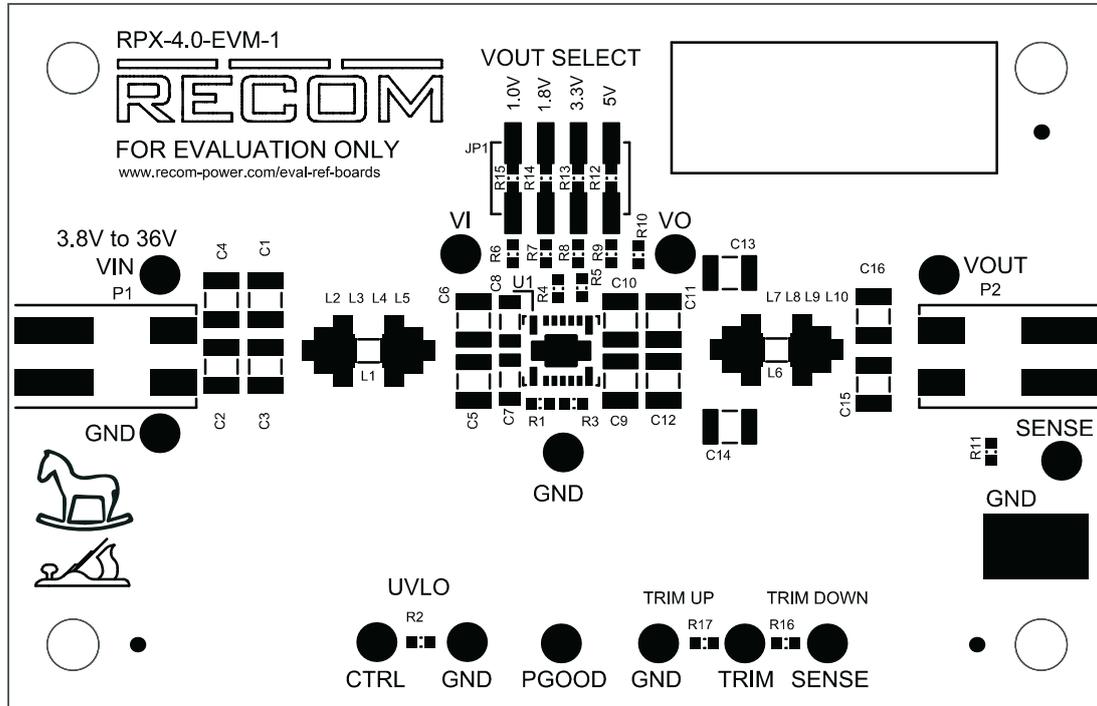

Connector Description

P1

| Pin | Name | Description |
|-----|------|--|
| 1 | VIN | Positive Input Voltage (observe correct polarity!) |
| 2 | GND | Common GND |

P2


| Pin | Name | Description |
|-----|------|-------------------------|
| 1 | GND | Common GND |
| 2 | VOUT | Positive Output Voltage |

Pads Direct Connection

| Pin | Name | Description |
|------|-------|---|
| 1 | VIN | Positive Input Voltage |
| 2 | GND | Negative Input Voltage (GND) |
| 3 | CTRL | CTRL Pad (leave open if not used) or UVLO setting |
| 4 | GND | Negative Input Voltage (GND) |
| 5 | PGOOD | Power Good Signal |
| 6 | GND | Negative Input Voltage (GND) |
| 7 | TRIM | TRIM Pad (leave open if not used) |
| 8, 9 | SENSE | Output Voltage Sense Pin (leave open if not used) |
| 10 | VOUT | Positive Output Voltage |
| 11 | GND | Negative Output Voltage (GND) |

Specifications (measured @ Ta= 25°C, full load and after warm-up unless otherwise stated)

Schematic

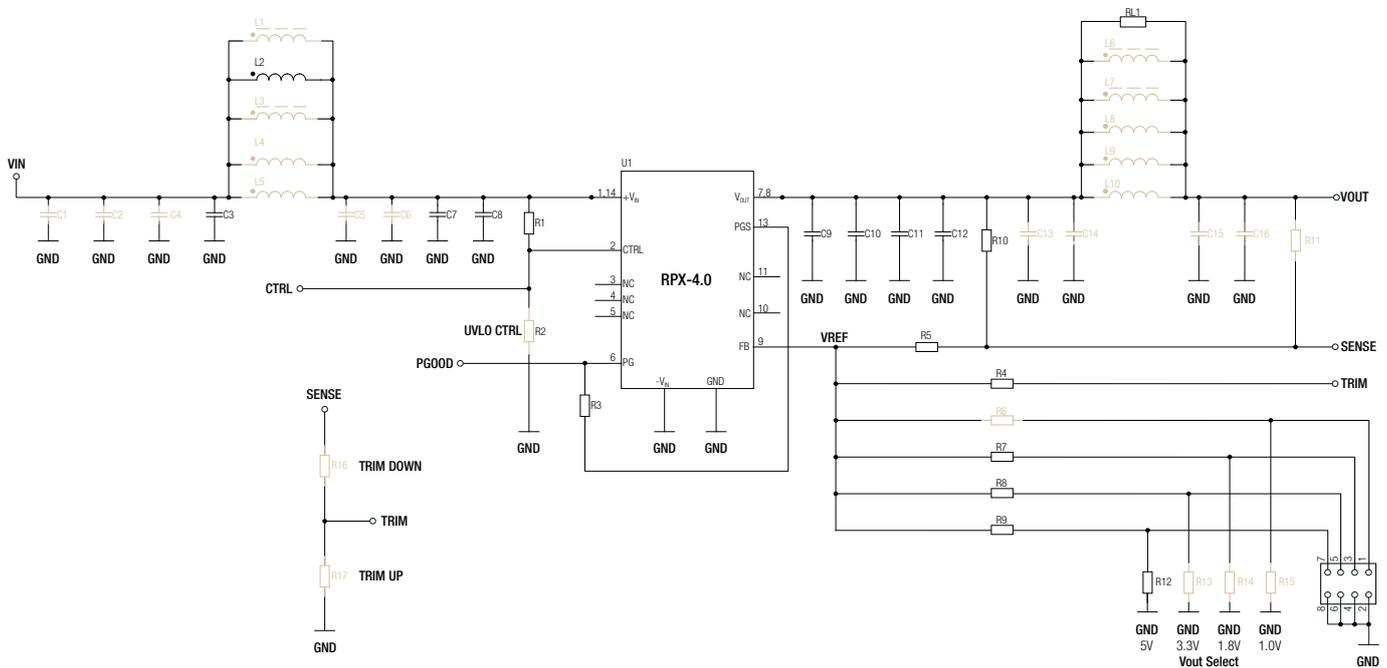

Notes:

Note2: Grey colored components are not mounted

Description

U₁: RPX-4.0 power module.

C₁, C₂, C₃, C₄, L₁, L₂, L₃, L₄, L₅, C₅, C₆, C₇, C₈: allow placement of various sized components to test input filter design. The populated filter is designed to meet EN55022 class B.

C₉, C₁₀, C₁₁, C₁₂, C₁₃, C₁₄, L₆, L₇, L₈, L₉, L₁₀, C₁₅, C₁₆, RL₂: allow placement of various sized components to test output filter design. The populated filter is designed to meet EN55022 class B.

R₁, R₂: configure CTRL and UVLO. R₁ is populated to enable the RPX-4.0. Short R₂ in order to disable the RPX-4.0 or populate R₂ in order to set UVLO threshold. Refer to **“UNDERVOLTAGE LOCKOUT”**

R₁₀: populated zero ohm resistor for direct output voltage measurement. If sense is desired at a different location, for example after the filter or directly at the load), unsolder R₁₀, and connect sense to the new measurement point.

R₁₁: sense point for output voltage after the filter. To set sense point here, remove R₁₀, and solder a zero ohm resistor at R₁₁.

V_{OUT} Selection: the output voltage can be selected with values of 1VDC, 1.8VDC, 3.3VDC, and 5VDC by shorting a zero ohm resistor to the respective places as seen in the board silkscreen. Instead of R₁₂-R₁₅ resistors, the JP₁ (SMT 2-row pin header) can be assembled and output voltage can be quickly set with jumper. Remove any resistor from positions R₁₂-R₁₅ before installing SMT header JP₁.

R₁₆, R₁₇: trim the output voltage. Refer to **“OUTPUT VOLTAGE TRIMMING”**

Specifications (measured @ Ta= 25°C, full load and after warm-up unless otherwise stated)

OUTPUT VOLTAGE TRIMMING

The RPX-4.0-EVM-1 offers the feature of trimming the output voltage in range 1.0VDC to 7VDC by using external trim resistors. The recommended value of R_{FB1} is 10kΩ, so margin of trimming down is limited. The values for trim resistors are shown in trim tables below according to E96 values; therefore, the specified voltage may slightly vary. Refer to “*Selection Guide*” for applicable V_{OUT} range.



Calculation:

V_{out_nom} = nominal output voltage [VDC]

V_{out_set} = trimmed output voltage [VDC]

R_{up} = trim up resistor [kΩ]

R_{down} = trim down resistor [kΩ]

R_{FB1}, R_{FB2} = feedback resistors [kΩ]

$$R_{up} = \frac{R_{FB1} + (V_{out_{nom}} - V_{out_{set}})}{(V_{out_{set}} - V_{out_{nom}})}$$

$$R_{down} = \frac{R_{FB1}^2 + R_{FB2} \times (R_{FB1} + 1) \times (V_{out_{set}} - V_{out_{nom}})}{R_{FB2} \times (V_{out_{nom}} - V_{out_{set}})}$$

| V _{out_nom} | R _{FB1} [kΩ] | R _{FB2} [kΩ] |
|----------------------|-----------------------|-----------------------|
| 1.0VDC | 10k | - (open) |
| 1.8VDC | 10k | 12k4 |
| 3.3VDC | 10k | 4k32 |
| 5.0VDC | 10k | 2k49 |

Practical Example RPX-4.0, trim up:

V_{out_nom}=3.3VDC, V_{out_set}=3.6VDC

$$R_{up} = \frac{10 + (3.3 - 3.6)}{(3.6 - 3.3)} = \underline{\underline{32.3k\Omega}}$$

R_{up} according to E96 ≈ 32.4kΩ

Practical Example RPX-4.0, trim down:

V_{out_nom}=3.3VDC, V_{out_set}=3.1VDC

$$R_{down} = \frac{10^2 + 4.32 \times (10 + 1) \times (3.1 - 3.3)}{4.32 \times (3.3 - 3.1)} = \underline{\underline{104.740k\Omega}}$$

R_{down} according to E96 ≈ 105kΩ

V_{out_set} = 1.8VDC

Trim up

| | | | | | | | |
|-------------------------|------|------|------|------|------|------|-------|
| V _{out_set} = | 1.85 | 1.90 | 2.0 | 2.1 | 2.3 | 2.5 | [VDC] |
| R _{up} (E96) ≈ | 200k | 100k | 48k7 | 32k4 | 19k1 | 13k3 | [Ω] |

Trim down

| | | | | |
|---------------------------|------|------|------|-------|
| V _{out_set} = | 1.75 | 1.72 | 1.7 | [VDC] |
| R _{down} (E96) ≈ | 150k | 88k7 | 69k8 | [Ω] |

V_{out_set} = 3.3VDC

Trim up

| | | | | | | | |
|-------------------------|------|------|------|------|------|-----|-------|
| V _{out_set} = | 3.4 | 3.5 | 3.6 | 3.8 | 4.0 | 4.2 | [VDC] |
| R _{up} (E96) ≈ | 100k | 48k7 | 32k4 | 19k1 | 13k3 | 10k | [Ω] |

Trim down

| | | | | |
|---------------------------|------|------|------|-------|
| V _{out_set} = | 3.2 | 3.1 | 3.0 | [VDC] |
| R _{down} (E96) ≈ | 221k | 105k | 66k5 | [Ω] |

V_{out_set} = 5VDC

Trim up

| | | | | | | | | |
|-------------------------|------|-----|------|------|------|------|------|-------|
| V _{out_set} = | 5.1 | 5.2 | 5.3 | 5.5 | 6.0 | 6.5 | 7.0 | [VDC] |
| R _{up} (E96) ≈ | 100k | 48k | 32k4 | 19k1 | 9k09 | 5k62 | 4k02 | [Ω] |

Trim down

| | | | | | |
|---------------------------|------|------|------|------|-------|
| V _{out_set} = | 4.9 | 4.8 | 4.7 | 4.5 | [VDC] |
| R _{down} (E96) ≈ | 392k | 191k | 124k | 69k8 | [Ω] |

UNDERVOLTAGE LOCKOUT

The RPX-4.0-EVM-1 offers the feature of setting UVLO threshold. The values for UVLO resistor value are shown in UVLO table below according to E96 values; therefore, the specified voltage may slightly vary.


| | | | | | | | |
|--------------------------------|------|------|------|------|------|------|-------|
| V _{in} UVLO threshold | 6.5 | 10 | 15 | 20 | 25 | 30 | [VDC] |
| R ₂ (E96) ≈ | 23k7 | 14k3 | 9k09 | 6k65 | 5k23 | 4k32 | [Ω] |

Specifications (measured @ Ta= 25°C, full load and after warm-up unless otherwise stated)

DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|------|---------------------|
| Dimension (LxWxH) | | 85.0 x 55.0 x 6.5mm |
| Weight | | 21g typ. |

Layout

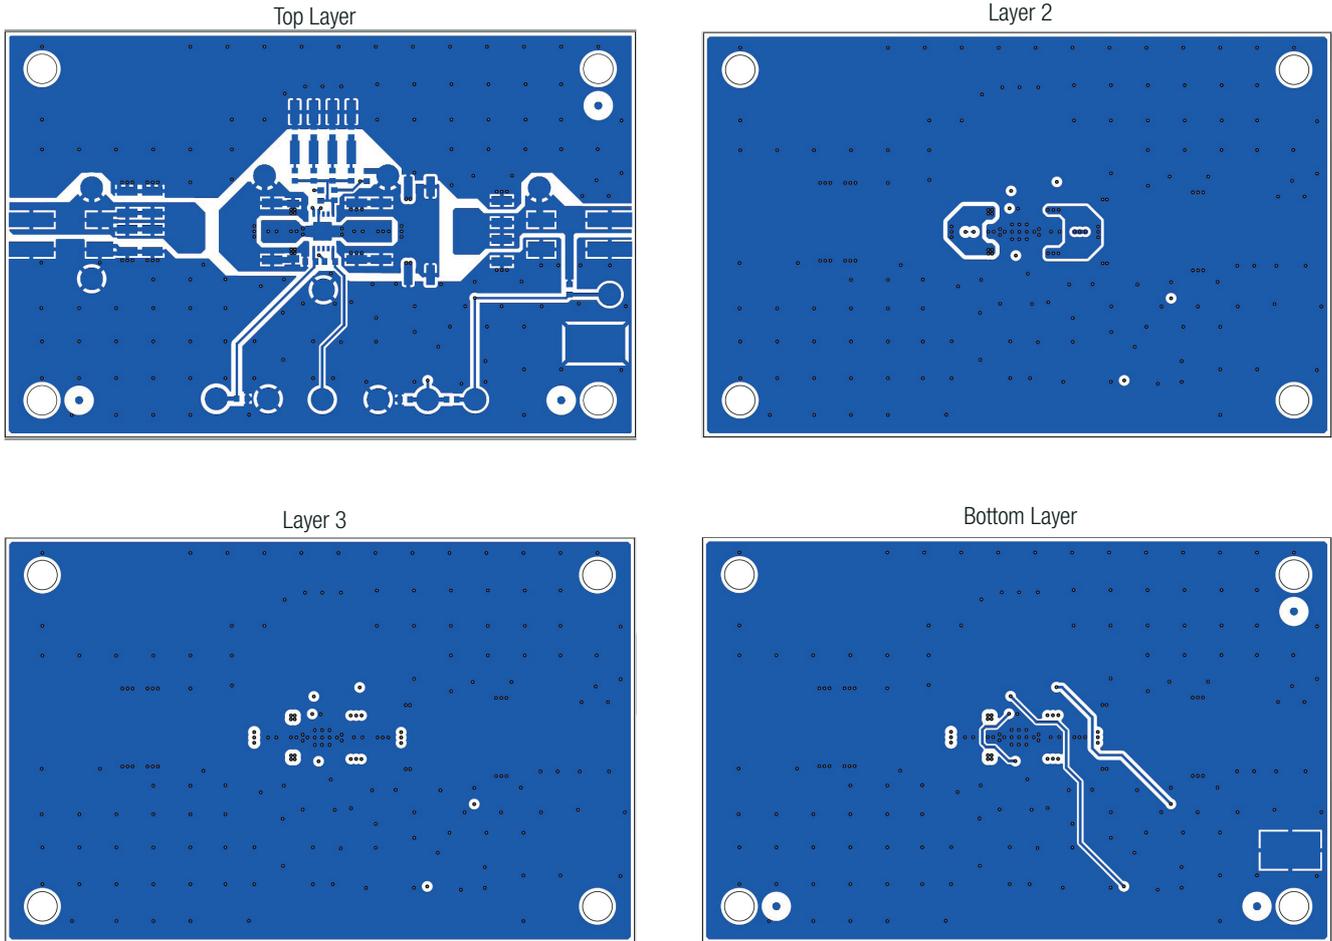

Notes:

Note3: Visit www.recom-power.com/eval-ref-boards to download the Gerber files

BOM

| Comp. | Description | Manufacturer Part Number | Manufacturer | Remarks |
|--|--------------------------|--------------------------|---------------------------|-------------|
| C1, C2, C4, C5, C6, C13, C14, C15, C16 | CAP 1210 | | | not mounted |
| C3, C7, C8 | 10uF 50V X7R 1206 | CL32B106KBJNNNE | Samsung Electro-Mechanics | |
| C9, C10 | 47uF 10V X7R 1210 | GRM32ER71A476KE15L | MURATA | |
| C11, C12 | 22uF 25V X7R 1210 | CL32B226KAJNFNE | Samsung Electro-Mechanics | |
| L1, L3, L4, L5, L6, L7, L8, L9, L10 | FERRITE BEAD | | | not mounted |
| L2 | IND 2.2uH 5.8A 29mΩ 0530 | 0530CDMCCDS-2R2MC | SUMIDA | |

continued on next page

Specifications (measured @ Ta= 25°C, full load and after warm-up unless otherwise stated)

| Comp. | Description | Manufacturer Part Number | Manufacturer | Remarks |
|--------------------------------------|--------------------------|--------------------------|--------------|-------------|
| P1, P2 | CONNECTOR | 2060-452_998-404 | WAGO | |
| JP1 | PIN HEADER | | | not mounted |
| R1, R3 | 100k Ω 0.1W 0603 | RC0603FR-07100KL | YAGEO | |
| R2, R6, R11, R13, R14, R15, R16, R17 | RES 0603 | | | not mounted |
| R4 | 1k Ω 0.1W 0603 | RC0603FR-071KL | YAGEO | |
| R5 | 10k Ω 0.1W 0603 | RC0603FR-0710KL | YAGEO | |
| R7 | 12.4k Ω 0.1W 0603 | RC0603FR-0712K4L | YAGEO | |
| R8 | 4.32k Ω 0.1W 0603 | RC0603FR-074K32L | YAGEO | |
| R9 | 2.49k Ω 0.1W 0603 | RC0603FR-072K49L | YAGEO | |
| R10, R12 | 0 Ω 0.1W 0603 | RC0603JR-070RL | YAGEO | |
| RL1 | 0 Ω 0.25W 1206 | CRCW12060000Z0EAC | VISHAY | |
| U1 | RPX-4.0 MODULE | RPX-4.0 | RECOM | |

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|------|-----------------------|
| Packaging Dimension (LxWxH) | | 114.0 x 60.0 x 28.0mm |
| Packaging Quantity | | 1pc |

Contents

- RPX-4.0-EVM-1 Evaluation Module
- Terms and Conditions

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [RECOM POWER](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ27411EVM-G1A](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [ADM7170CP-EVALZ](#) [ADP163UJ-EVALZ](#)