


Schottky Barrier Diode

FEATURES

- Extremely low V_F .
- Low stored charge, majority carrier conduction
- Low power loss/high efficient.
- MSL 1.



Lead-free

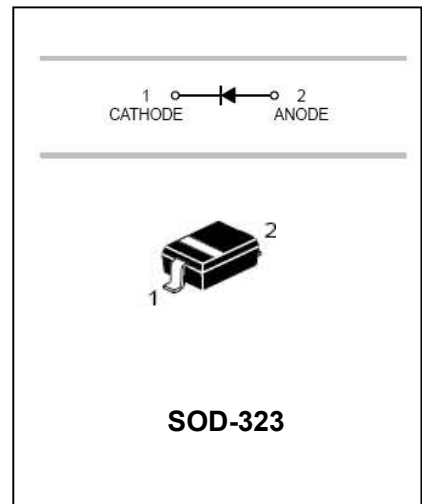

APPLICATIONS

- For Use In Low Voltage, High Frequency Inverters.
- Free Wheeling, And Polarity Protection Applications.

ORDERING INFORMATION

Type No.	Marking	Package Code
B5818WSX	SK	SOD-323
B5819WSX	SL	SOD-323

MAXIMUM RATING @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	symbol	B5818WSX	B5819WSX	Unit
Non-Repetitive Peak reverse voltage	V_{RM}	30	40	V
Peak repetitive Peak reverse voltage Working Peak Reverse voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_R	30	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	21	28	V
Average Rectified output Current	I_o	1		A
Peak forward surge current@=8.3ms	I_{FSM}	9		A
Power Dissipation	P_d	250		mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500		$^{\circ}\text{C}/\text{mW}$
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +125		$^{\circ}\text{C}$

Schottky Barrier Diode

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified



Parameter	Symbol	Test Condition	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)}$	$I_R=1mA$ B5818WSX B5819WSX	30 40		V
Reverse voltage leakage current	I_R	$V_R=30V$ $V_R=40V$ B5818WSX B5819WSX		1	mA
Forward voltage	V_F	B5818WSX $I_F=1A$ $I_F=3A$		0.55 0.875	V
		B5819WSX $I_F=1A$ $I_F=3A$		0.6 0.9	V
Diode capacitance	C_D	$V_R=4V, f=1MHz$		120	pF

Schottky Barrier Diode

PACKAGE OUTLINE

Plastic surface mounted package

SOD-323

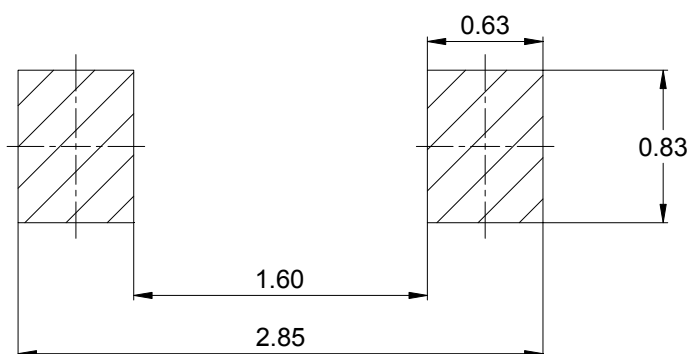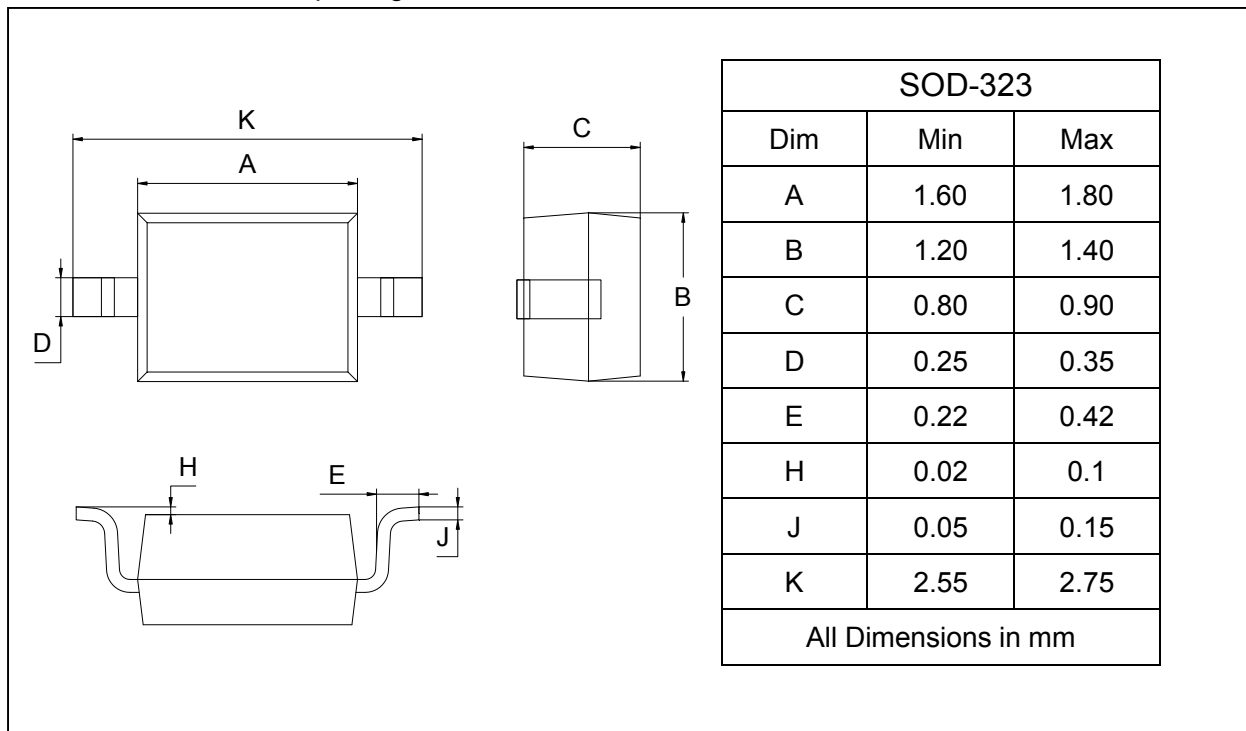

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
B5818WSX-B5819WSX	SOD-323	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Shenzhen JingYang](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#)
[NRVBAF360T3G](#) [NSR05F40QNX5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(Te85L,QM](#) [MBRA140TRPBF](#)
[MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [SDM8M100P5-13](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#)
[PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [BAS 70-07 E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#)
[HSM190Je3/TR13](#) [B330AF-13](#) [ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#)