

EFR32MG21 Multiprotocol Wireless SoC Family Data Sheet



The EFR32MG21 SoC is part of the Wireless Gecko portfolio. EFR32MG21 SoCs are ideal for enabling energy-friendly multiprotocol, multiband networking for IoT devices.


The single-die solution combines an 80 MHz ARM Cortex-M33, a high performance 2.4 GHz radio, and an integrated Hardware Secure Engine to provide a highly secure, energy efficient wireless SoC for IoT connected applications.

EFR32MG21 applications include:

- IoT Multi-Protocol Devices
- Lighting
- Connected Home
- Gateways and Digital Assistants
- Building Automation and Security

KEY FEATURES

- 32-bit ARM® Cortex®-M33 core with 80 MHz maximum operating frequency
- Up to 1024 kB of flash and 96 kB of RAM
- 12-channel Peripheral Reflex System enabling autonomous interaction of MCU peripherals
- Integrated PA with up to 20 dBm (2.4 GHz) TX power
- Robust peripheral set and up to 20 GPIO in a 4x4 QFN package

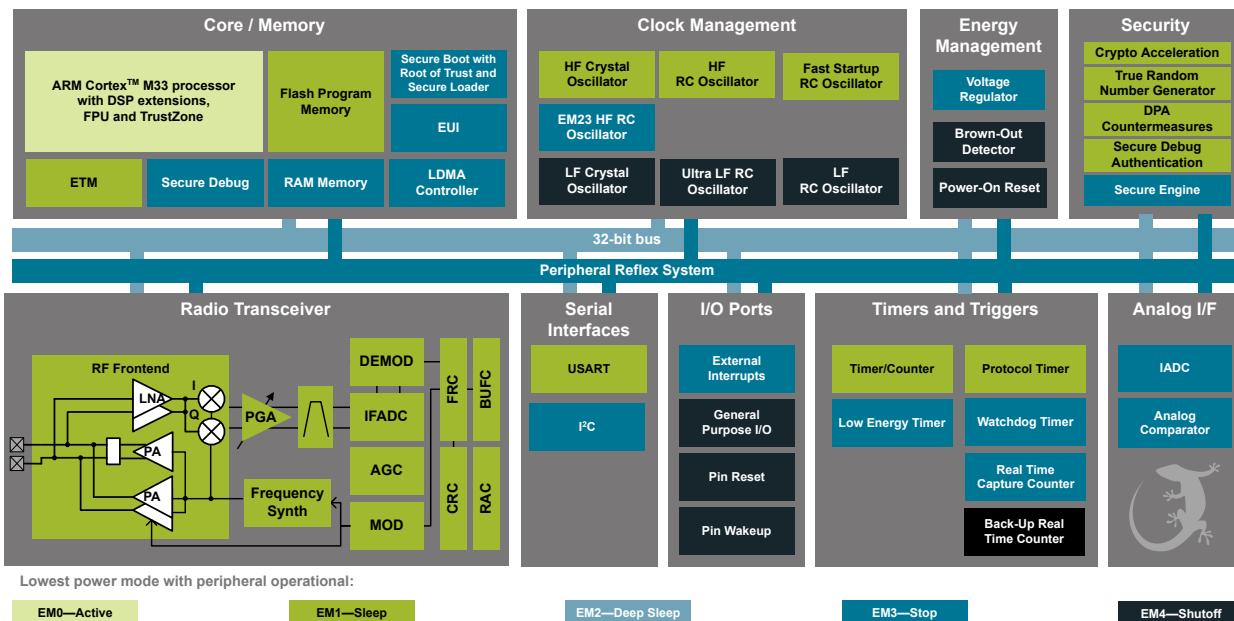

1. Feature List

The EFR32MG21 highlighted features are listed below.

- **Low Power Wireless System-on-Chip**

- High Performance 32-bit 80 MHz ARM Cortex®-M33 with DSP instruction and floating-point unit for efficient signal processing
- Up to 1024 kB flash program memory
- Up to 96 kB RAM data memory
- 2.4 GHz radio operation
- TX power up to 20 dBm

- **Low Energy Consumption**

- 8.8 mA RX current at 2.4 GHz (1 Mbps GFSK)
- 9.4 mA RX current at 2.4 GHz (250 kbps O-QPSK DSSS)
- 9.9 mA TX current @ 0 dBm output power at 2.4 GHz
- 34.9 mA TX current @ 10 dBm output power at 2.4 GHz
- 50.9 μ A/MHz in Active Mode (EM0)
- 5.0 μ A EM2 DeepSleep current
(96 kB RAM retention and RTC running from LFXO)
- 4.5 μ A EM2 DeepSleep current
(16 kB RAM retention and RTC running from LFRCO)

- **High Receiver Performance**

- -104.3 dBm sensitivity @ 250 kbps O-QPSK DSSS
- -97.1 dBm sensitivity @ 1 Mbit/s GFSK
- -94 dBm sensitivity @ 2 Mbit/s GFSK
- -105 dBm sensitivity @ 125 kbps GFSK

- **Supported Modulation Formats**

- GFSK
- OQPSK

- **Protocol Support**

- Bluetooth Low Energy (Bluetooth 5)
- Zigbee
- Thread

- **Wide selection of MCU peripherals**

- 12-bit 1 Msps SAR Analog to Digital Converter (ADC)
- 2 × Analog Comparator (ACMP)
- Up to 20 General Purpose I/O pins with output state retention and asynchronous interrupts
- 8 Channel DMA Controller
- 12 Channel Peripheral Reflex System (PRS)
- 3 × 16-bit Timer/Counter
 - 3 Compare/Capture/PWM channels
- 1 × 32-bit Timer/Counter
 - 3 Compare/Capture/PWM channels
- 32-bit Real Time Counter
- 24-bit Low Energy Timer for waveform generation
- 2 × Watchdog Timer
- 3 × Universal Synchronous/Asynchronous Receiver/Transmitter (UART/SPI/SmartCard(ISO 7816)/IrDA/I²S)
- 2 × I²C interface with SMBus support

- **Wide Operating Range**

- 1.71 V to 3.8 V single power supply
- -40°C to 125°C ambient

- **Secure Vault**

- Hardware Cryptographic Acceleration for AES128/192/256, ChaCha20-Poly1305, SHA-1, SHA-2/256/384/512, ECDSA +ECDH(P-192, P-256, P-384, P-521), Ed25519 and Curve25519, J-PAKE, PBKDF2
- True Random Number Generator (TRNG)
- ARM® TrustZone®
- Secure Boot (Root of Trust Secure Loader)
- Secure Debug Unlock
- DPA Countermeasures
- Secure Key Management with PUF
- Anti-Tamper
- Secure Attestation

- **QFN32 4x4 mm Package**


- 0.4 mm pitch

2. Ordering Information

Table 2.1. Ordering Information

| Ordering Code | Max TX Power | Flash (kB) | RAM (kB) | Secure Vault | GPIO | Package |
|--------------------------|--------------|------------|----------|--------------|------|---------|
| EFR32MG21B020F768IM32-B | 20 dBm | 768 | 64 | High | 20 | QFN32 |
| EFR32MG21B020F512IM32-B | 20 dBm | 512 | 64 | High | 20 | QFN32 |
| EFR32MG21B020F1024IM32-B | 20 dBm | 1024 | 96 | High | 20 | QFN32 |
| EFR32MG21B010F768IM32-B | 10 dBm | 768 | 64 | High | 20 | QFN32 |
| EFR32MG21B010F512IM32-B | 10 dBm | 512 | 64 | High | 20 | QFN32 |
| EFR32MG21B010F1024IM32-B | 10 dBm | 1024 | 96 | High | 20 | QFN32 |
| EFR32MG21A020F768IM32-B | 20 dBm | 768 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A020F512IM32-B | 20 dBm | 512 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A020F1024IM32-B | 20 dBm | 1024 | 96 | Mid | 20 | QFN32 |
| EFR32MG21A010F768IM32-B | 10 dBm | 768 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A010F512IM32-B | 10 dBm | 512 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A010F1024IM32-B | 10 dBm | 1024 | 96 | Mid | 20 | QFN32 |
| EFR32MG21B020F768IM32-D | 20 dBm | 768 | 64 | High | 20 | QFN32 |
| EFR32MG21B020F512IM32-D | 20 dBm | 512 | 64 | High | 20 | QFN32 |
| EFR32MG21B020F1024IM32-D | 20 dBm | 1024 | 96 | High | 20 | QFN32 |
| EFR32MG21B010F768IM32-D | 10 dBm | 768 | 64 | High | 20 | QFN32 |
| EFR32MG21B010F512IM32-D | 10 dBm | 512 | 64 | High | 20 | QFN32 |
| EFR32MG21B010F1024IM32-D | 10 dBm | 1024 | 96 | High | 20 | QFN32 |
| EFR32MG21A020F768IM32-D | 20 dBm | 768 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A020F512IM32-D | 20 dBm | 512 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A020F1024IM32-D | 20 dBm | 1024 | 96 | Mid | 20 | QFN32 |
| EFR32MG21A010F768IM32-D | 10 dBm | 768 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A010F512IM32-D | 10 dBm | 512 | 64 | Mid | 20 | QFN32 |
| EFR32MG21A010F1024IM32-D | 10 dBm | 1024 | 96 | Mid | 20 | QFN32 |

Bluetooth 5.x: As the Bluetooth standard evolves, Silicon Labs is regularly adding new features. For more information on supported Bluetooth capabilities, visit <https://www.silabs.com/bluetooth-hardware>.

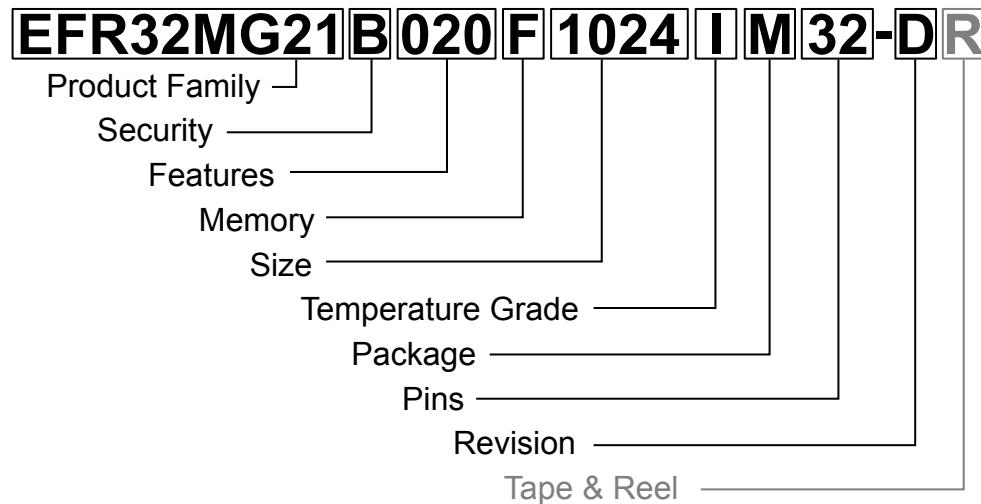

| Field | Options |
|-----------------------|--|
| Product Family | <ul style="list-style-type: none"> • EFR32MG21: Wireless Gecko MG21 Family |
| Security | <ul style="list-style-type: none"> • A: Secure Vault Mid • B: Secure Vault High |
| Features [f1][f2][f3] | <ul style="list-style-type: none"> • f1 <ul style="list-style-type: none"> • 0: Unused • f2 <ul style="list-style-type: none"> • 1: 10 dBm PA Transmit Power • 2: 20 dBm PA Transmit Power • f3 <ul style="list-style-type: none"> • 0: Unused |
| Memory | <ul style="list-style-type: none"> • F: Flash |
| Size | <ul style="list-style-type: none"> • Memory Size in kBytes |
| Temperature Grade | <ul style="list-style-type: none"> • I: -40 to +125 °C |
| Package | <ul style="list-style-type: none"> • M: QFN |
| Pins | <ul style="list-style-type: none"> • Number of Package Pins |
| Revision | <ul style="list-style-type: none"> • B: Revision B • D: Revision D |
| Tape & Reel | <ul style="list-style-type: none"> • R: Tape & Reel (optional) |

Figure 2.1. Ordering Code Key

Table of Contents

| | |
|---|----------|
| 1. Feature List | 2 |
| 2. Ordering Information | 3 |
| 3. System Overview | 8 |
| 3.1 Introduction | 8 |
| 3.2 Radio | 8 |
| 3.2.1 Antenna Interface | 8 |
| 3.2.2 Fractional-N Frequency Synthesizer | 9 |
| 3.2.3 Receiver Architecture | 9 |
| 3.2.4 Transmitter Architecture | 9 |
| 3.2.5 Packet and State Trace | 9 |
| 3.2.6 Data Buffering | 9 |
| 3.2.7 Radio Controller (RAC) | 9 |
| 3.3 General Purpose Input/Output (GPIO) | 10 |
| 3.4 Clocking | 10 |
| 3.4.1 Clock Management Unit (CMU) | 10 |
| 3.4.2 Internal and External Oscillators | 10 |
| 3.5 Counters/Timers and PWM | 10 |
| 3.5.1 Timer/Counter (TIMER) | 10 |
| 3.5.2 Low Energy Timer (LETIMER) | 10 |
| 3.5.3 Real Time Clock with Capture (RTCC) | 11 |
| 3.5.4 Back-Up Real Time Counter (BURTC) | 11 |
| 3.5.5 Watchdog Timer (WDOG) | 11 |
| 3.6 Communications and Other Digital Peripherals | 11 |
| 3.6.1 Universal Synchronous/Asynchronous Receiver/Transmitter (USART) | 11 |
| 3.6.2 Inter-Integrated Circuit Interface (I ² C) | 11 |
| 3.6.3 Peripheral Reflex System (PRS) | 11 |
| 3.7 Secure Vault Features | 12 |
| 3.7.1 Secure Boot with Root of Trust and Secure Loader (RTSL) | 12 |
| 3.7.2 Cryptographic Accelerator | 13 |
| 3.7.3 True Random Number Generator | 13 |
| 3.7.4 Secure Debug with Lock/Unlock | 13 |
| 3.7.5 DPA Countermeasures | 13 |
| 3.7.6 Secure Key Management with PUF | 13 |
| 3.7.7 Anti-Tamper | 14 |
| 3.7.8 Secure Attestation | 14 |
| 3.8 Analog | 14 |
| 3.8.1 Analog Comparator (ACMP) | 14 |
| 3.8.2 Analog to Digital Converter (IADC) | 14 |
| 3.9 Reset Management Unit (RMU) | 14 |
| 3.10 Core and Memory | 15 |
| 3.10.1 Processor Core | 15 |
| 3.10.2 Memory System Controller (MSC) | 15 |

| | |
|--|-----------|
| 3.10.3 Linked Direct Memory Access Controller (LDMA) | 15 |
| 3.11 Memory Map | 16 |
| 3.12 Configuration Summary | 16 |
| 4. Electrical Specifications | 17 |
| 4.1 Electrical Characteristics for Revision B | 17 |
| 4.1.1 Absolute Maximum Ratings | 18 |
| 4.1.2 General Operating Conditions | 19 |
| 4.1.3 Thermal Characteristics | 20 |
| 4.1.4 Current Consumption | 21 |
| 4.1.5 2.4 GHz RF Transceiver Characteristics | 26 |
| 4.1.6 Flash Characteristics | 41 |
| 4.1.7 Energy Mode Wake-up and Entry Times | 42 |
| 4.1.8 Oscillators | 43 |
| 4.1.9 GPIO Pins (3V GPIO pins) | 48 |
| 4.1.10 Analog to Digital Converter (ADC) | 50 |
| 4.1.11 Analog Comparator (ACMP) | 52 |
| 4.1.12 Temperature Sensor | 53 |
| 4.1.13 Brown Out Detectors | 54 |
| 4.1.14 USART SPI Main Timing | 56 |
| 4.1.15 USART SPI Secondary Timing | 58 |
| 4.1.16 I2C Electrical Specifications | 59 |
| 4.1.17 Boot Timing | 61 |
| 4.1.18 Crypto Operation Timing for SE Manager API | 62 |
| 4.1.19 Crypto Operation Average Current for SE Manager API | 64 |
| 4.2 Typical Performance Curves for Revision B | 66 |
| 4.2.1 Supply Current | 67 |
| 4.2.2 2.4 GHz Radio | 69 |
| 4.3 Electrical Characteristics for Revision D | 71 |
| 4.3.1 Absolute Maximum Ratings | 72 |
| 4.3.2 General Operating Conditions | 73 |
| 4.3.3 Thermal Characteristics | 74 |
| 4.3.4 Current Consumption | 75 |
| 4.3.5 2.4 GHz RF Transceiver Characteristics | 80 |
| 4.3.6 Flash Characteristics | 95 |
| 4.3.7 Energy Mode Wake-up and Entry Times | 96 |
| 4.3.8 Oscillators | 97 |
| 4.3.9 GPIO Pins (3V GPIO pins) | 102 |
| 4.3.10 Analog to Digital Converter (ADC) | 104 |
| 4.3.11 Analog Comparator (ACMP) | 106 |
| 4.3.12 Temperature Sensor | 107 |
| 4.3.13 Brown Out Detectors | 108 |
| 4.3.14 USART SPI Main Timing | 110 |
| 4.3.15 USART SPI Secondary Timing | 112 |
| 4.3.16 I2C Electrical Specifications | 113 |
| 4.3.17 Boot Timing | 115 |
| 4.3.18 Crypto Operation Timing for SE Manager API | 116 |

| | |
|--|------------|
| 4.3.19 Crypto Operation Average Current for SE Manager API | 118 |
| 4.4 Typical Performance Curves for Revision D | 120 |
| 4.4.1 Supply Current | 121 |
| 4.4.2 2.4 GHz Radio | 123 |
| 5. Typical Connection Diagrams | 126 |
| 5.1 Power | 126 |
| 5.2 RF Matching Networks | 126 |
| 5.2.1 2.4 GHz 0 dBm Matching Network | 127 |
| 5.2.2 2.4 GHz 10 dBm Matching Network | 128 |
| 5.2.3 2.4 GHz 20 dBm Matching Network | 128 |
| 5.3 Other Connections | 129 |
| 6. Pin Definitions | 130 |
| 6.1 QFN32 Device Pinout | 130 |
| 6.2 Alternate Function Table | 131 |
| 6.3 Analog Peripheral Connectivity | 132 |
| 6.4 Digital Peripheral Connectivity | 133 |
| 7. QFN32 Package Specifications | 136 |
| 7.1 QFN32 Package Dimensions | 136 |
| 7.2 QFN32 PCB Land Pattern | 138 |
| 7.3 QFN32 Package Marking | 140 |
| 8. Revision History | 141 |

3. System Overview

3.1 Introduction

The EFR32 product family combines an energy-friendly MCU with a high performance radio transceiver. The devices are well suited for secure connected IoT multiprotocol devices requiring high performance and low energy consumption. This section gives a short introduction to the full radio and MCU system. The detailed functional description can be found in the EFR32xG21 Reference Manual.

A block diagram of the EFR32MG21 family is shown in the figure below. The diagram shows a superset of features available on the family, which vary by OPN. For more information about specific device features, consult the Ordering Information table.

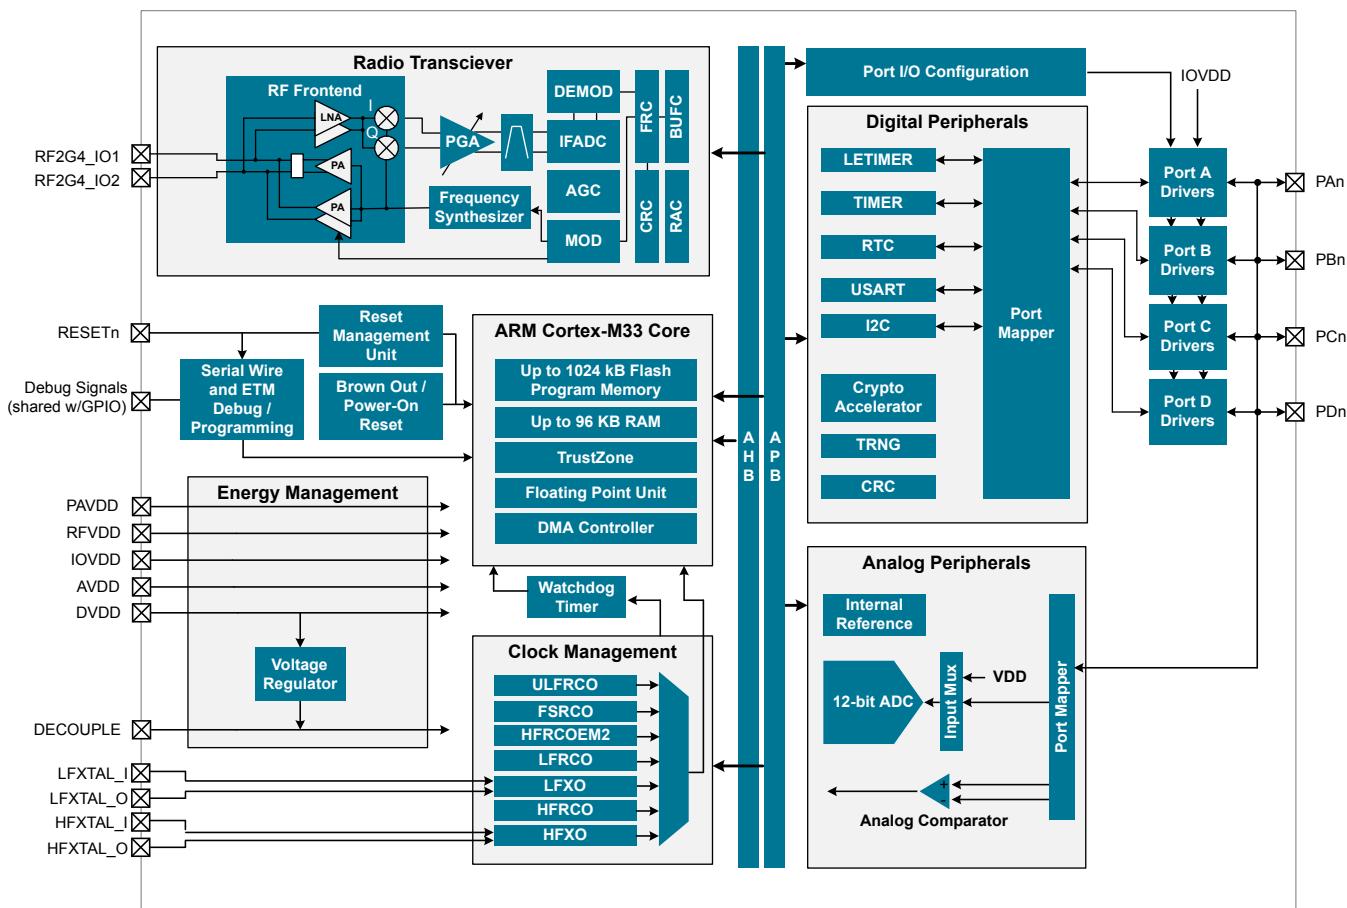


Figure 3.1. Detailed EFR32MG21 Block Diagram

3.2 Radio

The EFR32MG21 features a highly configurable radio transceiver supporting Zigbee, Thread, and Bluetooth Low Energy wireless protocols.

3.2.1 Antenna Interface

The 2.4 GHz antenna interface consists of two single-ended pins (RF2G4_IO1 and RF2G4_IO2) that interface directly to two LNAs and two 10 dBm PAs. For devices that support 20 dBm, these pins also interface to the 20 dBm on-chip balun. Integrated switches select either RF2G4_IO1 or RF2G4_IO2 to be the active path.

The external components and power supply connections for the antenna interface typical applications are shown in the RF Matching Networks section.

3.2.2 Fractional-N Frequency Synthesizer

The EFR32MG21 contains a high performance, low phase noise, fully integrated fractional-N frequency synthesizer. The synthesizer is used in receive mode to generate the LO frequency for the down-conversion mixer. It is also used in transmit mode to directly generate the modulated RF carrier.

The fractional-N architecture provides excellent phase noise performance, frequency resolution better than 100 Hz, and low energy consumption. The synthesizer's fast frequency settling allows for very short receiver and transmitter wake up times to reduce system energy consumption.

3.2.3 Receiver Architecture

The EFR32MG21 uses a low-IF receiver architecture, consisting of a Low-Noise Amplifier (LNA) followed by an I/Q down-conversion mixer. The I/Q signals are further filtered and amplified before being sampled by the IF analog-to-digital converter (IFADC).

The IF frequency is configurable from 150 kHz to 1371 kHz. The IF can further be configured for high-side or low-side injection, providing flexibility with respect to known interferers at the image frequency.

The Automatic Gain Control (AGC) module adjusts the receiver gain to optimize performance and avoid saturation for excellent selectivity and blocking performance. The 2.4 GHz radio is calibrated at production to improve image rejection performance.

Demodulation is performed in the digital domain. The demodulator performs configurable decimation and channel filtering to allow receive bandwidths ranging from 0.1 to 2530 kHz. High carrier frequency and baud rate offsets are tolerated by active estimation and compensation. Advanced features supporting high quality communication under adverse conditions include forward error correction by block and convolutional coding as well as Direct Sequence Spread Spectrum (DSSS).

A Received Signal Strength Indicator (RSSI) is available for signal quality metrics, for level-based proximity detection, and for RF channel access by Collision Avoidance (CA) or Listen Before Talk (LBT) algorithms. An RSSI capture value is associated with each received frame and the dynamic RSSI measurement can be monitored throughout reception.

3.2.4 Transmitter Architecture

The EFR32MG21 uses a direct-conversion transmitter architecture. For constant envelope modulation formats, the modulator controls phase and frequency modulation in the frequency synthesizer. Transmit symbols or chips are optionally shaped by a digital shaping filter. The shaping filter is fully configurable, including the BT product, and can be used to implement Gaussian or Raised Cosine shaping.

Carrier Sense Multiple Access - Collision Avoidance (CSMA-CA) or Listen Before Talk (LBT) algorithms can be automatically timed by the EFR32MG21. These algorithms are typically defined by regulatory standards to improve inter-operability in a given bandwidth between devices that otherwise lack synchronized RF channel access.

3.2.5 Packet and State Trace

The EFR32MG21 Frame Controller has a packet and state trace unit that provides valuable information during the development phase. It features:

- Non-intrusive trace of transmit data, receive data and state information
- Data observability on a single-pin UART data output, or on a two-pin SPI data output
- Configurable data output bitrate / baudrate
- Multiplexed transmitted data, received data and state / meta information in a single serial data stream

3.2.6 Data Buffering

The EFR32MG21 features an advanced Radio Buffer Controller (BUFC) capable of handling up to 4 buffers of adjustable size from 64 bytes to 4096 bytes. Each buffer can be used for RX, TX or both. The buffer data is located in RAM, enabling zero-copy operations.

3.2.7 Radio Controller (RAC)

The Radio Controller controls the top level state of the radio subsystem in the EFR32MG21. It performs the following tasks:

- Precisely-timed control of enabling and disabling of the receiver and transmitter circuitry
- Run-time calibration of receiver, transmitter and frequency synthesizer
- Detailed frame transmission timing, including optional LBT or CSMA-CA

3.3 General Purpose Input/Output (GPIO)

EFR32MG21 has up to 20 General Purpose Input/Output pins. Each GPIO pin can be individually configured as either an output or input. More advanced configurations including open-drain, open-source, and glitch-filtering can be configured for each individual GPIO pin. The GPIO pins can be overridden by peripheral connections, like SPI communication. Each peripheral connection can be routed to several GPIO pins on the device. The input value of a GPIO pin can be routed through the Peripheral Reflex System to other peripherals. The GPIO subsystem supports asynchronous external pin interrupts.

All of the pins on ports A and port B are EM2 capable. These pins may be used by Low-Energy peripherals in EM2/3 and may also be used as EM2/3 pin wake-ups. Pins on ports C and D are latched/retained in their current state when entering EM2 until EM2 exit upon which internal peripherals could once again drive those pads.

A few GPIOs also have EM4 wake functionality. These pins are listed in the Alternate Function Table.

3.4 Clocking

3.4.1 Clock Management Unit (CMU)

The Clock Management Unit controls oscillators and clocks in the EFR32MG21. Individual enabling and disabling of clocks to all peripheral modules is performed by the CMU. The CMU also controls enabling and configuration of the oscillators. A high degree of flexibility allows software to optimize energy consumption in any specific application by minimizing power dissipation in unused peripherals and oscillators.

3.4.2 Internal and External Oscillators

The EFR32MG21 supports two crystal oscillators and fully integrates five RC oscillators, listed below.

- A high frequency crystal oscillator (HFXO) with integrated load capacitors, tunable in small steps, provides a precise timing reference for the MCU and RF synthesizer. The HFXO provides excellent RF clocking performance using a 38.4 MHz crystal. The HFXO can also support an external clock source such as a TCXO for applications that require an extremely accurate clock frequency over temperature.
- A 32.768 kHz crystal oscillator (LFXO) provides an accurate timing reference for low energy modes.
- An integrated high frequency RC oscillator (HFRCO) is available for the MCU system, when crystal accuracy is not required. The HFRCO employs fast start-up at minimal energy consumption combined with a wide frequency range, from 1 MHz to 80 MHz.
- An integrated high frequency RC oscillator (HFRCOEM2) runs down to EM2 and is available for timing the general-purpose ADC and the Serial Wire Viewer port with a wide frequency range.
- An integrated fast start-up RC oscillator (FSRCO) that runs at a fixed 20 MHz
- An integrated low frequency 32.768 kHz RC oscillator (LFRCO) for low power operation where high accuracy is not required.
- An integrated ultra-low frequency 1 kHz RC oscillator (ULFRCO) is available to provide a timing reference at the lowest energy consumption in low energy modes.

3.5 Counters/Timers and PWM

3.5.1 Timer/Counter (TIMER)

TIMER peripherals keep track of timing, count events, generate PWM outputs and trigger timed actions in other peripherals through the Peripheral Reflex System (PRS). The core of each TIMER is a 16-bit or 32-bit counter with up to 3 compare/capture channels. Each channel is configurable in one of three modes. In capture mode, the counter state is stored in a buffer at a selected input event. In compare mode, the channel output reflects the comparison of the counter to a programmed threshold value. In PWM mode, the TIMER supports generation of pulse-width modulation (PWM) outputs of arbitrary waveforms defined by the sequence of values written to the compare registers. In addition some timers offer dead-time insertion.

See [3.12 Configuration Summary](#) for information on the feature set of each timer.

3.5.2 Low Energy Timer (LETIMER)

The unique LETIMER is a 24-bit timer that is available in energy mode EM0 Active, EM1 Sleep, EM2 Deep Sleep, and EM3 Stop. This allows it to be used for timing and output generation when most of the device is powered down, allowing simple tasks to be performed while the power consumption of the system is kept at an absolute minimum. The LETIMER can be used to output a variety of waveforms with minimal software intervention. The LETIMER is connected to the Peripheral Reflex System (PRS), and can be configured to start counting on compare matches from other peripherals such as the Real Time Clock.

3.5.3 Real Time Clock with Capture (RTCC)

The Real Time Clock with Capture (RTCC) is a 32-bit counter providing timekeeping down to EM3. The RTCC can be clocked by any of the on-board low-frequency oscillators, and it is capable of providing system wake-up at user defined intervals.

A secondary RTC is used by the RF protocol stack for event scheduling, leaving the primary RTCC block available exclusively for application software.

3.5.4 Back-Up Real Time Counter (BURTC)

The Back-Up Real Time Counter (BURTC) is a 32-bit counter providing timekeeping in all energy modes, including EM4. The BURTC can be clocked by any of the on-board low-frequency oscillators, and it is capable of providing system wake-up at user-defined intervals.

3.5.5 Watchdog Timer (WDOG)

The watchdog timer can act both as an independent watchdog or as a watchdog synchronous with the CPU clock. It has windowed monitoring capabilities, and can generate a reset or different interrupts depending on the failure mode of the system. The watchdog can also monitor autonomous systems driven by the Peripheral Reflex System (PRS).

3.6 Communications and Other Digital Peripherals

3.6.1 Universal Synchronous/Asynchronous Receiver/Transmitter (USART)

The Universal Synchronous/Asynchronous Receiver/Transmitter is a flexible serial I/O module. It supports full duplex asynchronous UART communication with hardware flow control as well as RS-485, SPI, MicroWire and 3-wire. It can also interface with devices supporting:

- ISO7816 SmartCards
- IrDA
- I²S

3.6.2 Inter-Integrated Circuit Interface (I²C)

The I²C module provides an interface between the MCU and a serial I²C bus. It is capable of acting as a main or secondary interface and supports multi-drop buses. Standard-mode, fast-mode and fast-mode plus speeds are supported, allowing transmission rates from 10 kbit/s up to 1 Mbit/s. Bus arbitration and timeouts are also available, allowing implementation of an SMBus-compliant system. The interface provided to software by the I²C module allows precise timing control of the transmission process and highly automated transfers. Automatic recognition of addresses is provided in active and low energy modes. Note that not all instances of I²C are available in all energy modes.

3.6.3 Peripheral Reflex System (PRS)

The Peripheral Reflex System provides a communication network between different peripheral modules without software involvement. Peripheral modules producing Reflex signals are called producers. The PRS routes Reflex signals from producers to consumer peripherals which in turn perform actions in response. Edge triggers and other functionality such as simple logic operations (AND, OR, NOT) can be applied by the PRS to the signals. The PRS allows peripherals to act autonomously without waking the MCU core, saving power.

3.7 Secure Vault Features

A dedicated hardware secure engine containing its own CPU enables the Secure Vault functions. It isolates cryptographic functions and data from the host Cortex-M33 core, and provides several additional security features. The EFR32MG21 family includes devices with Secure Vault High and Secure Vault Mid capabilities, which are summarized in the table below.

Table 3.1. Secure Vault Features

| Feature | Secure Vault Mid | Secure Vault High |
|--|--|--|
| True Random Number Generator (TRNG) | Yes | Yes |
| Secure Boot with Root of Trust and Secure Loader (RTSL) | Yes | Yes |
| Secure Debug with Lock/Unlock | Yes | Yes |
| DPA Countermeasures | Yes | Yes |
| Anti-Tamper | | Yes |
| Secure Attestation | | Yes |
| Secure Key Management | | Yes |
| Symmetric Encryption | <ul style="list-style-type: none"> AES 128 / 192 / 256 bit <ul style="list-style-type: none"> ECB, CTR, CBC, CFB, CCM, GCM, CBC-MAC, and GMAC | <ul style="list-style-type: none"> AES 128 / 192 / 256 bit <ul style="list-style-type: none"> ECB, CTR, CBC, CFB, CCM, GCM, CBC-MAC, and GMAC ChaCha20 |
| Public Key Encryption - ECDSA / ECDH / EdDSA | <ul style="list-style-type: none"> p192 and p256 Curve25519 (ECDH)¹ Ed25519 (EdDSA)¹ | <ul style="list-style-type: none"> p192, p256, p384 and p521 Curve25519 (ECDH) Ed25519 (EdDSA) |
| Key Derivation | <ul style="list-style-type: none"> ECJ-PAKE p192 and p256 | <ul style="list-style-type: none"> ECJ-PAKE p192, p256, p384, and p521 PBKDF2 HKDF |
| Hashes | <ul style="list-style-type: none"> SHA-1 SHA-2/256 | <ul style="list-style-type: none"> SHA-1 SHA-2 256, 384, and 512 Poly1305 |
| Note: | | |
| 1. These curves are supported in devices running SE v1.2.11 and higher | | |

3.7.1 Secure Boot with Root of Trust and Secure Loader (RTSL)

The Secure Boot with RTSL authenticates a chain of trusted firmware that begins from an immutable memory (ROM).

It prevents malware injection, prevents rollback, ensures that only authentic firmware is executed, and protects Over The Air updates.

For more information about this feature, see [AN1218: Series 2 Secure Boot with RTSL](#).

3.7.2 Cryptographic Accelerator

The Cryptographic Accelerator is an autonomous hardware accelerator with Differential Power Analysis (DPA) countermeasures to protect keys.

It supports AES encryption and decryption with 128/192/256-bit keys, ChaCha20 encryption, and Elliptic Curve Cryptography (ECC) to support public key operations, and hashes.

Supported block cipher modes of operation for AES include:

- ECB (Electronic Code Book)
- CTR (Counter Mode)
- CBC (Cipher Block Chaining)
- CFB (Cipher Feedback)
- GCM (Galois Counter Mode)
- CCM (Counter with CBC-MAC)
- CBC-MAC (Cipher Block Chaining Message Authentication Code)
- GMAC (Galois Message Authentication Code)

The Cryptographic Accelerator accelerates Elliptic Curve Cryptography and supports the NIST (National Institute of Standards and Technology) recommended curves including P-192, P-256, P-384, and P-521 for ECDH (Elliptic Curve Diffie-Hellman) key derivation, and ECDSA (Elliptic Curve Digital Signature Algorithm) sign and verify operations. Also supported is the non-NIST Curve25519 for ECDH and Ed25519 for EdDSA (Edwards-curve Digital Signature Algorithm) sign and verify operations.

Secure Vault also supports ECJ-PAKE (Elliptic Curve variant of Password Authenticated Key Exchange by Juggling) and PBKDF2 (Password-Based Key Derivation Function 2).

Supported hashes include SHA-1, SHA-2/256/384/512 and Poly1305.

This implementation provides a fast and energy efficient solution to state of the art cryptographic needs.

3.7.3 True Random Number Generator

The True Random Number Generator module is a non-deterministic random number generator that harvests entropy from a thermal energy source. It includes start-up health tests for the entropy source as required by NIST SP800-90B and AIS-31 as well as online health tests required for NIST SP800-90C.

The TRNG is suitable for periodically generating entropy to seed an approved pseudo random number generator.

3.7.4 Secure Debug with Lock/Unlock

For obvious security reasons, it is critical for a product to have its debug interface locked before being released in the field.

Secure Vault also provides a secure debug unlock function that allows authenticated access based on public key cryptography. This functionality is particularly useful for supporting failure analysis while maintaining confidentiality of IP and sensitive end-user data.

For more information about this feature, see [AN1190: Series 2 Secure Debug](#).

3.7.5 DPA Countermeasures

The AES and ECC accelerators have Differential Power Analysis (DPA) countermeasures support. This makes it very expensive from a time and effort standpoint to use DPA to recover secret keys.

3.7.6 Secure Key Management with PUF

Key material in Secure Vault High products is protected by "key wrapping" with a standardized symmetric encryption mechanism. This method has the advantage of protecting a virtually unlimited number of keys, limited only by the storage that is accessible by the Cortex-M33, which includes off-chip storage as well. The symmetric key used for this wrapping and unwrapping must be highly secure because it can expose all other key materials in the system. The Secure Vault Key Management system uses a Physically Unclonable Function (PUF) to generate a persistent device-unique seed key on power up to dynamically generate this critical wrapping/unwrapping key which is only visible to the AES encryption engine and is not retained when the device loses power.

3.7.7 Anti-Tamper

Secure Vault High devices provide internal tamper protection which monitors parameters such as voltage, temperature, and electromagnetic pulses as well as detecting tamper of the security sub-system itself. Additionally, 8 external configurable tamper pins support external tamper sources, such as enclosure tamper switches.

For each tamper event, the user is able to select the severity of the tamper response ranging from an interrupt, to a reset, to destroying the PUF reconstruction data which will make all protected key materials un-recoverable and effectively render the device inoperable. The tamper system also has an internal resettable event counter with programmable trigger threshold and refresh periods to mitigate false positive tamper events.

For more information about this feature, see [AN1247: Anti-Tamper Protection Configuration and Use](#).

3.7.8 Secure Attestation

Secure Vault High products support Secure Attestation, which begins with a secure identity that is created during the Silicon Labs manufacturing process. During device production, each device generates its own public/private keypair and securely stores the wrapped private key into immutable OTP memory and this key never leaves the device. The corresponding public key is extracted from the device and inserted into a binary DER-encoded X.509 device certificate, which is signed into a Silicon Labs CA chain and then programmed back into the chip into an immutable OTP memory.

The secure identity can be used to authenticate the chip at any time in the life of the product. The production certification chain can be requested remotely from the product. This certification chain can be used to verify that the device was authentically produced by Silicon Labs. The device unique public key is also bound to the device certificate in the certification chain. A challenge can be sent to the chip at any point in time to be signed by the device private key. The public key in the device certificate can then be used to verify the challenge response, proving that the device has access to the securely-stored private key, which prevents counterfeit products or impersonation attacks.

For more information about this feature, see [AN1268: Authenticating Silicon Labs Devices Using Device Certificates](#).

3.8 Analog

3.8.1 Analog Comparator (ACMP)

The Analog Comparator is used to compare the voltage of two analog inputs, with a digital output indicating which input voltage is higher. Inputs are selected from among internal references and external pins. The tradeoff between response time and current consumption is configurable by software. Two 6-bit reference dividers allow for a wide range of internally-programmable reference sources. The ACMP can also be used to monitor the supply voltage. An interrupt can be generated when the supply falls below or rises above the programmable threshold.

3.8.2 Analog to Digital Converter (IADC)

The IADC is a hybrid architecture combining techniques from both SAR and Delta-Sigma style converters. It has a resolution of up to 12 bits at up to 1 Msps. Hardware oversampling reduces system-level noise over multiple front-end samples. The IADC includes integrated voltage references. Inputs are selectable from a wide range of sources, including pins configurable as either single-ended or differential.

3.9 Reset Management Unit (RMU)

The RMU is responsible for handling reset of the EFR32MG21. A wide range of reset sources are available, including several power supply monitors, pin reset, software controlled reset, core lockup reset, and watchdog reset.

3.10 Core and Memory

3.10.1 Processor Core

The ARM Cortex-M processor includes a 32-bit RISC processor integrating the following features and tasks in the system:

- ARM Cortex-M33 RISC processor achieving 1.50 Dhystone MIPS/MHz
- ARM TrustZone security technology
- Embedded Trace Macrocell (ETM) for real-time trace and debug
- Up to 1024 kB flash program memory
- Up to 96 kB RAM data memory
- Configuration and event handling of all modules
- 2-pin Serial-Wire debug interface

3.10.2 Memory System Controller (MSC)

The Memory System Controller (MSC) is the program memory unit of the microcontroller. The flash memory is readable and writable from both the Cortex-M33 and LDMA. In addition to the main flash array where Program code is normally written the MSC also provides an Information block where additional information such as special user information or flash-lock bits are stored. There is also a read-only page in the information block containing system and device calibration data. Read and write operations are supported in energy modes EM0 Active and EM1 Sleep.

3.10.3 Linked Direct Memory Access Controller (LDMA)

The Linked Direct Memory Access (LDMA) controller allows the system to perform memory operations independently of software. This reduces both energy consumption and software workload. The LDMA allows operations to be linked together and staged, enabling sophisticated operations to be implemented.

3.11 Memory Map

The EFR32MG21 memory map is shown in the figures below. RAM and flash sizes are for the largest memory configuration.

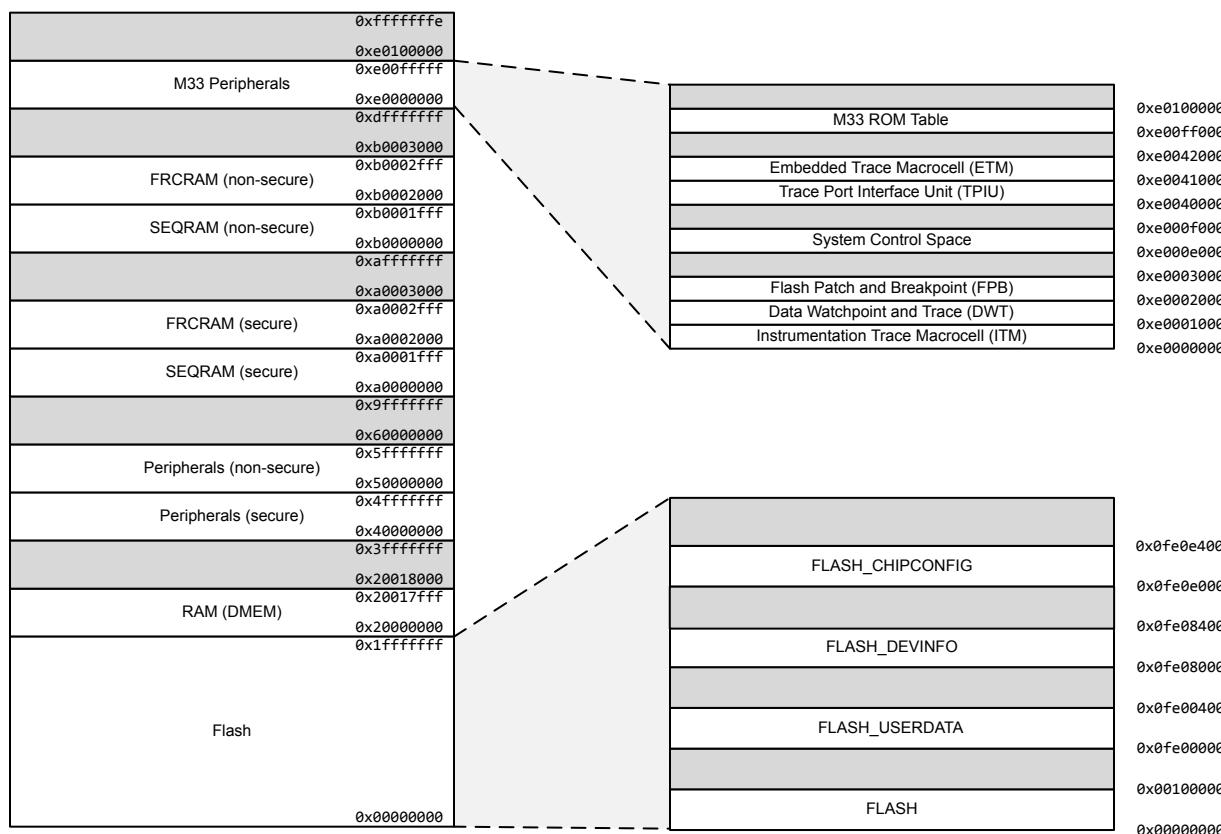


Figure 3.2. EFR32MG21 Memory Map — Core Peripherals and Code Space

3.12 Configuration Summary

The features of the EFR32MG21 are a subset of the feature set described in the device reference manual. The table below describes device specific implementation of the features. Remaining modules support full configuration.

Table 3.2. Configuration Summary

| Module | Lowest Energy Mode | Configuration |
|--------|--------------------|--------------------------|
| TIMER0 | EM1 | 32-bit, 3-channels, +DTI |
| TIMER1 | EM1 | 16-bit, 3-channels, +DTI |
| TIMER2 | EM1 | 16-bit, 3-channels, +DTI |
| TIMER3 | EM1 | 16-bit, 3-channels, +DTI |
| USART0 | EM1 | +IrDA, +I2S, +SmartCard |
| USART1 | EM1 | +IrDA, +I2S, +SmartCard |
| USART2 | EM1 | +IrDA, +I2S, +SmartCard |
| I2C0 | EM2 / EM3 | |
| I2C1 | EM1 | |

4. Electrical Specifications

4.1 Electrical Characteristics for Revision B

All electrical parameters in all tables are specified under the following conditions, unless stated otherwise:

- Typical values are based on $T_A = 25^\circ\text{C}$ and all supplies at 3.0 V, by production test and/or technology characterization.
- Radio performance numbers are measured in conducted mode, based on Silicon Laboratories reference designs using output power-specific external RF impedance-matching networks for interfacing to a $50\ \Omega$ antenna.
- Minimum and maximum values represent the worst conditions across supply voltage, process variation, and operating temperature, unless stated otherwise.

Power Supply Pin Dependencies

Due to on-chip circuitry (e.g., diodes), some EFR32 power supply pins have a dependent relationship with one or more other power supply pins. These internal relationships between the external voltages applied to the various EFR32 supply pins are defined below. Exceeding the below constraints can result in damage to the device and/or increased current draw.

- $\text{DVDD} \geq \text{DECOPLE}$
- $\text{PAVDD} \geq \text{RFVDD}$
- $\text{AVDD}, \text{IOVDD}$: No dependency with each other or any other supply pin. Additional leakage may occur if DVDD remains unpowered with power applied to these supplies.

4.1.1 Absolute Maximum Ratings

Stresses above those listed below may cause permanent damage to the device. This is a stress rating only and functional operation of the devices at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

Table 4.1. Absolute Maximum Ratings

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|------------------------|----------------|------|-----|--------------------------|-------------|
| Storage temperature range | T _{STG} | | -50 | — | +150 | °C |
| Junction temperature | T _{JMAX} | -I grade | — | — | +135 | °C |
| Voltage on any supply pin | V _{DDMAX} | | -0.3 | — | 3.8 | V |
| Voltage ramp rate on any supply pin | V _{DDRAMPMAX} | | — | — | 1.0 | V / μ s |
| Voltage on HFXO pins | V _{HFXOPIN} | | -0.3 | — | 1.2 | V |
| DC voltage on any GPIO pin | V _{DIGPIN} | | -0.3 | — | V _{IOVDD} + 0.3 | V |
| DC voltage on RESETn pin ¹ | V _{RESETn} | | -0.3 | — | 3.8 | V |
| Input RF level on pins RF2G4_IO1 and RF2G4_IO2 | P _{RFMAX2G4} | | — | — | +10 | dBm |
| Absolute voltage on RF pins RF2G4_IOx | V _{MAX2G4} | | -0.3 | — | V _{PAVDD} | V |
| Total current into VDD power lines | I _{VDDMAX} | Source | — | — | 200 | mA |
| Total current into VSS ground lines | I _{VSSMAX} | Sink | — | — | 200 | mA |
| Current per I/O pin | I _{IOMAX} | Sink | — | — | 50 | mA |
| | | Source | — | — | 50 | mA |
| Current for all I/O pins | I _{IOMAX} | Sink | — | — | 200 | mA |
| | | Source | — | — | 200 | mA |

Note:

1. The RESETn pin has a pull-up device to the DVDD supply. For minimum leakage, RESETn should not exceed the voltage at DVDD.

4.1.2 General Operating Conditions

This table specifies the general operating temperature range and supply voltage range for all supplies. The minimum and maximum values of all other tables are specified over this operating range, unless otherwise noted.

Table 4.2. General Operating Conditions

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------|--|------|------|-------------|------|
| Operating ambient temperature range | T_A | -I temperature grade ¹ | -40 | — | +125 | ° C |
| DVDD supply voltage | V_{DVDD} | EM0/1 | 1.71 | 3.0 | 3.8 | V |
| | | EM2/3/4 ² | 1.71 | 3.0 | 3.8 | V |
| AVDD supply voltage | V_{AVDD} | | 1.71 | 3.0 | 3.8 | V |
| IOVDDx operating supply voltage (All IOVDD pins) | V_{IOVDDx} | | 1.71 | 3.0 | 3.8 | V |
| PAVDD operating supply voltage | V_{PAVDD} | | 1.71 | 3.0 | 3.8 | V |
| RFVDD operating supply voltage | V_{RFVDD} | | 1.71 | 3.0 | V_{PAVDD} | V |
| DECOUPLE output capacitor ³ | $C_{DECOUPLE}$ | | 0.75 | 1.0 | 2.75 | μF |
| HCLK and Core frequency | f_{HCLK} | MODE = WS1, RAMWSEN = 1 ⁴ | — | — | 80 | MHz |
| | | MODE = WS1, RAMWSEN = 0 ⁴ | — | — | 50 | MHz |
| | | MODE = WS0, RAMWSEN = 0 ⁴ | — | — | 39 | MHz |
| PCLK frequency | f_{PCLK} | | — | — | 50 | MHz |
| EM01 Group A clock frequency | $f_{EM01GRPACLK}$ | | — | — | 80 | MHz |
| HCLK Radio frequency ⁵ | $f_{HCLKRADIO}$ | | 38 | 38.4 | 40 | MHz |
| External Clock Input | f_{CLKIN} | VSCALE2 or VSCALE1, IOVDD \geq 2.7 V | — | — | 40 | MHz |
| DPLL Reference Clock | $f_{DPLLREFCLK}$ | VSCALE2 or VSCALE1 | — | — | 40 | MHz |

Note:

1. The device may operate continuously at the maximum allowable ambient T_A rating as long as the absolute maximum T_{JMAX} is not exceeded. For an application with significant power dissipation, the allowable T_A may be lower than the maximum T_A rating. $T_A = T_{JMAX} - (T_{\theta JA} \times \text{PowerDissipation})$. Refer to the Absolute Maximum Ratings table and the Thermal Characteristics table for T_{JMAX} and $T_{\theta JA}$.
2. The DVDD supply is monitored by the DVDD BOD in EM0/1 and the LE DVDD BOD in EM2/3/4.
3. The system designer should consult the characteristic specs of the capacitor used on DECOUPLE to ensure its capacitance value stays within the specified bounds across temperature and DC bias.
4. Flash wait states are set by the MODE field in the MSC_READCTRL register. RAM wait states are enabled by setting the RAMWSEN bit in the SYSYCFG_DMEM0RAMCTRL register.
5. The recommended radio crystal frequency is 38.4 MHz. Any crystal frequency other than 38.4 MHz is expressly not supported. The minimum and maximum HCLKRADIO frequency in this table represent the design limits, which are much wider than the typical crystal tolerance.

4.1.3 Thermal Characteristics

Table 4.3. Thermal Characteristics

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------------------------------|--|-----|------|-----|------|
| Thermal Resistance Junction to Ambient QFN32 (4x4mm) Package | THE-TA _{JA_QFN32_4X4} | 2-Layer PCB, Natural Convection ¹ | — | 94.3 | — | °C/W |
| | | 4-Layer PCB, Natural Convection ¹ | — | 35.4 | — | °C/W |
| Thermal Resistance Junction to Case QFN32 (4x4mm) Package | THE-TA _{JC_QFN32_4X4} | 2-Layer PCB, Natural Convection ¹ | — | 36.3 | — | °C/W |
| | | 4-Layer PCB, Natural Convection ¹ | — | 23.5 | — | °C/W |

Note:

1. Measured according to JEDEC standard JESD51-2A. Integrated Circuit Thermal Test Method Environmental Conditions - Natural Convection (Still Air).

4.1.4 Current Consumption

4.1.4.1 MCU Current Consumption at 1.8 V

Unless otherwise indicated, typical conditions are: AVDD = DVDD = RFVDD = PAVDD = 1.8V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation at TA = 25 °C.

Table 4.4. MCU Current Consumption at 1.8 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|---|-----|------|-----|--------|
| Current consumption in EM0 mode with all peripherals disabled ¹ | I _{ACTIVE} | 80 MHz HFRCO, CPU running Prime from flash | — | 50.9 | — | µA/MHz |
| | | 80 MHz HFRCO, CPU running while loop from flash | — | 45.5 | — | µA/MHz |
| | | 80 MHz HFRCO, CPU running CoreMark loop from flash | — | 59.7 | — | µA/MHz |
| | | 38.4 MHz crystal, CPU running while loop from flash | — | 63.6 | — | µA/MHz |
| | | 38 MHz HFRCO, CPU running while loop from flash | — | 55.5 | — | µA/MHz |
| | | 26 MHz HFRCO, CPU running while loop from flash | — | 59.1 | — | µA/MHz |
| | | 16 MHz HFRCO, CPU running while loop from flash | — | 67.0 | — | µA/MHz |
| | | 1 MHz HFRCO, CPU running while loop from flash | — | 360 | — | µA/MHz |
| Current consumption in EM1 mode with all peripherals disabled ¹ | I _{EM1} | 80 MHz HFRCO | — | 28.7 | — | µA/MHz |
| | | 38.4 MHz crystal | — | 46.7 | — | µA/MHz |
| | | 38 MHz HFRCO | — | 38.7 | — | µA/MHz |
| | | 26 MHz HFRCO | — | 42.2 | — | µA/MHz |
| | | 16 MHz HFRCO | — | 50.0 | — | µA/MHz |
| | | 1 MHz HFRCO | — | 343 | — | µA/MHz |
| Current consumption in EM2 mode | I _{EM2} | Full RAM retention and RTC running from LFXO | — | 5.0 | — | µA |
| | | Full RAM retention and RTC running from LFRCO | — | 5.0 | — | µA |
| | | 1 bank (16kB) RAM retention and RTC running from LFRCO | — | 4.5 | — | µA |
| Current consumption in EM3 mode | I _{EM3} | Full RAM retention and RTC running from ULFRCO | — | 4.7 | — | µA |
| | | 1 bank (16kB) RAM retention and RTC running from ULFRCO | — | 4.2 | — | µA |
| Current consumption in EM4 mode | I _{EM4} | No BURTC, no LF oscillator | — | 0.14 | — | µA |
| | | BURTC with LFXO | — | 0.51 | — | µA |
| Current consumption during reset | I _{RST} | Hard pin reset held | — | 107 | — | µA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-----------|----------------|-----|------|-----|---------|
| Current Consumption per retained 16kB RAM bank in EM2 | I_{RAM} | | — | 0.10 | — | μA |

Note:

1. The typical EM0/EM1 current measurement includes some current consumed by the security core for periodical housekeeping purposes. This does not include current consumed by user-triggered security operations, such as cryptographic calculations.

4.1.4.2 MCU Current Consumption at 3.0 V

Unless otherwise indicated, typical conditions are: AVDD = DVDD = RFVDD = PAVDD = 3.0 V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation at TA = 25 °C.

Table 4.5. MCU Current Consumption at 3.0 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|------|------|--------|
| Current consumption in EM0 mode with all peripherals disabled ¹ | I _{ACTIVE} | 80 MHz HFRCO, CPU running Prime from flash | — | 50.9 | — | µA/MHz |
| | | 80 MHz HFRCO, CPU running while loop from flash | — | 45.6 | 55.5 | µA/MHz |
| | | 80 MHz HFRCO, CPU running CoreMark loop from flash | — | 59.8 | — | µA/MHz |
| | | 38.4 MHz crystal, CPU running while loop from flash | — | 63.8 | — | µA/MHz |
| | | 38 MHz HFRCO, CPU running while loop from flash | — | 55.6 | 75.1 | µA/MHz |
| | | 26 MHz HFRCO, CPU running while loop from flash | — | 59.1 | — | µA/MHz |
| | | 16 MHz HFRCO, CPU running while loop from flash | — | 67.1 | — | µA/MHz |
| | | 1 MHz HFRCO, CPU running while loop from flash | — | 362 | 1018 | µA/MHz |
| Current consumption in EM1 mode with all peripherals disabled ¹ | I _{EM1} | 80 MHz HFRCO | — | 28.7 | 37.6 | µA/MHz |
| | | 38.4 MHz crystal | — | 46.9 | — | µA/MHz |
| | | 38 MHz HFRCO | — | 38.7 | 57.5 | µA/MHz |
| | | 26 MHz HFRCO | — | 42.2 | — | µA/MHz |
| | | 16 MHz HFRCO | — | 50.2 | — | µA/MHz |
| | | 1 MHz HFRCO | — | 345 | 994 | µA/MHz |
| Current consumption in EM2 mode | I _{EM2} | Full RAM retention and RTC running from LFXO | — | 5.1 | — | µA |
| | | Full RAM retention and RTC running from LFRCO | — | 5.0 | — | µA |
| | | 1 bank (16 kB) RAM retention and RTC running from LFRCO | — | 4.5 | 10.5 | µA |
| Current consumption in EM3 mode | I _{EM3} | Full RAM retention and RTC running from ULFRCO | — | 4.8 | 11.4 | µA |
| | | 1 bank (16 kB) RAM retention and RTC running from ULFRCO | — | 4.3 | — | µA |
| Current consumption in EM4 mode | I _{EM4} | No BURTC, no LF oscillator | — | 0.21 | 0.5 | µA |
| | | BURTC with LFXO | — | 0.61 | — | µA |
| Current consumption during reset | I _{RST} | Hard pin reset held | — | 146 | — | µA |
| Current consumption per retained 16kB RAM bank in EM2 | I _{RAM} | | — | 0.10 | — | µA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------|----------------|-----|-----|-----|------|
| Note: | | | | | | |
| 1. The typical EM0/EM1 current measurement includes some current consumed by the security core for periodical housekeeping purposes. This does not include current consumed by user-triggered security operations, such as cryptographic calculations. | | | | | | |

4.1.4.3 Radio Current Consumption at 1.8 V

RF current consumption measured with MCU in EM1, HCLK = 38.4 MHz, and all MCU peripherals disabled. Unless otherwise indicated, typical conditions are: AVDD = DVDD = IOVDD = RFVDD = PAVDD = 1.8V. Minimum and maximum values in this table represent the worst conditions across process variation at $T_A = 25^\circ\text{C}$.

Table 4.6. Radio Current Consumption at 1.8 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|------------------|---|-----|------|-----|------|
| Current consumption in receive mode, active packet reception | I_{RX_ACTIVE} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.1 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 8.8 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.4 | — | mA |
| | | 802.15.4 receiving frame, $f = 2.4$ GHz | — | 9.4 | — | mA |
| Current consumption in receive mode, listening for packet | I_{RX_LISTEN} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.8 | — | mA |
| | | 802.15.4, $f = 2.4$ GHz | — | 9.2 | — | mA |
| Current consumption in transmit mode | I_{TX} | $f = 2.4$ GHz, CW, 0 dBm PA, 0 dBm output power | — | 9.3 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 0 dBm output power | — | 16.6 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 10 dBm output power | — | 33.8 | — | mA |

4.1.4.4 Radio Current Consumption at 3.0 V

RF current consumption measured with MCU in EM1, HCLK = 38.4 MHz, and all MCU peripherals disabled. Unless otherwise indicated, typical conditions are: AVDD = DVDD = IOVDD = RFVDD = PAVDD = 3.0V. Minimum and maximum values in this table represent the worst conditions across process variation at $T_A = 25^\circ\text{C}$.

Table 4.7. Radio Current Consumption at 3.0 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|------------------|--|-----|------|-----|------|
| Current consumption in receive mode, active packet reception | I_{RX_ACTIVE} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.1 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 8.8 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.4 | — | mA |
| | | 802.15.4 receiving frame, $f = 2.4$ GHz | — | 9.5 | — | mA |
| Current consumption in receive mode, listening for packet | I_{RX_LISTEN} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.8 | — | mA |
| | | 802.15.4, $f = 2.4$ GHz | — | 9.2 | — | mA |
| Current consumption in transmit mode | I_{TX} | $f = 2.4$ GHz, CW, 0 dBm PA, 0 dBm output power | — | 10.5 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 0 dBm output power | — | 16.7 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 10 dBm output power | — | 34.0 | — | mA |
| | | $f = 2.4$ GHz, CW, 20 dBm PA, 10 dBm output power, PAVDD = 3.0 V | — | 60.8 | — | mA |
| | | $f = 2.4$ GHz, CW, 20 dBm PA, 20 dBm output power, PAVDD = 3.3 V | — | 185 | — | mA |

4.1.5 2.4 GHz RF Transceiver Characteristics

4.1.5.1 RF Transmitter Characteristics

4.1.5.1.1 RF Transmitter General Characteristics for the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.8. RF Transmitter General Characteristics for the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-------------------------------|--|------|-------|--------|------|
| RF test frequency range | F_{RANGE} | | 2400 | — | 2483.5 | MHz |
| Maximum TX power ¹ | POUT_{MAX} | 20 dBm PA, $\text{PAVDD} = 3.3\text{ V}$ | — | +20.2 | — | dBm |
| Maximum TX power | $\text{POUT}_{\text{MAX10}}$ | 10 dBm PA | — | +10.5 | — | dBm |
| Maximum TX power | $\text{POUT}_{\text{MAX0}}$ | 0 dBm PA | — | +0.4 | — | dBm |
| Minimum active TX power | POUT_{MIN} | 20 dBm PA, $\text{PAVDD} = 3.3\text{ V}$ | — | -20.5 | — | dBm |
| | | 10 dBm PA | — | -19.3 | — | dBm |
| | | 0 dBm PA | — | -23.5 | — | dBm |
| Output power step size | $\text{POUT}_{\text{STEP}}$ | 0 dBm PA, -15 dBm < Output Power < -5 dBm | — | 1.5 | — | dB |
| | | 0 dBm PA, -5 dBm < Output Power < 0 dBm | — | 0.3 | — | dB |
| | | 10 dBm PA, -5 dBm < Output power < 0 dBm | — | 1.5 | — | dB |
| | | 10 dBm PA, 0 dBm < Output power < 10 dBm | — | 1.0 | — | dB |
| | | 20 dBm PA, 0 dBm < Output Power < 5 dBm | — | 0.7 | — | dB |
| | | 20 dBm PA, 5 dBm < output power < POUT_{MAX} | — | 0.5 | — | dB |
| Output power variation vs PAVDD supply voltage variation, frequency = 2450 MHz | $\text{POUT}_{\text{VAR_V}}$ | 20 dBm PA $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ output power with PAVDD voltage swept from 3.0V to 3.8V. | — | 0.8 | — | dB |
| | | 10 dbm PA output power with PAVDD voltage swept from 1.8 V to 3.0 V | — | 0.1 | — | dB |
| | | 0 dBm PA output power with PAVDD voltage swept from 1.8 V to 3.0 V | — | 0.1 | — | dB |
| Output power variation vs temperature, Frequency = 2450 MHz | $\text{POUT}_{\text{VAR_T}}$ | $\text{AVDD} = 3.3\text{V}$ supply, 20 dBm PA at $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, (-40 to +125 $^\circ\text{C}$) | — | 1.5 | — | dB |
| | | 10 dBm PA at 10 dBm, (-40 to +125 $^\circ\text{C}$) | — | 0.3 | — | dB |
| | | 0 dBm PA at 0 dBm, (-40 to +125 $^\circ\text{C}$) | — | 2.1 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-----------------------------|--|-----|-----|-----|------|
| Output power variation vs RF frequency | POUT _{VAR_F} | 20 dBm PA, POUT _{MAX} , PAVDD = 3.3 V. | — | 0.2 | — | dB |
| | | 10 dBm PA, 10 dBm | — | 0.2 | — | dB |
| | | 0 dBm PA, 0 dBm | — | 0.1 | — | dB |
| Spurious emissions of harmonics in restricted bands per FCC Part 15.205/15.209 | SPUR _{HRM_FCC_R} | Continuous transmission of CW carrier. P _{out} = POUT _{MAX} . PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Continuous transmission of CW carrier, P _{out} = 10 dBm, Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| Spurious emissions of harmonics in non-restricted bands per FCC Part 15.247/15.35 | SPUR _{HRM_FCC_NRR} | Continuous transmission of CW carrier, P _{out} = POUT _{MAX} , PAVDD = 3.3V, Test Frequency = 2450 MHz. | — | -26 | — | dBc |
| | | Continuous transmission of CW carrier. P _{out} = 10 dBm. Test Frequency = 2450 MHz. | — | -26 | — | dBc |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|---------------------------|---|-----|-----|-----|------|
| Spurious emissions out-of-band (above 2.483 GHz or below 2.4 GHz) in restricted bands, per FCC part 15.205/15.209 | SPUR _{OOB_FCC_R} | Restricted bands 30-88 MHz, Continuous transmission of CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands 88 - 216 MHz, Continuous transmission of CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands 216 - 960 MHz, Continuous transmission of CW carrier, 20 dBm PA $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands >960 MHz, Continuous transmission of CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V, Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands 30-88 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| | | Restricted bands 88 - 216 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| | | Restricted bands 216 - 960 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| | | Restricted bands > 960 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| Spurious emissions per ETSI EN300.440 | SPUR _{ETSI440} | 1G-14G, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -36 | — | dBm |
| | | 47-74 MHz, 87.5-108 MHz, 174-230 MHz, 470-862 MHz, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -56 | — | dBm |
| | | 25-1000 MHz, excluding above frequencies. $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -42 | — | dBm |
| | | 1G-12.75 GHz, excluding bands listed above, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz. | — | -50 | — | dBm |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|----------------------------|---|-----|-----|-----|------|
| Spurious emissions out-of-band in non-restricted bands per FCC Part 15.247 | SPUR _{OOB_FCC_NR} | Frequencies above 2.483 GHz or below 2.4 GHz, continuous transmission CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3 V, Test Frequency = 2450 MHz | — | -26 | — | dBc |
| | | Frequencies above 2.483 GHz or below 2.4 GHz, continuous transmission CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -26 | — | dBc |
| Spurious emissions out-of-band, per ETSI 300.328 | SPUR _{ETSI328} | [2400-2BW to 2400-BW], [2483.5+BW to 2483.5+2BW], $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -26 | — | dBm |
| | | [2400-BW to 2400], [2483.5 to 2483.5+BW] $P_{out} = 10$ dBm, Test Frequency = 2450 MHz. | — | -16 | — | dB |

Note:

1. Supported transmit power levels are determined by the ordering part number (OPN). Transmit power ratings for all devices covered in this data sheet can be found in the Max TX Power column of the Ordering Information Table.

4.1.5.1.2 RF Transmitter Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.9. RF Transmitter Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-------------------------------|--|-----|-------|-----|----------------------------|
| Error vector magnitude per 802.15.4-2011 | EVM | Average across frequency, signal is DSSS-OQPSK reference packet, $\text{PAVDD} = 3.3\text{V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | 2.7 | — | % rms |
| | | Average across frequency, signal is DSSS-OQPSK reference packet, $P_{\text{out}} = 10\text{ dBm}$ | — | 2.7 | — | % rms |
| | | Average across frequency, signal is DSSS-OQPSK reference packet, $P_{\text{out}} = 0\text{ dBm}$ | — | 2.8 | — | % rms |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | Relative, at carrier $\pm 3.5\text{ MHz}$, $\text{PAVDD} = 3.3\text{V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | -50.3 | — | $\text{dBc}/100\text{kHz}$ |
| | | Relative, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 10\text{ dBm}$ | — | -50.7 | — | $\text{dBc}/100\text{kHz}$ |
| | | Relative, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 0\text{ dBm}$ | — | -50.7 | — | $\text{dBc}/100\text{kHz}$ |
| | | Absolute, at carrier $\pm 3.5\text{ MHz}$, $\text{PAVDD} = 3.3\text{V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | -38.8 | — | $\text{dBm}/100\text{kHz}$ |
| | | Absolute, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 10\text{ dBm}$ | — | -49 | — | $\text{dBm}/100\text{kHz}$ |
| | | Absolute, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 0\text{ dBm}$ | — | -58.9 | — | $\text{dBm}/100\text{kHz}$ |
| | | Per FCC part 15.247, $\text{PAVDD} = 3.3\text{V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | +5.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per FCC part 15.247, $P_{\text{out}} = 10\text{ dBm}$ | — | -4.4 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per FCC part 15.247, $P_{\text{out}} = 0\text{ dBm}$ | — | -14.2 | — | $\text{dBm}/3\text{kHz}$ |
| | | ETSI 300.328 $P_{\text{out}} = 10\text{ dBm}$ | — | +8.1 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | 99% BW at highest and lowest channels in band, $P_{\text{out}} = 10\text{ dBm}$ | — | 2.3 | — | MHz |
| | | 99% BW at highest and lowest channels in band, $P_{\text{out}} = 0\text{ dBm}$ | — | 2.2 | — | MHz |

4.1.5.1.3 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.10. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|-------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 635.1 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 672.9 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 646.5 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | +6.4 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | -3.7 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -13.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | +10.2 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -26.3 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -36.4 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -46.3 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -20 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -41.9 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -51.5 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.1.5.1.4 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.11. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|--------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 1238.6 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 1182.5 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 1249.7 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | +3.7 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | -6.4 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -16.2 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | +9.0 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 2.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 2.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Inband spurs at $\pm 4\text{ MHz}$ | — | -31.7 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 4\text{ MHz}$ | — | -41.9 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 4\text{ MHz}$ | — | -51.7 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 6\text{ MHz}$ | — | -35.7 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 6\text{ MHz}$ | — | -46.0 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 6\text{ MHz}$ | — | -55.7 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.1.5.1.5 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.12. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|-------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 770.9 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 760.1 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 775.1 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | +5.4 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | -4.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -14.4 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | +10.2 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -38.3 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -47.6 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -20 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -42.3 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -51.8 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.1.5.1.6 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.13. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|-------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 609.7 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 619.3 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 617.4 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | +14.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | +4.5 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -5.3 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | +10.1 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -27.7 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -38.5 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -47.8 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -20 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -42.4 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -51.8 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.1.5.2 RF Receiver Characteristics

4.1.5.2.1 RF Receiver General Characteristics for the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.14. RF Receiver General Characteristics for the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|--------------------------------|---|------|-------|--------|------|
| RF tuning frequency range | F_{RANGE} | | 2400 | — | 2483.5 | MHz |
| Receive mode maximum spurious emission | SPUR_{RX} | 30 MHz to 1 GHz | — | -54.8 | — | dBm |
| | | 1 GHz to 12 GHz | — | -57.1 | — | dBm |
| Max spurious emissions during active receive mode, per FCC Part 15.109(a) | $\text{SPUR}_{\text{RX_FCC}}$ | 216 MHz to 960 MHz, conducted measurement | — | -54.8 | — | dBm |
| | | Above 960 MHz, conducted measurement. | — | -77.3 | — | dBm |

4.1.5.2.2 RF Receiver Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.15. RF Receiver Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|----------------------------|--|-----|--------|-----|------|
| Rx Max Strong Signal Input Level for 1% PER | RX_{SAT} | Signal is reference signal ¹ , packet length is 20 octets | — | 10 | — | dBm |
| Sensitivity, 1% PER | SENS | Signal is reference signal, packet length is 20 octets | — | -104.5 | — | dBm |
| Co-channel interferer rejection, 1% PER | CCR | Desired signal 3 dB above sensitivity limit | — | -0.2 | — | dB |
| Adjacent channel rejection, Interferer is reference signal, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² | ACR_{REF1} | Interferer is reference signal at +1 channel spacing | — | 39.9 | — | dB |
| | | Interferer is reference signal at -1 channel spacing | — | 39.2 | — | dB |
| Alternate channel rejection, interferer is reference signal, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² | ACR_{REF2} | Interferer is reference signal at +2 channel spacing | — | 51.1 | — | dB |
| | | Interferer is reference signal at -2 channel spacing | — | 51.6 | — | dB |
| Image rejection, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² | IR | Interferer is CW in image band ³ | — | 43.5 | — | dB |
| Blocking rejection of all other channels, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² , interferer is reference signal | BLOCK | Interferer frequency < desired frequency -3 channel spacing | — | 57.6 | — | dB |
| | | Interferer frequency > desired frequency +3 channel spacing | — | 57.5 | — | dB |
| RSSI resolution | RSSI_{RES} | -100 dBm to +5 dBm | — | 0.25 | — | dB |
| RSSI accuracy in the linear region as defined by 802.15.4-2020 | RSSI_{LIN} | | — | +/-6 | — | dB |

Note:

1. Reference signal is defined as O-QPSK DSSS per 802.15.4, Frequency range = 2400-2483.5 MHz, Symbol rate = 62.5 ksym-bols/s.
2. Reference sensitivity level is -85 dBm.
3. Due to low-IF frequency, there is some overlap of adjacent channel and image channel bands. Adjacent channel CW blocker tests place the Interferer center frequency at the Desired frequency ± 5 MHz on the channel raster, whereas the image rejection test places the CW interferer near the image frequency of the Desired signal carrier, regardless of the channel raster.

4.1.5.2.3 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.16. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-----------------------------|--|-----|-------|-----|------|
| Rx Max Strong Signal Input Level for 0.1% BER | RX_{SAT} | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | Signal is reference signal, 37 byte payload ¹ | — | -97.5 | — | dBm |
| | | With non-ideal signals ^{2 3} | — | -97.1 | — | dBm |
| Signal to co-channel interferer | C/I_{CC} | (see notes) ^{1 3} | — | +6.6 | — | dB |
| $N \pm 1$ Adjacent channel selectivity | C/I_1 | Interferer is reference signal at +1 MHz offset ^{1 4 3 5} | — | -8.3 | — | dB |
| | | Interferer is reference signal at -1 MHz offset ^{1 4 3 5} | — | -8.7 | — | dB |
| $N \pm 2$ Alternate channel selectivity | C/I_2 | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -42.1 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -48.9 | — | dB |
| $N \pm 3$ Alternate channel selectivity | C/I_3 | Interferer is reference signal at +3 MHz offset ^{1 4 3 5} | — | -42.4 | — | dB |
| | | Interferer is reference signal at -3 MHz offset ^{1 4 3 5} | — | -54.8 | — | dB |
| Selectivity to image frequency | C/I_{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -42.1 | — | dB |
| Selectivity to image frequency ± 1 MHz | $\text{C/I}_{\text{IM_1}}$ | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -42.4 | — | dB |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -8.3 | — | dB |
| Intermodulation performance | IM | $n = 3$ ⁶ | — | -23 | — | dBm |
| Note: | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | |
| 3. Desired signal -67 dBm. | | | | | | |
| 4. Desired frequency $2402\text{ MHz} \leq \text{Fc} \leq 2480\text{ MHz}$. | | | | | | |
| 5. With allowed exceptions. | | | | | | |
| 6. As specified in Bluetooth Core specification version 5.1, Vol 6, Part A, Section 4.4 | | | | | | |

4.1.5.2.4 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.17. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|-------|-----|------|
| Max usable receiver input level | SAT | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | Signal is reference signal, 37 byte payload ¹ | — | -94.4 | — | dBm |
| | | With non-ideal signals ^{2 3} | — | -94.3 | — | dBm |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | +6.0 | — | dB |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -8.0 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -8.8 | — | dB |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +4 MHz offset ^{1 4 3 5} | — | -42.2 | — | dB |
| | | Interferer is reference signal at -4 MHz offset ^{1 4 3 5} | — | -50.3 | — | dB |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +6 MHz offset ^{1 4 3 5} | — | -54.4 | — | dB |
| | | Interferer is reference signal at -6 MHz offset ^{1 4 3 5} | — | -55.4 | — | dB |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -8.0 | — | dB |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +2 MHz with 1 MHz precision ^{1 5} | — | -42.2 | — | dB |
| | | Interferer is reference signal at image frequency -2 MHz with 1 MHz precision ^{1 5} | — | +6.0 | — | dB |
| Intermodulation performance | IM | n = 3 ⁶ | — | -22.3 | — | dBm |
| Note: | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | |
| 3. Desired signal -67 dBm. | | | | | | |
| 4. Desired frequency 2404 MHz ≤ Fc ≤ 2478 MHz. | | | | | | |
| 5. With allowed exceptions. | | | | | | |
| 6. As specified in Bluetooth Core specification version 5.1, Vol 6, Part A, Section 4.4 | | | | | | |

4.1.5.2.5 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.18. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit | |
|--|---------------------|--|-----|--------|-----|------|--|
| Max usable receiver input level | SAT | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm | |
| Sensitivity | SENS | Signal is reference signal ¹ | — | -100.6 | — | dBm | |
| | | With non-ideal signals ^{2 1} | — | -100.0 | — | dBm | |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | +2.1 | — | dB | |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 4 3 5} | — | -9.0 | — | dB | |
| | | Interferer is reference signal at -1 MHz offset ^{1 4 3 5} | — | -9.5 | — | dB | |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -44.4 | — | dB | |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -51.9 | — | dB | |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 4 3 5} | — | -44.3 | — | dB | |
| | | Interferer is reference signal at -3 MHz offset ^{1 4 3 5} | — | -58.3 | — | dB | |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -44.4 | — | dB | |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -44.3 | — | dB | |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -9.0 | — | dB | |
| Note: | | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | | |
| 3. Desired signal -72 dBm. | | | | | | | |
| 4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz. | | | | | | | |
| 5. With allowed exceptions. | | | | | | | |

4.1.5.2.6 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.19. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit | |
|--|---------------------|--|-----|--------|-----|------|--|
| Max usable receiver input level | SAT | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm | |
| Sensitivity | SENS | Signal is reference signal ¹ | — | -104.9 | — | dBm | |
| | | With non-ideal signals ^{2 3} | — | -104.6 | — | dBm | |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | +0.8 | — | dB | |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 4 3 5} | — | -13.1 | — | dB | |
| | | Interferer is reference signal at -1 MHz offset ^{1 4 3 5} | — | -13.6 | — | dB | |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -49.5 | — | dB | |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -56.9 | — | dB | |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 4 3 5} | — | -47.0 | — | dB | |
| | | Interferer is reference signal at -3 MHz offset ^{1 4 3 5} | — | -63.1 | — | dB | |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -49.5 | — | dB | |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -47.0 | — | dB | |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -13.1 | — | dB | |
| Note: | | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | | |
| 3. Desired signal -79 dBm. | | | | | | | |
| 4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz. | | | | | | | |
| 5. With allowed exceptions. | | | | | | | |

4.1.6 Flash Characteristics

Table 4.20. Flash Characteristics

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|----------------------|---------------------------------|--------|------|------|--------|
| Flash erase cycles before failure ¹ | EC _{FLASH} | T _A ≤ 125 °C | 10,000 | — | — | cycles |
| Flash data retention ¹ | RET _{FLASH} | T _A ≤ 125 °C | 10 | — | — | years |
| Program Time | t _{PROG} | one word (32-bits) | 40.2 | 44.0 | 47.9 | μs |
| | | average per word over 128 words | 9.97 | 10.9 | 11.9 | μs |
| Page Erase Time ² | t _{PERASE} | | 11.6 | 12.7 | 13.9 | ms |
| Mass Erase Time ^{3 4} | t _{MERASE} | | 11.7 | 12.8 | 14.1 | ms |
| Page Erase Current | I _{ERASE} | T _A = 25 °C | — | — | 2.13 | mA |
| Program Current | I _{WRITE} | T _A = 25 °C | — | — | 2.73 | mA |
| Mass Erase Current | I _{MERASE} | T _A = 25 °C | — | — | 2.30 | mA |
| Flash Supply voltage during write or erase | V _{FLASH} | | 1.71 | — | 3.8 | V |

Note:

1. Flash data retention information is published in the Quarterly Quality and Reliability Report.
2. Page Erase time is measured from setting the ERASEPAGE bit in the MSC_WRITECMD register until the BUSY bit in the MSC-STATUS register is cleared to 0. Internal set-up and hold times are included.
3. Mass Erase is issued by the CPU and erases all of User space.
4. Mass Erase time is measured from setting the ERASEMAIN0 bit in the MSC_WRITECMD register until the BUSY bit in the MSC-STATUS register is cleared to 0. Internal set-up and hold times are included.

4.1.7 Energy Mode Wake-up and Entry Times

Unless otherwise specified, these times are measured using the HFRCO at 19 MHz.

Table 4.21. Energy Mode Wake-up and Entry Times

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------|----------------------|------------------------------------|-----|------|-----|-------|
| Wake-up Time from EM1 | t _{EM1_WU} | Code execution from flash | — | 3 | — | HCLKs |
| | | Code execution from RAM | — | 1.43 | — | μs |
| Wake-up Time from EM2 | t _{EM2_WU} | Code execution from flash | — | 12.2 | — | μs |
| | | Code execution from RAM | — | 3.92 | — | μs |
| | | Code execution from flash @ 80 MHz | — | 9.00 | — | μs |
| | | Code execution from RAM @ 80 MHz | — | 2.87 | — | μs |
| Wake-up Time from EM3 | t _{EM3_WU} | Code execution from flash | — | 12.2 | — | μs |
| | | Code execution from RAM | — | 3.92 | — | μs |
| | | Code execution from flash @ 80 MHz | — | 9.00 | — | μs |
| | | Code execution from RAM @ 80 MHz | — | 2.87 | — | μs |
| Wake-up Time from EM4 | t _{EM4_WU} | Code execution from Flash | — | 17.8 | — | ms |
| Entry time to EM1 | t _{EM1_ENT} | Code execution from flash | — | 1.52 | — | μs |
| Entry time to EM2 | t _{EM2_ENT} | Code execution from flash | — | 74.0 | — | μs |
| Entry time to EM3 | t _{EM3_ENT} | Code execution from flash | — | 74.0 | — | μs |
| Entry time to EM4 | t _{EM4_ENT} | Code execution from flash | — | 84.1 | — | μs |

4.1.8 Oscillators

4.1.8.1 High Frequency Crystal Oscillator

Unless otherwise indicated, typical conditions are: AVDD = DVDD = RFVDD = 3.0 V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation, operating supply voltage range, and operating temperature range.

Table 4.22. High Frequency Crystal Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------------------------|---|-----|------|-----|------|
| Crystal Frequency | F _{HFXO} | see note ^{1 2} | — | 38.4 | — | MHz |
| Supported crystal equivalent series resistance (ESR) | ESR _{HFXO_38M4} | 38.4 MHz, C _L = 10 pF ³ | — | — | 40 | Ω |
| Supported range of crystal load capacitance | C _{HFXO_LC} | 38.4 MHz, ESR = 40 ⁴ | — | 10 | — | pF |
| Supply Current | I _{HFXO} | | — | 500 | — | μA |
| Startup Time ⁵ | T _{STARTUP} | 38.4 MHz, ESR = 40 Ω, C _L = 10 pF | — | 160 | — | μs |
| On-chip tuning cap step size ⁶ | SS _{HFXO} | | — | 0.04 | — | pF |

Note:

1. The BLE radio requires a 38.4 MHz crystal with a tolerance of ± 50 ppm over temperature and aging. Please use a crystal with the recommended frequency and tolerance.
2. The ZigBee radio requires a 38.4 MHz crystal with a tolerance of ± 40 ppm over temperature and aging. Please use a crystal with the recommended frequency and tolerance.
3. The crystal should have a maximum ESR less than or equal to this maximum rating.
4. It is recommended to use a crystal with a 10 pF load capacitance rating. Only crystals with a 10 pF load cap rating have been characterized for RF use.
5. Startup time does not include time implemented by programmable TIMEOUTSTEADY delay.
6. The tuning step size is the effective step size when incrementing both of the tuning capacitors by one count. The step size for the each of the individual tuning capacitors is twice this value.

4.1.8.2 Low Frequency Crystal Oscillator

Table 4.23. Low Frequency Crystal Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-----------------|---|------|--------|------|------|
| Crystal Frequency | F_{LFXO} | | — | 32.768 | — | kHz |
| Supported Crystal equivalent series resistance (ESR) | ESR_{LFXO} | GAIN = 0 | — | — | 80 | kΩ |
| | | GAIN = 1 to 3 | — | — | 100 | kΩ |
| Supported range of crystal load capacitance ¹ | C_{L_LFXO} | GAIN = 0 | 4 | — | 6 | pF |
| | | GAIN = 1 | 6 | — | 10 | pF |
| | | GAIN = 2 (see note ²) | 10 | — | 12.5 | pF |
| | | GAIN = 3 (see note ²) | 12.5 | — | 18 | pF |
| Current consumption | I_{CL12p5} | ESR = 70 kΩ, C_L = 12.5 pF, GAIN ³ = 2, AGC ⁴ = 1 | — | 357 | — | nA |
| Startup Time | $T_{STARTUP}$ | ESR = 70 kΩ, C_L = 7 pF, GAIN ³ = 1, AGC ⁴ = 1 | — | 63 | — | ms |
| On-chip tuning cap step size | SS_{LFXO} | | — | 0.26 | — | pF |
| On-chip tuning capacitor value at minimum setting ⁵ | C_{LFXO_MIN} | CAPTUNE = 0 | — | 4 | — | pF |
| On-chip tuning capacitor value at maximum setting ⁵ | C_{LFXO_MAX} | CAPTUNE = 0x4F | — | 24.5 | — | pF |
| Note: | | | | | | |
| 1. Total load capacitance seen by the crystal | | | | | | |
| 2. Crystals with a load capacitance of greater than 12 pF require external load capacitors. | | | | | | |
| 3. In LFXO_CAL Register | | | | | | |
| 4. In LFXO_CFG Register | | | | | | |
| 5. The effective load capacitance seen by the crystal will be $C_{LFXO}/2$. This is because each XTAL pin has a tuning cap and the two caps will be seen in series by the crystal | | | | | | |

4.1.8.3 High Frequency RC Oscillator (HFRCO)

Unless otherwise indicated, typical conditions are: AVDD = DVDD = 3.0 V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation, operating supply voltage range, and operating temperature range.

Table 4.24. High Frequency RC Oscillator (HFRCO)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------------------|---|-----|------|-----|--------|
| Frequency Accuracy | F _{HFRCO_ACC} | For all production calibrated frequencies | -3 | — | +3 | % |
| Current consumption on all supplies ¹ | I _{HFRCO} | F _{HFRCO} = 1 MHz | — | 27 | — | µA |
| | | F _{HFRCO} = 2 MHz | — | 27 | — | µA |
| | | F _{HFRCO} = 4 MHz | — | 27 | — | µA |
| | | F _{HFRCO} = 7 MHz | — | 59 | — | µA |
| | | F _{HFRCO} = 13 MHz | — | 77 | — | µA |
| | | F _{HFRCO} = 16 MHz | — | 87 | — | µA |
| | | F _{HFRCO} = 19 MHz | — | 90 | — | µA |
| | | F _{HFRCO} = 26 MHz | — | 116 | — | µA |
| | | F _{HFRCO} = 32 MHz | — | 139 | — | µA |
| | | F _{HFRCO} = 38 MHz ² | — | 170 | — | µA |
| | | F _{HFRCO} = 40 MHz ³ | — | 172 | — | µA |
| | | F _{HFRCO} = 48 MHz ² | — | 207 | — | µA |
| Clock Out current for HFRCODPLL ⁴ | I _{CLKOUT_HFRCOD} | FORCEEN bit of HFRCO0_CTRL = 1 | — | 3.0 | — | µA/MHz |
| | | | | | | |
| Clock Out current for HFRCOEM23 ⁴ | I _{CLKOUT_HFRCOE} | FORCEEN bit of HFRCOEM23_CTRL = 1 | — | 1.6 | — | µA/MHz |
| Coarse trim step Size (% of period) | SS _{HFRCO_COARSE} | Step size measured at coarse trim mid-scale. (Fine trim also set to mid scale.) | — | 0.64 | — | % |
| Fine trim step Size (% of period) | SS _{HFRCO_FINE} | Step size measured at fine trim mid-scale. (Coarse trim also set to mid scale.) | — | 0.1 | — | % |
| Period jitter | P _J _{HFRCO} | 19 MHz | — | 0.04 | — | % RMS |
| Startup Time ⁵ | T _{STARTUP} | FREQRANGE = 0 to 7 | — | 3.2 | — | µs |
| | | FREQRANGE = 8 to 15 | — | 1.2 | — | µs |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|------------------------------------|-------------------|----------------|------|-----|------|------|
| Band Frequency Limits ⁶ | f_{HFRCO_BAND} | FREQRANGE = 0 | 3.71 | — | 5.24 | MHz |
| | | FREQRANGE = 1 | 4.39 | — | 6.26 | MHz |
| | | FREQRANGE = 2 | 5.25 | — | 7.55 | MHz |
| | | FREQRANGE = 3 | 6.22 | — | 9.01 | MHz |
| | | FREQRANGE = 4 | 7.88 | — | 11.6 | MHz |
| | | FREQRANGE = 5 | 9.9 | — | 14.6 | MHz |
| | | FREQRANGE = 6 | 11.5 | — | 17.0 | MHz |
| | | FREQRANGE = 7 | 14.1 | — | 20.9 | MHz |
| | | FREQRANGE = 8 | 16.4 | — | 24.7 | MHz |
| | | FREQRANGE = 9 | 19.8 | — | 30.4 | MHz |
| | | FREQRANGE = 10 | 22.7 | — | 34.9 | MHz |
| | | FREQRANGE = 11 | 28.6 | — | 44.4 | MHz |
| | | FREQRANGE = 12 | 33.0 | — | 51.0 | MHz |
| | | FREQRANGE = 13 | 42.2 | — | 64.6 | MHz |
| | | FREQRANGE = 14 | 48.8 | — | 74.8 | MHz |
| | | FREQRANGE = 15 | 57.6 | — | 87.4 | MHz |

Note:

1. Does not include additional clock tree current. See specifications for additional current when selected as a clock source for a particular clock multiplexer.
2. This frequency is calibrated for the HFRCODPLL (HFRCO0) only.
3. This frequency is calibrated for the HFRCOEM23 only.
4. When the HFRCO is enabled for characterization using the FORCEEN bit, the total current will be the HFRCO core current plus the specified CLKOUT current. When the HFRCO is enabled on demand, the clock current may be different.
5. Hardware delay ensures settling to within $\pm 0.5\%$. Hardware also enforces this delay on a band change.
6. The frequency band limits represent the lowest and highest frequency which each band can achieve over the operating range.

4.1.8.4 Fast Start_Up RC Oscillator (FSRCO)**Table 4.25. Fast Start_Up RC Oscillator (FSRCO)**

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------|-------------|----------------|------|-----|------|------|
| FSRCO frequency | f_{FSRCO} | | 17.2 | 20 | 21.2 | MHz |

4.1.8.5 Low Frequency RC Oscillator

Table 4.26. Low Frequency RC Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|------------------|--------------------------------|--------|--------|--------|---------|
| Nominal oscillation frequency | F_{LFRCO} | | 31.785 | 32.768 | 33.751 | kHz |
| Frequency calibration step | F_{TRIM_STEP} | Typical trim step at mid-scale | — | 0.33 | — | % |
| Startup time | $T_{STARTUP}$ | | — | 220 | — | μs |
| Current consumption | I_{LFRCO} | | — | 186 | — | nA |

4.1.8.6 Ultra Low Frequency RC Oscillator

Table 4.27. Ultra Low Frequency RC Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------|--------------|----------------|-------|-----|-------|------|
| Oscillation Frequency | F_{ULFRCO} | | 0.944 | 1.0 | 1.095 | kHz |

4.1.9 GPIO Pins (3V GPIO pins)

Unless otherwise indicated, typical conditions are: AVDD = DVDD = IOVDD = 3.0 V.

Table 4.28. GPIO Pins (3V GPIO pins)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|------------------------|---|--------------|------|-------------|------|
| Leakage current | I _{LEAK_IO} | MODE _x = DISABLED, IOVDD = 1.71V | — | 1.9 | — | nA |
| | | MODE _x = DISABLED, IOVDD = 3.0 V | — | 2.5 | — | nA |
| | | MODE _x = DISABLED, IOVDD = 3.8 V T _A = 125 °C | — | — | 200 | nA |
| Input low voltage ¹ | V _{IL} | Any GPIO pin | — | — | 0.3 * IOVDD | V |
| | | RESET _n | — | — | 0.3 * DVDD | V |
| Input high voltage ¹ | V _{IH} | Any GPIO pin | 0.7 * IOVDD | — | — | V |
| | | RESET _n | 0.7 * DVDD | — | — | V |
| Hysteresis of input voltage | V _{HYS} | Any GPIO pin | 0.05 * IOVDD | — | — | V |
| | | RESET _n | 0.05 * DVDD | — | — | V |
| Output low voltage | V _{OL} | Sinking 20mA, IOVDD = 3.0 V | — | — | 0.2 * IOVDD | V |
| | | Sinking 8mA, IOVDD = 1.71 V | — | — | 0.4 * IOVDD | V |
| Output high voltage | V _{OH} | Sourcing 20mA, IOVDD = 3.0 V | 0.8 * IOVDD | — | — | V |
| | | Sourcing 8mA, IOVDD = 1.71 V | 0.6 * IOVDD | — | — | V |
| GPIO rise time | T _{GPIO_RISE} | IOVDD = 3.0V, C _{load} = 50pF, SLEWRATE = 4, 10% to 90% | — | 8.4 | — | ns |
| | | IOVDD = 1.7V, C _{load} = 50pF, SLEWRATE = 4, 10% to 90% | — | 13 | — | ns |
| GPIO fall time | T _{GPIO_FALL} | IOVDD = 3.0V, C _{load} = 50pF, SLEWRATE = 4, 90% to 10% | — | 7.1 | — | ns |
| | | IOVDD = 1.7V, C _{load} = 50pF, SLEWRATE = 4, 90% to 10% | — | 11.9 | — | ns |
| Pull up/down resistance ² | R _{PULL} | Any GPIO pin. Pull-up to IOVDD: MODE _n = DISABLE DOUT=1. Pull-down to VSS: MODE _n = WIREDORPULLDOWN DOUT = 0. | 35 | 44 | 55 | kΩ |
| | | RESET _n pin. Pull-up to DVDD | 35 | 44 | 55 | kΩ |
| Maximum filtered glitch width | T _{GFB} | MODE = INPUT, DOUT = 1 | — | 26 | — | ns |
| RESET _n low time to ensure pin reset | T _{RESET} | | 100 | — | — | ns |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------|----------------|-----|-----|-----|------|
| Note: | | | | | | |
| 1. GPIO input thresholds are proportional to the IOVDD pin. RESETn input thresholds are proportional to DVDD. 2. GPIO pull-ups connect to IOVDD supply, pull-downs connect to VSS. RESETn pull-up connects to DVDD. | | | | | | |

4.1.10 Analog to Digital Converter (ADC)

Unless otherwise indicated, typical conditions are: ADCCLK=10 MHz, OSR=2

Table 4.29. Analog to Digital Converter (ADC)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-----------------------------|--|------------------|-------------------------|-------------------|-------|
| Main analog supply | V _{AVDD} | Normal mode | 1.71 | — | 3.8 | V |
| Maximum Input Range ¹ | V _{IN_MAX} | Maximum allowable input voltage | 0 | — | V _{AVDD} | V |
| Full-Scale Voltage | V _{FS} | Voltage required for Full-Scale measurement | — | V _{REF} / Gain | — | V |
| Input Measurement Range | V _{IN} | Differential Mode - Plus and Minus inputs | -V _{FS} | — | +V _{FS} | V |
| | | Single Ended Mode - One input tied to ground | 0 | — | V _{FS} | V |
| Input Sampling Capacitance | C _S | Analog Gain = 1x | — | 1.8 | — | pF |
| | | Analog Gain = 2x | — | 3.6 | — | pF |
| | | Analog Gain = 4x | — | 7.2 | — | pF |
| | | Analog Gain = 0.5x | — | 0.9 | — | pF |
| ADC clock frequency | f _{ADC_CLK} | Normal mode, Gain = 1x or 0.5x | — | — | 10 | MHz |
| | | Normal mode, Gain = 2x | — | — | 5 | MHz |
| | | Normal mode, Gain = 3x or 4x | — | — | 2.5 | MHz |
| Throughput rate | f _{SAMPLE} | f _{ADC_CLK} = 10 MHz | — | — | 1 | Msps |
| Current from all supplies, Continuous operation | I _{ADC_CONTINUOUS} | 1 Msps, OSR=2, f _{ADC_CLK} = 10 MHz | — | 290 | 385 | µA |
| Current in Standby mode. ADC is not functional but can wake up in 1us. | I _{STBY} | Normal Mode | — | 16.3 | — | µA |
| ADC Startup Time | t _{startup} | From power down state | — | 5 | — | µs |
| | | From standby state | — | 1 | — | µs |
| ADC Resolution | Resolution | | — | 12 | — | bits |
| Differential Nonlinearity | DNL | Differential Input. (No missing codes) | -1 | +/- 0.25 | +1.5 | LSB12 |
| Integral Nonlinearity | INL | Differential Input. | -2.5 | +/- 0.65 | -+2.5 | LSB12 |
| Effective number of bits | ENOB | Differential Input. Gain=1x, f _{IN} = 10 kHz, Internal VREF=1.21V. | 10.5 | 11.18 | — | bits |
| Signal to Noise + Distortion Ratio Normal Mode | SNDR | Differential Input. Gain=1x, f _{IN} = 10 kHz, Internal VREF=1.21V | 65 | 69.1 | — | dB |
| | | Differential Input. Gain=2x, f _{IN} = 10 kHz, Internal VREF=1.21V | — | 68.8 | — | dB |
| | | Differential Input. Gain=4x, f _{IN} = 10 kHz, Internal VREF=1.21V | — | 66.9 | — | dB |
| | | Differential Input. Gain=0.5x, f _{IN} = 10 kHz, Internal VREF=1.21V | — | 69.2 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|--------|---|------|-------|------|-------|
| Total Harmonic Distortion | THD | Differential Input. Gain=1x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | — | -80.3 | -70 | dB |
| Spurious-Free Dynamic Range | SFDR | Differential Input. Gain=1x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | 72 | 86.5 | — | dB |
| Common Mode Rejection Ratio | CMRR | Normal mode. DC to 100 Hz | — | 87.0 | — | dB |
| | | Normal mode. AC (measured at 500 kHz) | — | 68.6 | — | dB |
| Power Supply Rejection Ratio | PSRR | DC to 100 Hz | — | 80.4 | — | dB |
| | | AC high frequency, using VREF_pad (measured at 500 kHz) | — | 33.4 | — | dB |
| | | AC high frequency, using internal VBGR (measured at 500 kHz) | — | 65.2 | — | dB |
| Gain Error, Normal mode | GE | GAIN = 1 and 0.5, using external VREF, direct mode, $f_{ADC_CLK} = 10$ MHz | -0.3 | 0.069 | 0.3 | % |
| | | GAIN = 2, using external VREF, direct mode, $f_{ADC_CLK} = 5$ MHz | -0.4 | 0.151 | 0.4 | % |
| | | GAIN = 3, using external VREF, direct mode, $f_{ADC_CLK} = 2.5$ MHz | -0.7 | 0.186 | 0.7 | % |
| | | GAIN = 4, using external VREF, direct mode, $f_{ADC_CLK} = 2.5$ MHz | -1.1 | 0.227 | 1.1 | % |
| | | Internal VREF, Gain=1 | — | 0.023 | — | % |
| Offset Error, Normal mode | OFFSET | GAIN = 1 and 0.5, Differential Input | -3 | 0.27 | 3 | LSB12 |
| | | GAIN = 2, Differential Input | -4 | 0.27 | 4 | LSB12 |
| | | GAIN = 3, Differential Input | -4 | 0.25 | 4 | LSB12 |
| | | GAIN = 4, Differential Input | -4 | 0.29 | 4 | LSB12 |
| External reference voltage range ¹ | VEVREF | | 1.0 | — | AVDD | V |
| Internal Reference voltage | VIREF | | — | 1.21 | — | V |

Note:

1. When inputs are routed to external GPIO pins, the maximum pin voltage is limited to the lower of the IOVDD and AVDD supplies.

4.1.11 Analog Comparator (ACMP)

Table 4.30. Analog Comparator (ACMP)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit | |
|--|------------------------|---|------|------|------|------|--|
| ACMP Supply current from AVDD pin | I _{ACMP} | BIAS = 4, HYST = DISABLED | — | 4.17 | — | µA | |
| | | BIAS = 5, HYST = DISABLED | — | 8.96 | — | µA | |
| | | BIAS = 6, HYST = DISABLED | — | 23.1 | — | µA | |
| | | BIAS = 7, HYST = DISABLED | — | 43.9 | 70 | µA | |
| ACMP Supply current from AVDD pin with Hysteresis | I _{ACMP_WHYS} | BIAS = 4, HYST = SYM30MV | — | 5.98 | — | µA | |
| | | BIAS = 5, HYST = SYM30MV | — | 13.0 | — | µA | |
| | | BIAS = 6, HYST = SYM30MV | — | 33.6 | — | µA | |
| | | BIAS = 7, HYST = SYM30MV | — | 64.2 | — | µA | |
| Comparator delay with 100 mV overdrive | T _{DELAY} | BIAS = 4 | — | 155 | — | ns | |
| | | BIAS = 5 | — | 86.6 | — | ns | |
| | | BIAS = 6 | — | 50.6 | — | ns | |
| | | BIAS = 7 | — | 39.9 | — | ns | |
| Input offset voltage | V _{OFFSET} | BIAS = 4, V _{CM} = 0.15 to AVDD - 0.15 V | -25 | — | +25 | mV | |
| | | BIAS = 7, V _{CM} = 0.15 to AVDD - 0.15 V | -30 | — | +30 | mV | |
| Input Range | V _{IN} | Input Voltage Range | 0 | — | AVDD | V | |
| Hysteresis (BIAS = 4) | V _{HYST_4} | HYST = SYM10MV ¹ | — | 21.2 | — | mV | |
| | | HYST = SYM20MV ¹ | — | 39.9 | — | mV | |
| | | HYST = SYM30MV ¹ | — | 57.6 | — | mV | |
| Reference Voltage | V _{ACMPREF} | Internal 1.25 V Reference | 1.19 | 1.25 | 1.31 | V | |
| | | Internal 2.5 V Reference | 2.34 | 2.5 | 2.75 | V | |
| Capacitive Sense Oscillator Resistance ² | R _{CSRESSEL} | CSRESSEL = 0 | — | 14 | — | kΩ | |
| | | CSRESSEL = 1 | — | 24 | — | kΩ | |
| | | CSRESSEL = 2 | — | 43 | — | kΩ | |
| | | CSRESSEL = 3 | — | 60 | — | kΩ | |
| | | CSRESSEL = 4 | — | 80 | — | kΩ | |
| | | CSRESSEL = 5 | — | 99 | — | kΩ | |
| | | CSRESSEL = 6 | — | 120 | — | kΩ | |
| Note: | | | | | | | |
| 1. V _{CM} = 1.25 V | | | | | | | |
| 2. Capacitive Sense has been deprecated and is not recommended for use | | | | | | | |

4.1.12 Temperature Sensor

Table 4.31. Temperature Sensor

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|--------------------|----------------|-----|------|-----|------|
| Temperature sensor range | T_{sense_range} | | -40 | — | 125 | °C |
| Temperature sensor resolution | $T_{senseRes}$ | | — | 0.25 | — | °C |

4.1.13 Brown Out Detectors

4.1.13.1 DVDD BOD

BOD thresholds on DVDD in EM0 and EM1 only, unless otherwise noted. Typical conditions are at $T_A = 25^\circ\text{C}$. Minimum and maximum values in this table represent the worst conditions across process variation, operating supply voltage range, and operating temperature range.

Table 4.32. DVDD BOD

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------|--------------------------------|---|------|------|------|---------------|
| BOD threshold | $V_{\text{DVDD_BOD}}$ | Supply Rising | — | 1.67 | 1.71 | V |
| | | Supply Falling | 1.62 | 1.65 | — | V |
| BOD response time | $t_{\text{DVDD_BOD_DE-LAY}}$ | Supply dropping at 100 mV/ μs slew rate ¹ | — | 0.95 | — | μs |
| BOD hysteresis | $V_{\text{DVDD_BOD_HYS-T}}$ | | — | 20 | — | mV |

Note:

1. If the supply slew rate exceeds the specified slew rate, the BOD may trip later than expected (at a threshold below the minimum specified threshold), or the BOD may not trip at all (e.g., if the supply ramps down and then back up at a very fast rate)

4.1.13.2 LE DVDD BOD

BOD thresholds on DVDD pin for low energy modes EM2 to EM4, unless otherwise noted.

Table 4.33. LE DVDD BOD

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------|-----------------------------------|---|-----|-----|------|---------------|
| BOD threshold | $V_{\text{DVDD_LE_BOD}}$ | Supply Falling | 1.5 | — | 1.71 | V |
| BOD response time | $t_{\text{DVDD_LE_BOD_DELAY}}$ | Supply dropping at 2 mV/ μs slew rate ¹ | — | 50 | — | μs |
| BOD hysteresis | $V_{\text{DVDD_LE_BOD_HYST}}$ | | — | 20 | — | mV |

Note:

1. If the supply slew rate exceeds the specified slew rate, the BOD may trip later than expected (at a threshold below the minimum specified threshold), or the BOD may not trip at all (e.g., if the supply ramps down and then back up at a very fast rate)

4.1.13.3 AVDD and VIO BODs

BOD thresholds for AVDD BOD and BOD for VIO supply or supplies. All energy modes.



Table 4.34. AVDD and VIO BODs

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------|------------------|---|------|-----|------|---------|
| BOD threshold | V_{BOD} | Supply falling | 1.45 | — | 1.71 | V |
| BOD response time | t_{BOD_DELAY} | Supply dropping at 2 mV/ μ s slew rate ¹ | — | 50 | — | μ s |
| BOD hysteresis | V_{BOD_HYST} | | — | 20 | — | mV |

Note:

1. If the supply slew rate exceeds the specified slew rate, the BOD may trip later than expected (at a threshold below the minimum specified threshold), or the BOD may not trip at all (e.g., if the supply ramps down and then back up at a very fast rate)

4.1.14 USART SPI Main Timing

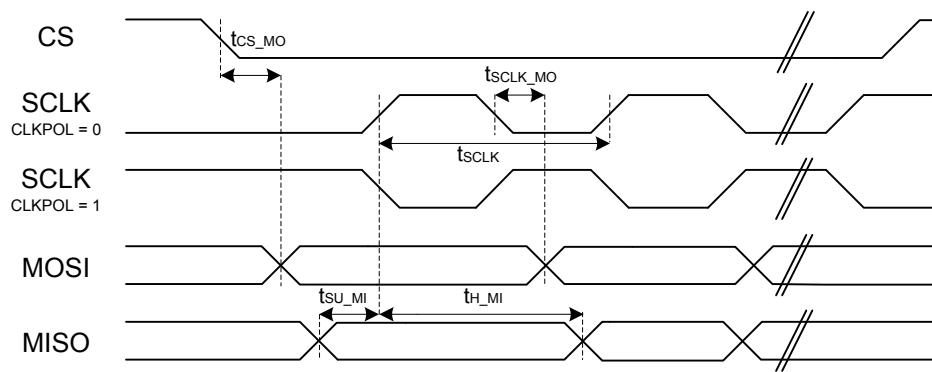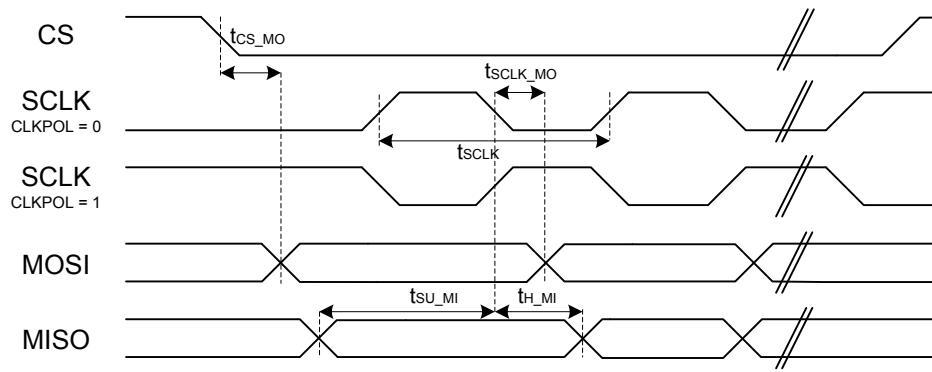Figure 4.1. SPI Main Timing ($\text{SMSDELAY} = 0$)Figure 4.2. SPI Main Timing ($\text{SMSDELAY} = 1$)

4.1.14.1 USART SPI Main Timing

Timing specifications are for all SPI signals routed to the same DBUS (DBUSAB or DBUSCD). All GPIO set to slew rate = 6.

Table 4.35. USART SPI Main Timing

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------|----------------|----------------|--------------|-----|------|------|
| SCLK period ^{1 2 3} | t_{SCLK} | | $2*t_{PCLK}$ | — | — | ns |
| CS to MOSI ^{1 2} | t_{CS_MO} | | -18.5 | — | 22.5 | ns |
| SCLK to MOSI ^{1 2} | t_{SCLK_MO} | | -13 | — | 11 | ns |
| MISO setup time ^{1 2} | t_{SU_MI} | IOVDD = 1.62 V | 44 | — | — | ns |
| | | IOVDD = 3.0 V | 34 | — | — | ns |
| MISO hold time ^{1 2} | t_{H_MI} | | -8.5 | — | — | ns |

Note:

1. Applies for both CLKPHA = 0 and CLKPHA = 1.
2. Measurement done with 8 pF output loading at 10% and 90% of the I/O supply.
3. t_{PCLK} is one period of the selected PCLK.

4.1.15 USART SPI Secondary Timing

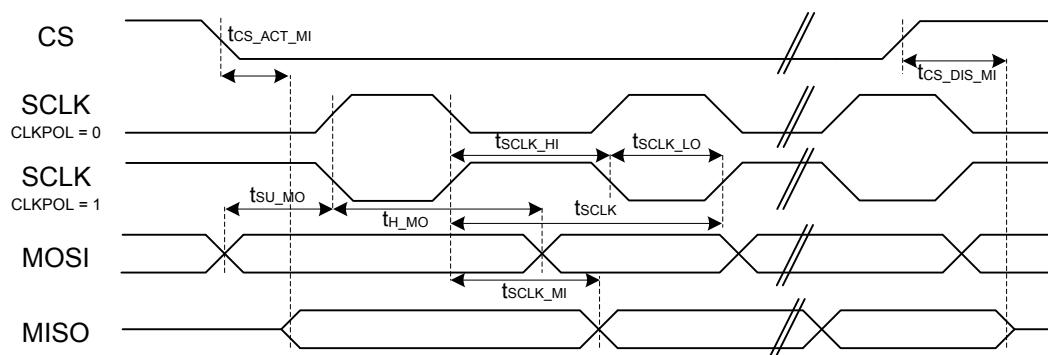


Figure 4.3. SPI Secondary Timing

4.1.15.1 USART SPI Secondary Timing

Timing specifications are for all SPI signals routed to the same DBUS (DBUSAB or DBUSCD). All GPIO set to slew rate = 6.

Table 4.36. USART SPI Secondary Timing

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------------------|-------------------|----------------|-----------------------|-----|---------------------|------|
| SCLK period ^{1 2 3} | t_{SCLK} | | $6*t_{PCLK}$ | — | — | ns |
| SCLK high time ^{1 2 3} | t_{SCLK_HI} | | $2.5*t_{PCLK}$ | — | — | ns |
| SCLK low time ^{1 2 3} | t_{SCLK_LO} | | $2.5*t_{PCLK}$ | — | — | ns |
| CS active to MISO ^{1 2} | $t_{CS_ACT_MI}$ | | 16 | — | 52.5 | ns |
| CS disable to MISO ^{1 2} | $t_{CS_DIS_MI}$ | | 15 | — | 46 | ns |
| MOSI setup time ^{1 2} | t_{SU_MO} | | 3.5 | — | — | ns |
| MOSI hold time ^{1 2 3} | t_{H_MO} | | 4.5 | — | — | ns |
| SCLK to MISO ^{1 2 3} | t_{SCLK_MI} | | $13.5 + 1.5*t_{PCLK}$ | — | $31 + 2.5*t_{PCLK}$ | ns |

Note:

1. Applies for both CLKPHA = 0 and CLKPHA = 1 (figure only shows CLKPHA = 0).
2. Measurement done with 8 pF output loading at 10% and 90% of the I/O supply (figure shows 50%).
3. t_{PCLK} is one period of the selected PCLK.

4.1.16 I2C Electrical Specifications

4.1.16.1 I2C Standard-mode (Sm)

CLHR set to 0 in the I2Cn_CTRL register.

Table 4.37. I2C Standard-mode (Sm)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------|----------------|-----|-----|-----|---------|
| SCL clock frequency ¹ | f_{SCL} | | 0 | — | 100 | kHz |
| SCL clock low time | t_{LOW} | | 4.7 | — | — | μs |
| SCL clock high time | t_{HIGH} | | 4 | — | — | μs |
| SDA set-up time | t_{SU_DAT} | | 250 | — | — | ns |
| SDA hold time | t_{HD_DAT} | | 0 | — | — | ns |
| Repeated START condition set-up time | t_{SU_STA} | | 4.7 | — | — | μs |
| Repeated START condition hold time | t_{HD_STA} | | 4.0 | — | — | μs |
| STOP condition set-up time | t_{SU_STO} | | 4.0 | — | — | μs |
| Bus free time between a STOP and START condition | t_{BUF} | | 4.7 | — | — | μs |

Note:

1. The maximum SCL clock frequency listed is assuming that an arbitrary clock frequency is available. The maximum attainable SCL clock frequency may be slightly less using the HFXO or HFRCO due to the limited frequencies available. The CLKDIV should be set to a value that keeps the SCL clock frequency below the max value listed.

4.1.16.2 I2C Fast-mode (Fm)

CLHR set to 1 in the I2Cn_CTRL register.

Table 4.38. I2C Fast-mode (Fm)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------|----------------|-----|-----|-----|---------|
| SCL clock frequency ¹ | f_{SCL} | | 0 | — | 400 | kHz |
| SCL clock low time | t_{LOW} | | 1.3 | — | — | μs |
| SCL clock high time | t_{HIGH} | | 0.6 | — | — | μs |
| SDA set-up time | t_{SU_DAT} | | 100 | — | — | ns |
| SDA hold time | t_{HD_DAT} | | 0 | — | — | ns |
| Repeated START condition set-up time | t_{SU_STA} | | 0.6 | — | — | μs |
| Repeated START condition hold time | t_{HD_STA} | | 0.6 | — | — | μs |
| STOP condition set-up time | t_{SU_STO} | | 0.6 | — | — | μs |
| Bus free time between a STOP and START condition | t_{BUF} | | 1.3 | — | — | μs |

Note:

1. The maximum SCL clock frequency listed is assuming that an arbitrary clock frequency is available. The maximum attainable SCL clock frequency may be slightly less using the HFXO or HFRCO due to the limited frequencies available. The CLKDIV should be set to a value that keeps the SCL clock frequency below the max value listed.

4.1.16.3 I2C Fast-mode Plus (Fm+)

CLHR set to 1 in the I2Cn_CTRL register.

Table 4.39. I2C Fast-mode Plus (Fm+)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------|----------------|------|-----|------|---------|
| SCL clock frequency ¹ | f_{SCL} | | 0 | — | 1000 | kHz |
| SCL clock low time | t_{LOW} | | 0.5 | — | — | μs |
| SCL clock high time | t_{HIGH} | | 0.26 | — | — | μs |
| SDA set-up time | t_{SU_DAT} | | 50 | — | — | ns |
| SDA hold time | t_{HD_DAT} | | 0 | — | — | ns |
| Repeated START condition set-up time | t_{SU_STA} | | 0.26 | — | — | μs |
| Repeated START condition hold time | t_{HD_STA} | | 0.26 | — | — | μs |
| STOP condition set-up time | t_{SU_STO} | | 0.26 | — | — | μs |
| Bus free time between a STOP and START condition | t_{BUF} | | 0.5 | — | — | μs |

Note:

1. The maximum SCL clock frequency listed is assuming that an arbitrary clock frequency is available. The maximum attainable SCL clock frequency may be slightly less using the HFXO or HFRCO due to the limited frequencies available. The CLKDIV should be set to a value that keeps the SCL clock frequency below the max value listed.

4.1.17 Boot Timing

Secure boot impacts the recovery time from all sources of device reset. In addition to the root code authentication process, which cannot be disabled or bypassed, the root code can authenticate a bootloader, and the bootloader can authenticate the application. In projects that include only an application and no bootloader, the root code can authenticate the application directly. The duration of each authentication operation depends on two factors: the computation of the associated image hash, which is proportional to the size of the image, and the verification of the image signature, which is independent of image size.

The duration for the root code to authenticate the bootloader will depend on the SE firmware version as well as on the size of the bootloader.

The duration for the bootloader to authenticate the application can depend on the size of the application.

The configurations below assume that the associated bootloader and application code images do not contain a bootloader certificate or an application certificate. Authenticating a bootloader certificate or an application certificate will extend the boot time by an additional 6 to 7 ms.

The table below provides the durations from the termination of reset until the completion of the secure boot process (start of main() function in the application image) under various conditions.

Conditions:

- SE firmware version 1.2.13
- Gecko Bootloader size 9.9 KB

Timing is expected to be similar for subsequent SE firmware versions. Refer to SE firmware release notes for any significant changes.

Table 4.40. Boot Timing

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|-------------------|---|-----|------|-----|------|
| Boot time | t _{BOOT} | Secure boot application check disabled, second stage bootloader check enabled ¹ , 50 kB application size | — | 29.2 | — | ms |
| | | Secure boot application check enabled, second stage bootloader check enabled ¹ , 50 kB application size | — | 38.6 | — | ms |
| | | Secure boot application check enabled, second stage bootloader check enabled ¹ , 150 kB application size | — | 42.6 | — | ms |
| | | Secure boot application check enabled, second stage bootloader check enabled ¹ , 350 kB application size | — | 50.4 | — | ms |

Note:

1. Timing is measured with the specified bootloader size. Actual bootloader size will impact the boot timing slightly, with a similar μ s / kB ratio as application size.

4.1.18 Crypto Operation Timing for SE Manager API

Values in this table represent timing from SE Manager API call to return. The Cortex-M33 HCLK frequency is 38.4 MHz. The timing specifications below are measured at the SE Manager function call API. Each duration in the table contains some portion that is influenced by SE Manager build compilation and Cortex-M33 operating frequency and some portion that is influenced by the Hardware Secure Engine's firmware version and its operating speed (typically 80 MHz). The contributions of the Cortex-M33 properties to the overall specification timing are most pronounced for the shorter operations such as AES and hash when operating on small payloads. The overhead of command processing at the mailbox interface can also dominate the timing for shorter operations.

Conditions:

- SE firmware version 1.2.13
- GSDK version 4.1.0

Timing is expected to be similar for subsequent SE firmware versions. Refer to SE firmware release notes for any significant changes.

Table 4.41. Crypto Operation Timing for SE Manager API

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------------|-------------------------|---|-----|------|-----|------|
| AES-128 timing | t _{AES128} | AES-128 CCM encryption, PT 1 kB | — | 265 | — | μs |
| | | AES-128 CCM encryption, PT 32 kB | — | 1450 | — | μs |
| | | AES-128 CTR encryption, PT 1 kB | — | 231 | — | μs |
| | | AES-128 CTR encryption, PT 32 kB | — | 798 | — | μs |
| | | AES-128 GCM encryption, PT 1 kB | — | 246 | — | μs |
| | | AES-128 GCM encryption, PT 32 kB | — | 810 | — | μs |
| AES-256 timing | t _{AES256} | AES-256 CCM encryption, PT 1 kB | — | 279 | — | μs |
| | | AES-256 CCM encryption, PT 32 kB | — | 1880 | — | μs |
| | | AES-256 CTR encryption, PT 1 kB | — | 239 | — | μs |
| | | AES-256 CTR encryption, PT 32 kB | — | 1010 | — | μs |
| | | AES-256 GCM encryption, PT 1 kB | — | 255 | — | μs |
| | | AES-256 GCM encryption, PT 32 kB | — | 1030 | — | μs |
| ECC P-256 timing | t _{ECC_P256} | ECC key generation, P-256 | — | 5.5 | — | ms |
| | | ECC signing, P-256 | — | 5.7 | — | ms |
| | | ECC verification, P-256 | — | 6.1 | — | ms |
| ECC P-521 timing ¹ | t _{ECC_P521} | ECC key generation, P-521 | — | 29.7 | — | ms |
| | | ECC signing, P-521 | — | 30.8 | — | ms |
| | | ECC verification, P-521 | — | 37.2 | — | ms |
| ECC P-25519 timing ² | t _{ECC_P25519} | ECC key generation, P-25519 | — | 4.3 | — | ms |
| | | ECC signing, P-25519 | — | 4.4 | — | ms |
| | | ECC verification, P-25519 | — | 6.0 | — | ms |
| ECDH compute secret timing | t _{ECDH} | ECDH compute secret, P-521 ¹ | — | 29.5 | — | ms |
| | | ECDH compute secret, P-25519 ² | — | 4.2 | — | ms |
| | | ECDH compute secret, P-256 | — | 5.4 | — | ms |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|------------------------|--------------------------------|-----|------|-----|------|
| ECJPAKE client timing | t _{ECJPAKE_C} | ECJPAKE client write round one | — | 21.4 | — | ms |
| | | ECJPAKE client read round one | — | 14.3 | — | ms |
| | | ECJPAKE client write round two | — | 16.2 | — | ms |
| | | ECJPAKE client read round two | — | 7.6 | — | ms |
| | | ECJPAKE client derive secret | — | 10.5 | — | ms |
| ECJPAKE server timing | t _{ECJPAKE_S} | ECJPAKE server write round one | — | 21.4 | — | ms |
| | | ECJPAKE server read round one | — | 14.3 | — | ms |
| | | ECJPAKE server write round two | — | 16.3 | — | ms |
| | | ECJPAKE server read round two | — | 7.6 | — | ms |
| | | ECJPAKE server derive secret | — | 10.5 | — | ms |
| POLY-1305 timing ¹ | t _{POLY1305} | POLY-1305, PT 1 kB | — | 212 | — | μs |
| | | POLY-1305, PT 32 kB | — | 1070 | — | μs |
| SHA-256 timing | t _{SHA256} | SHA-256, PT 1 kB | — | 251 | — | μs |
| | | SHA-256, PT 32 kB | — | 677 | — | μs |
| SHA-512 timing ¹ | t _{SHA512} | SHA-512, PT 1 kB | — | 251 | — | μs |
| | | SHA-512, PT 32 kB | — | 566 | — | μs |

Note:

1. Option is only available on OPNs with Secure Vault High feature set.
2. Option is not available on Secure Vault Mid devices with SE firmware earlier than v1.2.10.

4.1.19 Crypto Operation Average Current for SE Manager API

Values in this table represent current consumed by security core during the operation, and represent additions to the current consumed by the Cortex-M33 application CPU due to the Hardware Secure Engine CPU and its associated crypto accelerators. The current measurements below represent the average value of the current for the duration of the crypto operation. Instantaneous peak currents may be higher.

Conditions:

- SE firmware version 1.2.13
- GSDK version 4.1.0

Current consumption is expected to be similar for subsequent SE firmware versions. Refer to SE firmware release notes for any significant changes.

Table 4.42. Crypto Operation Average Current for SE Manager API

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|----------------------------------|-----------------|---|-----|-----|-----|------|
| AES-128 current | I_{AES128} | AES-128 CCM encryption, PT 1 kB | — | 5.0 | — | mA |
| | | AES-128 CCM encryption, PT 32 kB | — | 8.8 | — | mA |
| | | AES-128 CTR encryption, PT 1 kB | — | 4.5 | — | mA |
| | | AES-128 CTR encryption, PT 32 kB | — | 8.8 | — | mA |
| | | AES-128 GCM encryption, PT 1 kB | — | 4.7 | — | mA |
| | | AES-128 GCM encryption, PT 32 kB | — | 9.0 | — | mA |
| AES-256 current | I_{AES256} | AES-256 CCM encryption, PT 1 kB | — | 5.2 | — | mA |
| | | AES-256 CCM encryption, PT 32 kB | — | 8.8 | — | mA |
| | | AES-256 CTR encryption, PT 1 kB | — | 4.7 | — | mA |
| | | AES-256 CTR encryption, PT 32 kB | — | 8.8 | — | mA |
| | | AES-256 GCM encryption, PT 1 kB | — | 4.8 | — | mA |
| | | AES-256 GCM encryption, PT 32 kB | — | 9.0 | — | mA |
| ECC P-256 current | $I_{ECCP256}$ | ECC key generation, P-256 | — | 6.6 | — | mA |
| | | ECC signing, P-256 | — | 6.6 | — | mA |
| | | ECC verification, P-256 | — | 6.5 | — | mA |
| ECC P-521 current ¹ | $I_{ECCP521}$ | ECC key generation, P-521 | — | 6.7 | — | mA |
| | | ECC signing, P-521 | — | 6.7 | — | mA |
| | | ECC verification, P-521 | — | 6.7 | — | mA |
| ECC P-25519 current ² | $I_{ECCP25519}$ | ECC key generation, P-25519 | — | 6.5 | — | mA |
| | | ECC signing, P-25519 | — | 6.5 | — | mA |
| | | ECC verification, P-25519 | — | 6.5 | — | mA |
| ECDH compute secret current | I_{ECDH} | ECDH compute secret, P-521 ¹ | — | 6.7 | — | mA |
| | | ECDH compute secret, P-25519 ² | — | 6.4 | — | mA |
| | | ECDH compute secret, P-256 | — | 6.5 | — | mA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------|------------------------|--------------------------------|-----|-----|-----|------|
| ECJPAKE client current | I _{ECJPAKE_C} | ECJPAKE client write round one | — | 6.7 | — | mA |
| | | ECJPAKE client read round one | — | 6.6 | — | mA |
| | | ECJPAKE client write round two | — | 6.6 | — | mA |
| | | ECJPAKE client read round two | — | 6.5 | — | mA |
| | | ECJPAKE client derive secret | — | 6.6 | — | mA |
| ECJPAKE server current | I _{ECJPAKE_S} | ECJPAKE server write round one | — | 6.6 | — | mA |
| | | ECJPAKE server read round one | — | 6.6 | — | mA |
| | | ECJPAKE server write round two | — | 6.6 | — | mA |
| | | ECJPAKE server read round two | — | 6.5 | — | mA |
| | | ECJPAKE server derive secret | — | 6.5 | — | mA |
| POLY-1305 current ¹ | I _{POLY1305} | POLY-1305, PT 1 kB | — | 4.4 | — | mA |
| | | POLY-1305, PT 32 kB | — | 6.4 | — | mA |
| SHA-256 current | I _{SHA256} | SHA-256, PT 1 kB | — | 3.4 | — | mA |
| | | SHA-256, PT 32 kB | — | 6.6 | — | mA |
| SHA-512 current ¹ | I _{SHA512} | SHA-512, PT 1 kB | — | 3.4 | — | mA |
| | | SHA-512, PT 32 kB | — | 6.1 | — | mA |

Note:

1. Option is only available on OPNs with Secure Vault High feature set.
2. Option is not available on Secure Vault Mid devices with SE firmware earlier than v1.2.10.

4.2 Typical Performance Curves for Revision B

Typical performance curves indicate typical characterized performance under the stated conditions.

4.2.1 Supply Current

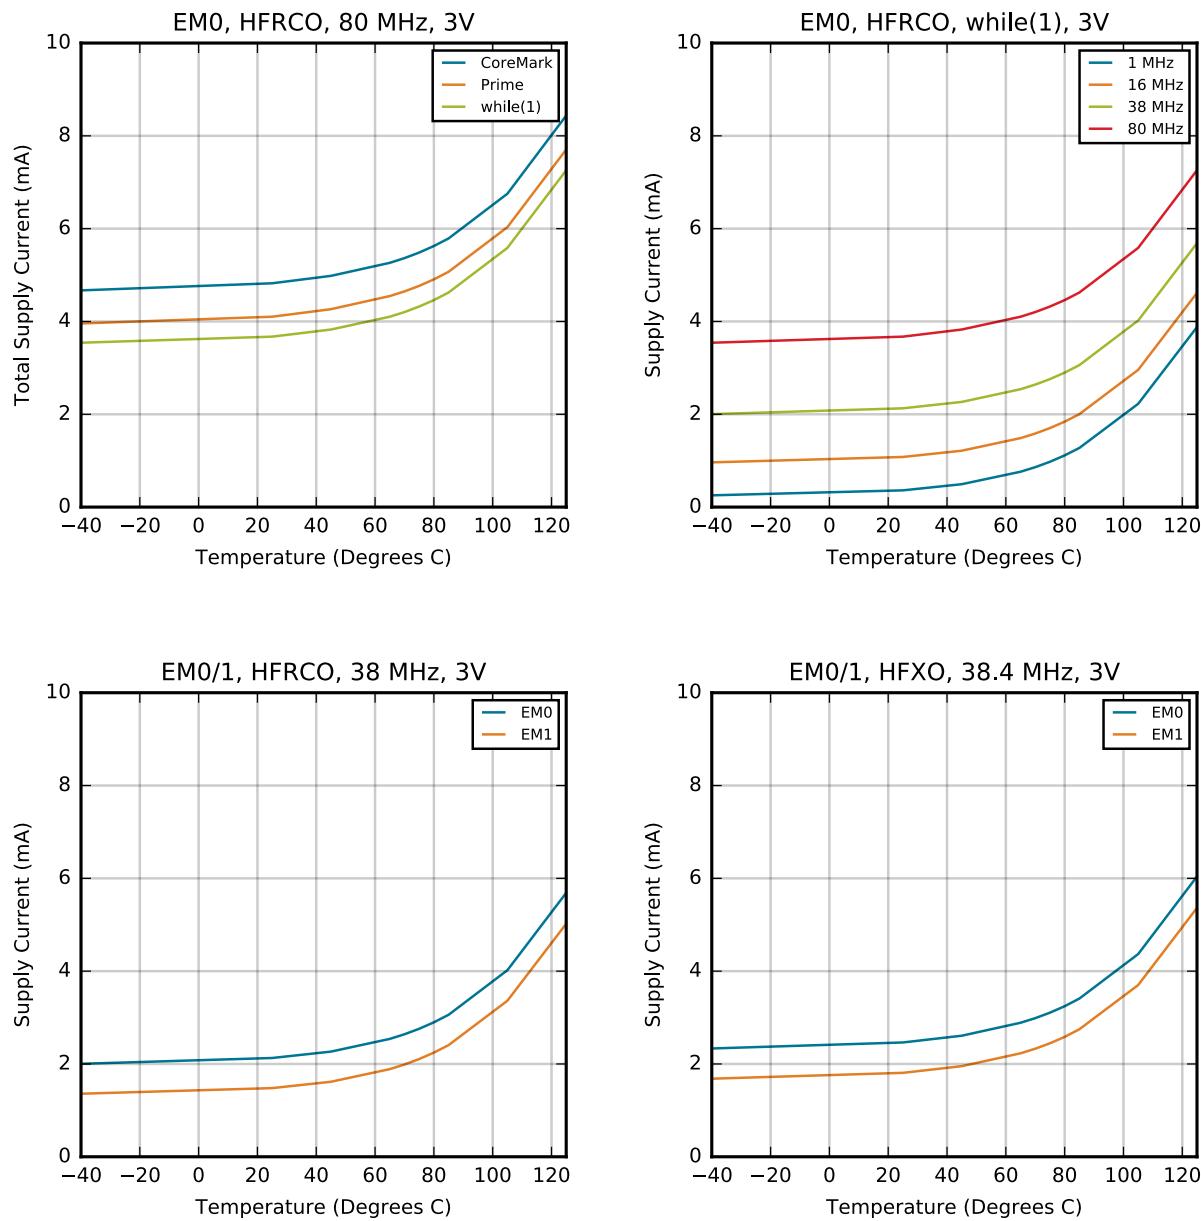


Figure 4.4. EM0 Active Mode Typical Supply Current vs. Temperature

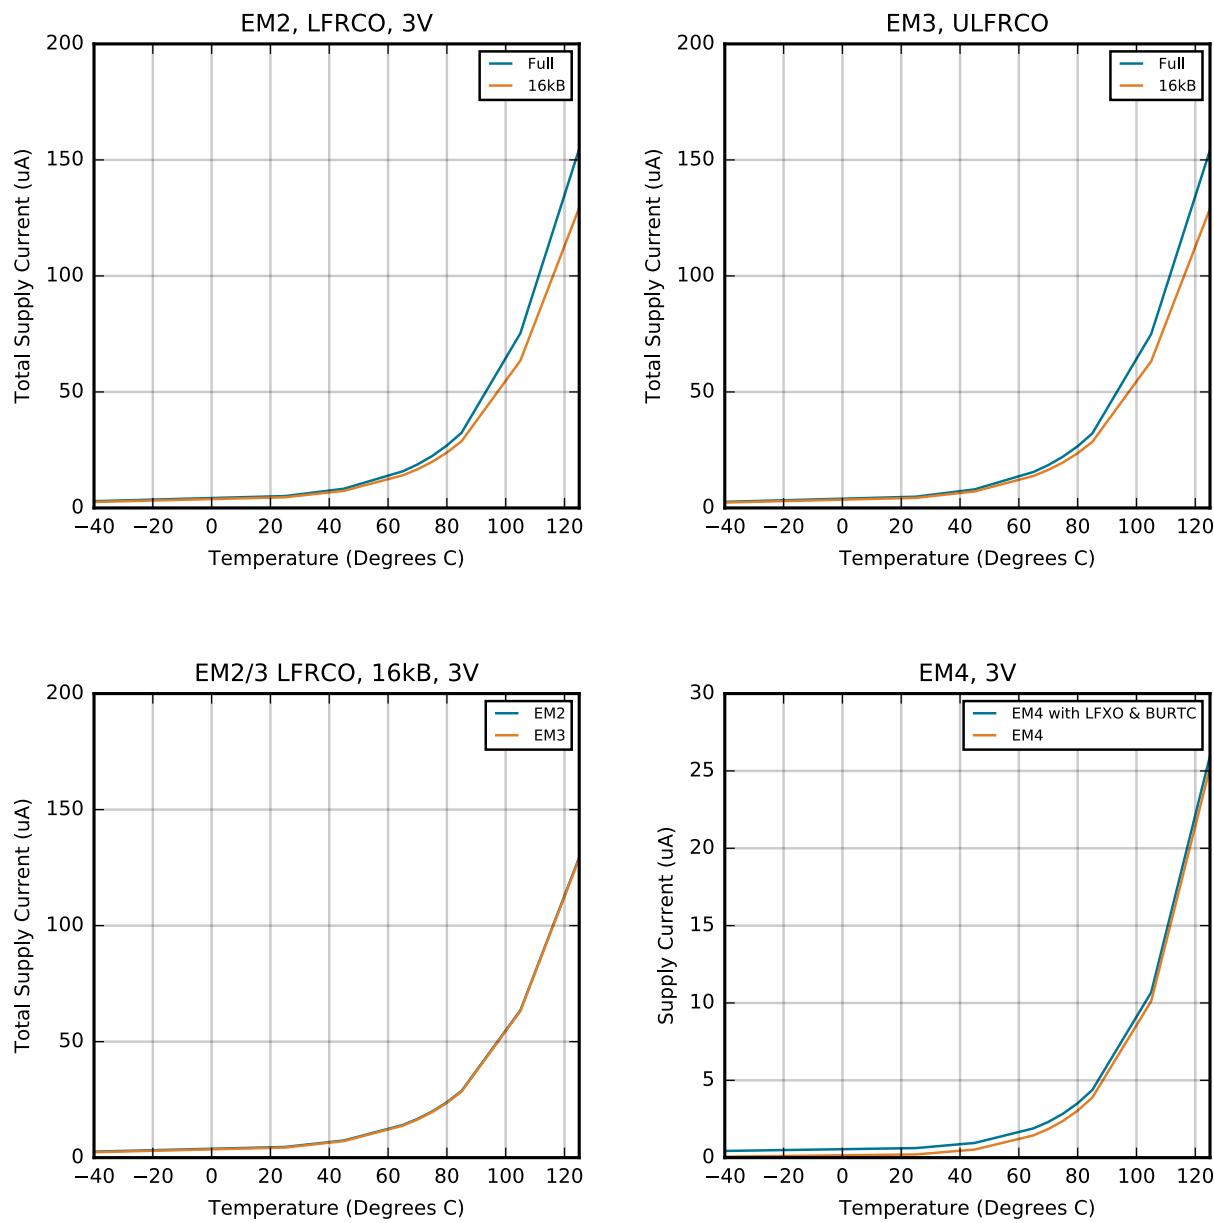


Figure 4.5. EM2, EM3, and EM4 Sleep Mode Typical Supply Current vs. Temperature

4.2.2 2.4 GHz Radio

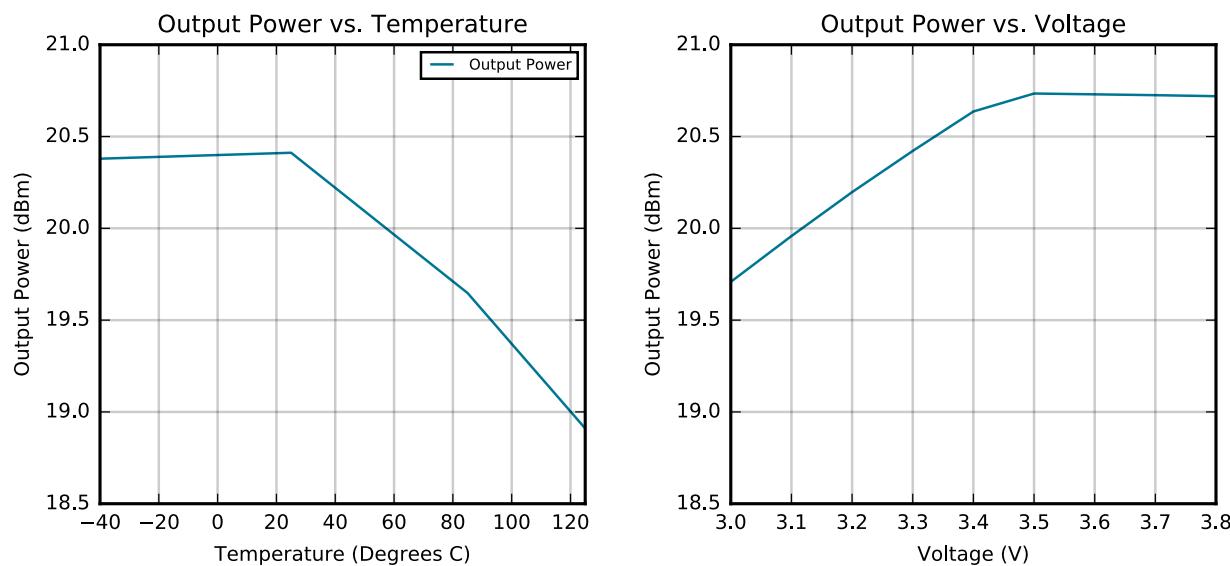


Figure 4.6. 2.4 GHz 20 dBm PA RF Transmitter Output Power

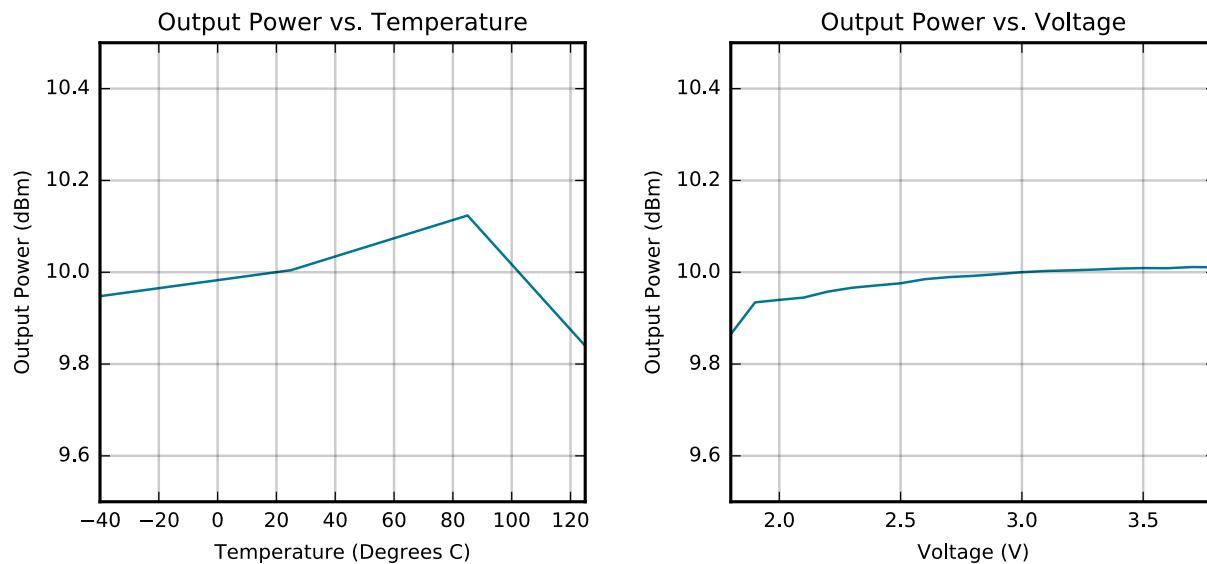


Figure 4.7. 2.4 GHz 10 dBm PA RF Transmitter Output Power

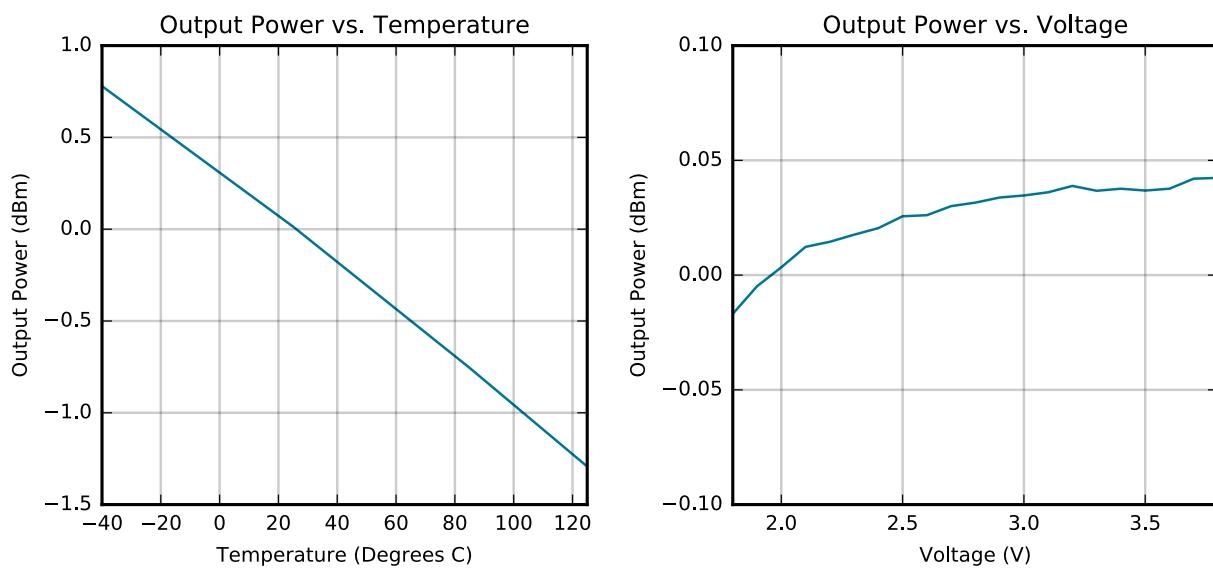


Figure 4.8. 2.4 GHz 0 dBm PA RF Transmitter Output Power

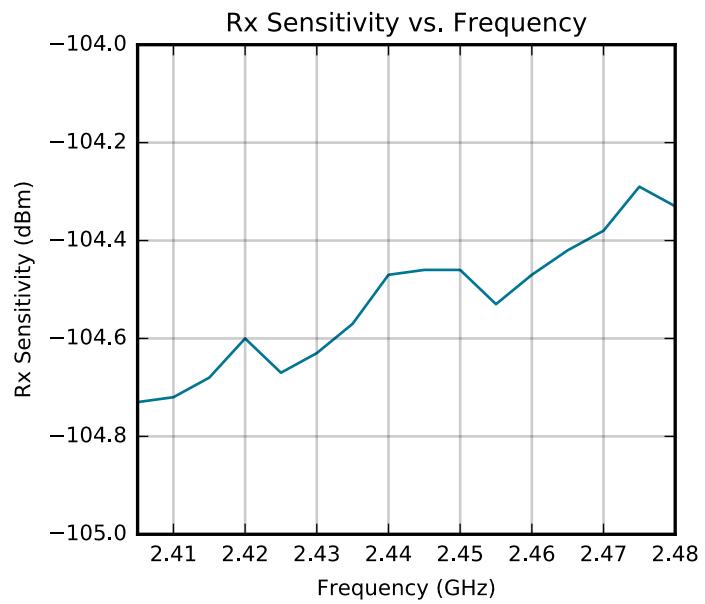


Figure 4.9. 2.4 GHz 802.15.4 RF Receiver Sensitivity

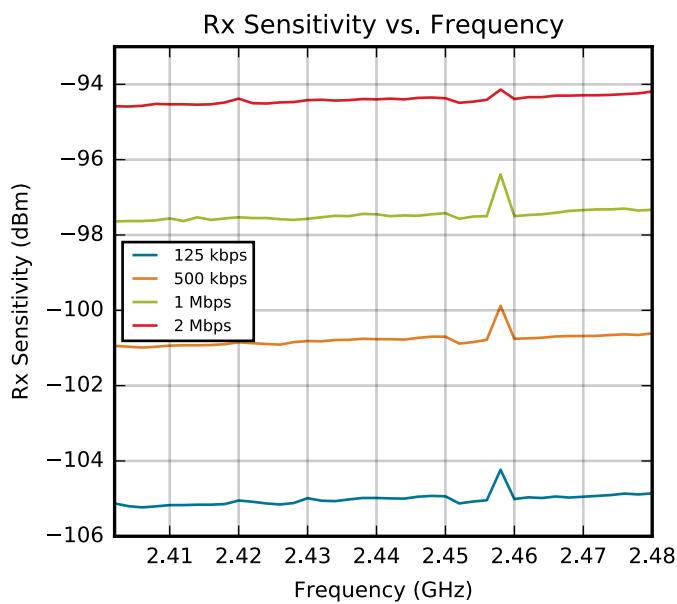


Figure 4.10. 2.4 GHz BLE RF Receiver Sensitivity

4.3 Electrical Characteristics for Revision D

All electrical parameters in all tables are specified under the following conditions, unless stated otherwise:

- Typical values are based on $T_A = 25^\circ\text{C}$ and all supplies at 3.0 V, by production test and/or technology characterization.
- Radio performance numbers are measured in conducted mode, based on Silicon Laboratories reference designs using output power-specific external RF impedance-matching networks for interfacing to a $50\ \Omega$ antenna.
- Minimum and maximum values represent the worst conditions across supply voltage, process variation, and operating temperature, unless stated otherwise.

Power Supply Pin Dependencies

Due to on-chip circuitry (e.g., diodes), some EFR32 power supply pins have a dependent relationship with one or more other power supply pins. These internal relationships between the external voltages applied to the various EFR32 supply pins are defined below. Exceeding the below constraints can result in damage to the device and/or increased current draw.

- DVDD \geq DECOUPLE
- PAVDD \geq RFVDD
- AVDD, IOVDD: No dependency with each other or any other supply pin. Additional leakage may occur if DVDD remains unpowered with power applied to these supplies.

4.3.1 Absolute Maximum Ratings

Stresses above those listed below may cause permanent damage to the device. This is a stress rating only and functional operation of the devices at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

Table 4.43. Absolute Maximum Ratings

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|------------------------|----------------|------|-----|--------------------------|-------------|
| Storage temperature range | T _{STG} | | -50 | — | +150 | °C |
| Junction temperature | T _{JMAX} | -I grade | — | — | +135 | °C |
| Voltage on any supply pin | V _{DDMAX} | | -0.3 | — | 3.8 | V |
| Voltage ramp rate on any supply pin | V _{DDRAMPMAX} | | — | — | 1.0 | V / μ s |
| Voltage on HFXO pins | V _{HFXOPIN} | | -0.3 | — | 1.2 | V |
| DC voltage on any GPIO pin | V _{DIGPIN} | | -0.3 | — | V _{IOVDD} + 0.3 | V |
| DC voltage on RESETn pin ¹ | V _{RESETn} | | -0.3 | — | 3.8 | V |
| Input RF level on pins RF2G4_IO1 and RF2G4_IO2 | P _{RFMAX2G4} | | — | — | +10 | dBm |
| Absolute voltage on RF pins RF2G4_IOx | V _{MAX2G4} | | -0.3 | — | V _{PAVDD} | V |
| Total current into VDD power lines | I _{VDDMAX} | Source | — | — | 200 | mA |
| Total current into VSS ground lines | I _{VSSMAX} | Sink | — | — | 200 | mA |
| Current per I/O pin | I _{IOMAX} | Sink | — | — | 50 | mA |
| | | Source | — | — | 50 | mA |
| Current for all I/O pins | I _{IOMAX} | Sink | — | — | 200 | mA |
| | | Source | — | — | 200 | mA |

Note:

1. The RESETn pin has a pull-up device to the DVDD supply. For minimum leakage, RESETn should not exceed the voltage at DVDD.

4.3.2 General Operating Conditions

This table specifies the general operating temperature range and supply voltage range for all supplies. The minimum and maximum values of all other tables are specified over this operating range, unless otherwise noted.

Table 4.44. General Operating Conditions

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------|--|------|------|-------------|------|
| Operating ambient temperature range | T_A | -I temperature grade ¹ | -40 | — | +125 | ° C |
| DVDD supply voltage | V_{DVDD} | EM0/1 | 1.71 | 3.0 | 3.8 | V |
| | | EM2/3/4 ² | 1.71 | 3.0 | 3.8 | V |
| AVDD supply voltage | V_{AVDD} | | 1.71 | 3.0 | 3.8 | V |
| IOVDDx operating supply voltage (All IOVDD pins) | V_{IOVDDx} | | 1.71 | 3.0 | 3.8 | V |
| PAVDD operating supply voltage | V_{PAVDD} | | 1.71 | 3.0 | 3.8 | V |
| RFVDD operating supply voltage | V_{RFVDD} | | 1.71 | 3.0 | V_{PAVDD} | V |
| DECOUPLE output capacitor ³ | $C_{DECOUPLE}$ | | 0.75 | 1.0 | 2.75 | μF |
| HCLK and Core frequency | f_{HCLK} | MODE = WS1, RAMWSEN = 1 ⁴ | — | — | 80 | MHz |
| | | MODE = WS1, RAMWSEN = 0 ⁴ | — | — | 50 | MHz |
| | | MODE = WS0, RAMWSEN = 0 ⁴ | — | — | 39 | MHz |
| PCLK frequency | f_{PCLK} | | — | — | 50 | MHz |
| EM01 Group A clock frequency | $f_{EM01GRPACLK}$ | | — | — | 80 | MHz |
| HCLK Radio frequency ⁵ | $f_{HCLKRADIO}$ | | 38 | 38.4 | 40 | MHz |
| External Clock Input | f_{CLKIN} | VSCALE2 or VSCALE1, IOVDD \geq 2.7 V | — | — | 40 | MHz |
| DPLL Reference Clock | $f_{DPLLREFCLK}$ | VSCALE2 or VSCALE1 | — | — | 40 | MHz |

Note:

1. The device may operate continuously at the maximum allowable ambient T_A rating as long as the absolute maximum T_{JMAX} is not exceeded. For an application with significant power dissipation, the allowable T_A may be lower than the maximum T_A rating. $T_A = T_{JMAX} - (T_{\theta JA} \times \text{PowerDissipation})$. Refer to the Absolute Maximum Ratings table and the Thermal Characteristics table for T_{JMAX} and $T_{\theta JA}$.
2. The DVDD supply is monitored by the DVDD BOD in EM0/1 and the LE DVDD BOD in EM2/3/4.
3. The system designer should consult the characteristic specs of the capacitor used on DECOUPLE to ensure its capacitance value stays within the specified bounds across temperature and DC bias.
4. Flash wait states are set by the MODE field in the MSC_READCTRL register. RAM wait states are enabled by setting the RAMWSEN bit in the SYSYCFG_DMEM0RAMCTRL register.
5. The recommended radio crystal frequency is 38.4 MHz. Any crystal frequency other than 38.4 MHz is expressly not supported. The minimum and maximum HCLKRADIO frequency in this table represent the design limits, which are much wider than the typical crystal tolerance.

4.3.3 Thermal Characteristics

Table 4.45. Thermal Characteristics

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------------------------------|--|-----|------|-----|------|
| Thermal Resistance Junction to Ambient QFN32 (4x4mm) Package | THE-TA _{JA_QFN32_4X4} | 2-Layer PCB, Natural Convection ¹ | — | 94.3 | — | °C/W |
| | | 4-Layer PCB, Natural Convection ¹ | — | 35.4 | — | °C/W |
| Thermal Resistance Junction to Case QFN32 (4x4mm) Package | THE-TA _{JC_QFN32_4X4} | 2-Layer PCB, Natural Convection ¹ | — | 36.3 | — | °C/W |
| | | 4-Layer PCB, Natural Convection ¹ | — | 23.5 | — | °C/W |

Note:

1. Measured according to JEDEC standard JESD51-2A. Integrated Circuit Thermal Test Method Environmental Conditions - Natural Convection (Still Air).

4.3.4 Current Consumption

4.3.4.1 MCU Current Consumption at 1.8 V

Unless otherwise indicated, typical conditions are: AVDD = DVDD = RFVDD = PAVDD = 1.8V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation at TA = 25 °C.

Table 4.46. MCU Current Consumption at 1.8 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|---|-----|------|-----|--------|
| Current consumption in EM0 mode with all peripherals disabled ¹ | I _{ACTIVE} | 80 MHz HFRCO, CPU running Prime from flash | — | 50.9 | — | µA/MHz |
| | | 80 MHz HFRCO, CPU running while loop from flash | — | 45.5 | — | µA/MHz |
| | | 80 MHz HFRCO, CPU running CoreMark loop from flash | — | 59.7 | — | µA/MHz |
| | | 38.4 MHz crystal, CPU running while loop from flash | — | 63.6 | — | µA/MHz |
| | | 38 MHz HFRCO, CPU running while loop from flash | — | 55.5 | — | µA/MHz |
| | | 26 MHz HFRCO, CPU running while loop from flash | — | 59.1 | — | µA/MHz |
| | | 16 MHz HFRCO, CPU running while loop from flash | — | 67.0 | — | µA/MHz |
| | | 1 MHz HFRCO, CPU running while loop from flash | — | 360 | — | µA/MHz |
| Current consumption in EM1 mode with all peripherals disabled ¹ | I _{EM1} | 80 MHz HFRCO | — | 28.7 | — | µA/MHz |
| | | 38.4 MHz crystal | — | 46.7 | — | µA/MHz |
| | | 38 MHz HFRCO | — | 38.7 | — | µA/MHz |
| | | 26 MHz HFRCO | — | 42.2 | — | µA/MHz |
| | | 16 MHz HFRCO | — | 50.0 | — | µA/MHz |
| | | 1 MHz HFRCO | — | 343 | — | µA/MHz |
| Current consumption in EM2 mode | I _{EM2} | Full RAM retention and RTC running from LFXO | — | 5.0 | — | µA |
| | | Full RAM retention and RTC running from LFRCO | — | 5.0 | — | µA |
| | | 1 bank (16kB) RAM retention and RTC running from LFRCO | — | 4.5 | — | µA |
| Current consumption in EM3 mode | I _{EM3} | Full RAM retention and RTC running from ULFRCO | — | 4.7 | — | µA |
| | | 1 bank (16kB) RAM retention and RTC running from ULFRCO | — | 4.2 | — | µA |
| Current consumption in EM4 mode | I _{EM4} | No BURTC, no LF oscillator | — | 0.15 | — | µA |
| | | BURTC with LFXO | — | 0.51 | — | µA |
| Current consumption during reset | I _{RST} | Hard pin reset held | — | 120 | — | µA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-----------|----------------|-----|------|-----|---------|
| Current Consumption per retained 16kB RAM bank in EM2 | I_{RAM} | | — | 0.10 | — | μA |

Note:

1. The typical EM0/EM1 current measurement includes some current consumed by the security core for periodical housekeeping purposes. This does not include current consumed by user-triggered security operations, such as cryptographic calculations.

4.3.4.2 MCU Current Consumption at 3.0 V

Unless otherwise indicated, typical conditions are: AVDD = DVDD = RFVDD = PAVDD = 3.0 V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation at TA = 25 °C.

Table 4.47. MCU Current Consumption at 3.0 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|------|------|--------|
| Current consumption in EM0 mode with all peripherals disabled ¹ | I _{ACTIVE} | 80 MHz HFRCO, CPU running Prime from flash | — | 50.9 | — | µA/MHz |
| | | 80 MHz HFRCO, CPU running while loop from flash | — | 45.6 | 55.5 | µA/MHz |
| | | 80 MHz HFRCO, CPU running CoreMark loop from flash | — | 59.8 | — | µA/MHz |
| | | 38.4 MHz crystal, CPU running while loop from flash | — | 63.8 | — | µA/MHz |
| | | 38 MHz HFRCO, CPU running while loop from flash | — | 55.6 | 75.1 | µA/MHz |
| | | 26 MHz HFRCO, CPU running while loop from flash | — | 59.1 | — | µA/MHz |
| | | 16 MHz HFRCO, CPU running while loop from flash | — | 67.1 | — | µA/MHz |
| | | 1 MHz HFRCO, CPU running while loop from flash | — | 362 | 1018 | µA/MHz |
| Current consumption in EM1 mode with all peripherals disabled ¹ | I _{EM1} | 80 MHz HFRCO | — | 28.7 | 37.6 | µA/MHz |
| | | 38.4 MHz crystal | — | 46.9 | — | µA/MHz |
| | | 38 MHz HFRCO | — | 38.7 | 57.5 | µA/MHz |
| | | 26 MHz HFRCO | — | 42.2 | — | µA/MHz |
| | | 16 MHz HFRCO | — | 50.2 | — | µA/MHz |
| | | 1 MHz HFRCO | — | 345 | 994 | µA/MHz |
| Current consumption in EM2 mode | I _{EM2} | Full RAM retention and RTC running from LFXO | — | 5.1 | — | µA |
| | | Full RAM retention and RTC running from LFRCO | — | 5.0 | — | µA |
| | | 1 bank (16 kB) RAM retention and RTC running from LFRCO | — | 4.5 | 10.5 | µA |
| Current consumption in EM3 mode | I _{EM3} | Full RAM retention and RTC running from ULFRCO | — | 4.8 | 11.4 | µA |
| | | 1 bank (16 kB) RAM retention and RTC running from ULFRCO | — | 4.3 | — | µA |
| Current consumption in EM4 mode | I _{EM4} | No BURTC, no LF oscillator | — | 0.24 | — | µA |
| | | BURTC with LFXO | — | 0.56 | — | µA |
| Current consumption during reset | I _{RST} | Hard pin reset held | — | 160 | — | µA |
| Current consumption per retained 16kB RAM bank in EM2 | I _{RAM} | | — | 0.10 | — | µA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------|--------|--|-----|-----|-----|------|
| Note: | | | | | | |
| | | 1. The typical EM0/EM1 current measurement includes some current consumed by the security core for periodical housekeeping purposes. This does not include current consumed by user-triggered security operations, such as cryptographic calculations. | | | | |

4.3.4.3 Radio Current Consumption at 1.8 V

RF current consumption measured with MCU in EM1, HCLK = 38.4 MHz, and all MCU peripherals disabled. Unless otherwise indicated, typical conditions are: AVDD = DVDD = IOVDD = RFVDD = PAVDD = 1.8V. Minimum and maximum values in this table represent the worst conditions across process variation at $T_A = 25^\circ\text{C}$.

Table 4.48. Radio Current Consumption at 1.8 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|------------------|---|-----|------|-----|------|
| Current consumption in receive mode, active packet reception | I_{RX_ACTIVE} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.1 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 8.8 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.4 | — | mA |
| | | 802.15.4 receiving frame, $f = 2.4$ GHz | — | 9.4 | — | mA |
| Current consumption in receive mode, listening for packet | I_{RX_LISTEN} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.8 | — | mA |
| | | 802.15.4, $f = 2.4$ GHz | — | 9.2 | — | mA |
| Current consumption in transmit mode | I_{TX} | $f = 2.4$ GHz, CW, 0 dBm PA, 0 dBm output power | — | 9.9 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 0 dBm output power | — | 16.6 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 10 dBm output power | — | 34.9 | — | mA |

4.3.4.4 Radio Current Consumption at 3.0 V

RF current consumption measured with MCU in EM1, HCLK = 38.4 MHz, and all MCU peripherals disabled. Unless otherwise indicated, typical conditions are: AVDD = DVDD = IOVDD = RFVDD = PAVDD = 3.0V. Minimum and maximum values in this table represent the worst conditions across process variation at $T_A = 25^\circ\text{C}$.

Table 4.49. Radio Current Consumption at 3.0 V

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|------------------|--|-----|-------|-----|------|
| Current consumption in receive mode, active packet reception | I_{RX_ACTIVE} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.1 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 8.8 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.4 | — | mA |
| | | 802.15.4 receiving frame, $f = 2.4$ GHz | — | 9.5 | — | mA |
| Current consumption in receive mode, listening for packet | I_{RX_LISTEN} | 125 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.0 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4$ GHz | — | 9.8 | — | mA |
| | | 802.15.4, $f = 2.4$ GHz | — | 9.2 | — | mA |
| Current consumption in transmit mode | I_{TX} | $f = 2.4$ GHz, CW, 0 dBm PA, 0 dBm output power | — | 10.5 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 0 dBm output power | — | 16.7 | — | mA |
| | | $f = 2.4$ GHz, CW, 10 dBm PA, 10 dBm output power | — | 35.4 | — | mA |
| | | $f = 2.4$ GHz, CW, 20 dBm PA, 10 dBm output power, PAVDD = 3.0 V | — | 60.8 | — | mA |
| | | $f = 2.4$ GHz, CW, 20 dBm PA, 20 dBm output power, PAVDD = 3.3 V | — | 186.5 | — | mA |

4.3.5 2.4 GHz RF Transceiver Characteristics

4.3.5.1 RF Transmitter Characteristics

4.3.5.1.1 RF Transmitter General Characteristics for the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.50. RF Transmitter General Characteristics for the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-------------------------------|---|------|-------|--------|------|
| RF test frequency range | F_{RANGE} | | 2400 | — | 2483.5 | MHz |
| Maximum TX power ¹ | POUT_{MAX} | 20 dBm PA, $\text{PAVDD} = 3.3\text{ V}$ | — | +20 | — | dBm |
| Maximum TX power | $\text{POUT}_{\text{MAX10}}$ | 10 dBm PA | — | +10 | — | dBm |
| Maximum TX power | $\text{POUT}_{\text{MAX0}}$ | 0 dBm PA | — | +0 | — | dBm |
| Minimum active TX power | POUT_{MIN} | 20 dBm PA, $\text{PAVDD} = 3.3\text{ V}$ | — | -14.1 | — | dBm |
| | | 10 dBm PA | — | -13.3 | — | dBm |
| | | 0 dBm PA | — | -24.9 | — | dBm |
| Output power step size | $\text{POUT}_{\text{STEP}}$ | 0 dBm PA, -15 dBm < Output Power < -5 dBm | — | 1.5 | — | dB |
| | | 0 dBm PA, -5 dBm < Output Power < 0 dBm | — | 0.3 | — | dB |
| | | 10 dBm PA, -5 dBm < Output power < 0 dBm | — | 1.5 | — | dB |
| | | 10 dBm PA, 0 dBm < Output power < 10 dBm | — | 0.3 | — | dB |
| | | 20 dBm PA, 0 dBm < Output Power < 5 dBm | — | 0.7 | — | dB |
| | | 20 dBm PA, 5 dBm < output power < POUT_{MAX} | — | 0.5 | — | dB |
| Output power variation vs PAVDD supply voltage variation, frequency = 2450 MHz | $\text{POUT}_{\text{VAR_V}}$ | 20 dBm PA $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ output power with PAVDD voltage swept from 3.0V to 3.8V. | — | 0.9 | — | dB |
| | | 10 dbm PA output power with PAVDD voltage swept from 1.8 V to 3.0 V | — | 0.1 | — | dB |
| | | 0 dBm PA output power with PAVDD voltage swept from 1.8 V to 3.0 V | — | 0.1 | — | dB |
| Output power variation vs temperature, Frequency = 2450 MHz | $\text{POUT}_{\text{VAR_T}}$ | $\text{PAVDD} = 3.3\text{V}$ supply, 20 dBm PA at $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, (-40 to +125 $^\circ\text{C}$) | — | 2.1 | — | dB |
| | | 10 dBm PA at 10 dBm, (-40 to +125 $^\circ\text{C}$) | — | 1.2 | — | dB |
| | | 0 dBm PA at 0 dBm, (-40 to +125 $^\circ\text{C}$) | — | 3 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-----------------------------|--|-----|-----|-----|------|
| Output power variation vs RF frequency | POUT _{VAR_F} | 20 dBm PA, POUT _{MAX} , PAVDD = 3.3 V. | — | 0.2 | — | dB |
| | | 10 dBm PA, 10 dBm | — | 0.1 | — | dB |
| | | 0 dBm PA, 0 dBm | — | 0.2 | — | dB |
| Spurious emissions of harmonics in restricted bands per FCC Part 15.205/15.209 | SPUR _{HRM_FCC_R} | Continuous transmission of CW carrier. P _{out} = POUT _{MAX} . PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Continuous transmission of CW carrier, P _{out} = 10 dBm, Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| Spurious emissions of harmonics in non-restricted bands per FCC Part 15.247/15.35 | SPUR _{HRM_FCC_NRR} | Continuous transmission of CW carrier, P _{out} = POUT _{MAX} , PAVDD = 3.3V, Test Frequency = 2450 MHz. | — | -26 | — | dBc |
| | | Continuous transmission of CW carrier. P _{out} = 10 dBm. Test Frequency = 2450 MHz. | — | -26 | — | dBc |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|---------------------------|---|-----|-----|-----|------|
| Spurious emissions out-of-band (above 2.483 GHz or below 2.4 GHz) in restricted bands, per FCC part 15.205/15.209 | SPUR _{OOB_FCC_R} | Restricted bands 30-88 MHz, Continuous transmission of CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands 88 - 216 MHz, Continuous transmission of CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands 216 - 960 MHz, Continuous transmission of CW carrier, 20 dBm PA $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V. Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands >960 MHz, Continuous transmission of CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3V, Test Frequency = 2450 MHz. | — | -47 | — | dBm |
| | | Restricted bands 30-88 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| | | Restricted bands 88 - 216 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| | | Restricted bands 216 - 960 MHz, Continuous transmission of CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -47 | — | dBm |
| Spurious emissions per ETSI EN300.440 | SPUR _{ETSI440} | 1G-14G, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -36 | — | dBm |
| | | 47-74 MHz, 87.5-108 MHz, 174-230 MHz, 470-862 MHz, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -56 | — | dBm |
| | | 25-1000 MHz, excluding above frequencies. $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -42 | — | dBm |
| | | 1G-12.75 GHz, excluding bands listed above, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz. | — | -50 | — | dBm |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|----------------------------|---|-----|-----|-----|------|
| Spurious emissions out-of-band in non-restricted bands per FCC Part 15.247 | SPUR _{OOB_FCC_NR} | Frequencies above 2.483 GHz or below 2.4 GHz, continuous transmission CW carrier, 20 dBm PA, $P_{out} = P_{OUT_{MAX}}$, PAVDD = 3.3 V, Test Frequency = 2450 MHz | — | -26 | — | dBc |
| | | Frequencies above 2.483 GHz or below 2.4 GHz, continuous transmission CW carrier, $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -26 | — | dBc |
| Spurious emissions out-of-band, per ETSI 300.328 | SPUR _{ETSI328} | [2400-2BW to 2400-BW], [2483.5+BW to 2483.5+2BW], $P_{out} = 10$ dBm, Test Frequency = 2450 MHz | — | -26 | — | dBm |
| | | [2400-BW to 2400], [2483.5 to 2483.5+BW] $P_{out} = 10$ dBm, Test Frequency = 2450 MHz. | — | -16 | — | dB |

Note:

1. Supported transmit power levels are determined by the ordering part number (OPN). Transmit power ratings for all devices covered in this data sheet can be found in the Max TX Power column of the Ordering Information Table.

4.3.5.1.2 RF Transmitter Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.51. RF Transmitter Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-------------------------------|---|-----|-------|-----|----------------------------|
| Error vector magnitude per 802.15.4-2011 | EVM | Average across frequency, signal is DSSS-OQPSK reference packet, $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | 3.1 | — | % rms |
| | | Average across frequency, signal is DSSS-OQPSK reference packet, $P_{\text{out}} = 10\text{ dBm}$ | — | 3 | — | % rms |
| | | Average across frequency, signal is DSSS-OQPSK reference packet, $P_{\text{out}} = 0\text{ dBm}$ | — | 2.9 | — | % rms |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | Relative, at carrier $\pm 3.5\text{ MHz}$, $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | -52.9 | — | $\text{dBc}/100\text{kHz}$ |
| | | Relative, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 10\text{ dBm}$ | — | -53 | — | $\text{dBc}/100\text{kHz}$ |
| | | Relative, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 0\text{ dBm}$ | — | -53.4 | — | $\text{dBc}/100\text{kHz}$ |
| | | Absolute, at carrier $\pm 3.5\text{ MHz}$, $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | -43.3 | — | $\text{dBm}/100\text{kHz}$ |
| | | Absolute, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 10\text{ dBm}$ | — | -52.9 | — | $\text{dBm}/100\text{kHz}$ |
| | | Absolute, at carrier $\pm 3.5\text{ MHz}$, $P_{\text{out}} = 0\text{ dBm}$ | — | -63.5 | — | $\text{dBm}/100\text{kHz}$ |
| | | Per FCC part 15.247, $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = P_{\text{OUT}_{\text{MAX}}}$ | — | -3.9 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per FCC part 15.247, $P_{\text{out}} = 10\text{ dBm}$ | — | -13.2 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per FCC part 15.247, $P_{\text{out}} = 0\text{ dBm}$ | — | -23.2 | — | $\text{dBm}/3\text{kHz}$ |
| | | ETSI 300.328 $P_{\text{out}} = 10\text{ dBm}$ | — | 8.2 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | 99% BW at highest and lowest channels in band, $P_{\text{out}} = 10\text{ dBm}$ | — | 2.2 | — | MHz |
| | | 99% BW at highest and lowest channels in band, $P_{\text{out}} = 0\text{ dBm}$ | — | 2.2 | — | MHz |

4.3.5.1.3 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.52. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|-------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 784.6 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 783.6 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 785.3 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | -2.5 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | -11.9 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -21.8 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | 10 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -29.3 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -39.4 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -49.2 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -33.4 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -43.5 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -53 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.3.5.1.4 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.53. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|--------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 1410.3 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 1414.6 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 1415.4 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | -1.1 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | -9.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -19.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | +9.0 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 2.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 2.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Inband spurs at $\pm 4\text{ MHz}$ | — | -33.7 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 4\text{ MHz}$ | — | -43.6 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 4\text{ MHz}$ | — | -53.7 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 6\text{ MHz}$ | — | -39.2 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 6\text{ MHz}$ | — | -49.1 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 6\text{ MHz}$ | — | -59.2 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.3.5.1.5 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.54. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|-------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 723.3 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 721.7 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 723.2 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | +0.7 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | -8.8 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -18.7 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | +10 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -38.2 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -54.8 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -33.3 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -43.3 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -59.4 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.3.5.1.6 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.55. RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------------------|--|-----|-------|-----|--------------------------|
| Transmit 6 dB bandwidth | TXBW | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ | — | 648.5 | — | kHz |
| | | $P_{\text{out}} = 10\text{ dBm}$ | — | 648.1 | — | kHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ | — | 648.3 | — | kHz |
| Power spectral density limit | $\text{PSD}_{\text{LIMIT}}$ | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Per FCC part 15.247 | — | +13.1 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 10\text{ dBm}$, Per FCC part 15.247 at 10 dBm | — | +3.6 | — | $\text{dBm}/3\text{kHz}$ |
| | | $P_{\text{out}} = 0\text{ dBm}$, Per FCC part 15.247 at 0 dBm | — | -6.4 | — | $\text{dBm}/3\text{kHz}$ |
| | | Per ETSI 300.328 at 10 dBm/1 MHz | — | 9.9 | — | dBm |
| Occupied channel bandwidth per ETSI EN300.328 | $\text{OCP}_{\text{ETSI328}}$ | $P_{\text{out}} = 10\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| | | $P_{\text{out}} = 0\text{ dBm}$ 99% BW at highest and lowest channels in band | — | 1.1 | — | MHz |
| In-band spurious emissions, with allowed exceptions ¹ | SPUR_{INB} | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -27.9 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -37.8 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$, Inband spurs at $\pm 2\text{ MHz}$ | — | -54.4 | — | dBm |
| | | $\text{PAVDD} = 3.3\text{ V}$, $P_{\text{out}} = \text{POUT}_{\text{MAX}}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -33.3 | — | dBm |
| | | $P_{\text{out}} = 10\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -43.2 | — | dBm |
| | | $P_{\text{out}} = 0\text{ dBm}$ Inband spurs at $\pm 3\text{ MHz}$ | — | -59.4 | — | dBm |

Note:

1. Per Bluetooth Core_5.1, Vol.6 Part A, Section 3.2.2, exceptions are allowed in up to three bands of 1 MHz width, centered on a frequency which is an integer multiple of 1 MHz. These exceptions shall have an absolute value of -20 dBm or less.

4.3.5.2 RF Receiver Characteristics

4.3.5.2.1 RF Receiver General Characteristics for the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.56. RF Receiver General Characteristics for the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|--------------------------------|---|------|-------|--------|------|
| RF tuning frequency range | F_{RANGE} | | 2400 | — | 2483.5 | MHz |
| Receive mode maximum spurious emission | SPUR_{RX} | 30 MHz to 1 GHz | — | -54.8 | — | dBm |
| | | 1 GHz to 12 GHz | — | -57.1 | — | dBm |
| Max spurious emissions during active receive mode, per FCC Part 15.109(a) | $\text{SPUR}_{\text{RX_FCC}}$ | 216 MHz to 960 MHz, conducted measurement | — | -54.8 | — | dBm |
| | | Above 960 MHz, conducted measurement. | — | -77.3 | — | dBm |

4.3.5.2.2 RF Receiver Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.57. RF Receiver Characteristics for 802.15.4 DSSS-OQPSK in the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|----------------------------|--|-----|--------|-----|------|
| Rx Max Strong Signal Input Level for 1% PER | RX_{SAT} | Signal is reference signal ¹ , packet length is 20 octets | — | 10 | — | dBm |
| Sensitivity, 1% PER | SENS | Signal is reference signal, packet length is 20 octets | — | -104.3 | — | dBm |
| Co-channel interferer rejection, 1% PER | CCR | Desired signal 3 dB above sensitivity limit | — | -0.5 | — | dB |
| Adjacent channel rejection, Interferer is reference signal, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² | ACR_{REF1} | Interferer is reference signal at +1 channel spacing | — | 39.7 | — | dB |
| | | Interferer is reference signal at -1 channel spacing | — | 39.7 | — | dB |
| Alternate channel rejection, interferer is reference signal, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² | ACR_{REF2} | Interferer is reference signal at +2 channel spacing | — | 51 | — | dB |
| | | Interferer is reference signal at -2 channel spacing | — | 51.3 | — | dB |
| Image rejection, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² | IR | Interferer is CW in image band ³ | — | 47.8 | — | dB |
| Blocking rejection of all other channels, 1% PER, desired is reference signal at 3 dB above reference sensitivity level ² , interferer is reference signal | BLOCK | Interferer frequency < desired frequency -3 channel spacing | — | 57.3 | — | dB |
| | | Interferer frequency > desired frequency +3 channel spacing | — | 57.2 | — | dB |
| RSSI resolution | RSSI_{RES} | -100 dBm to +5 dBm | — | 0.25 | — | dB |
| RSSI accuracy in the linear region as defined by 802.15.4-2020 | RSSI_{LIN} | | — | +/-6 | — | dB |

Note:

1. Reference signal is defined as O-QPSK DSSS per 802.15.4, Frequency range = 2400-2483.5 MHz, Symbol rate = 62.5 ksym-bols/s.
2. Reference sensitivity level is -85 dBm.
3. Due to low-IF frequency, there is some overlap of adjacent channel and image channel bands. Adjacent channel CW blocker tests place the Interferer center frequency at the Desired frequency ± 5 MHz on the channel raster, whereas the image rejection test places the CW interferer near the image frequency of the Desired signal carrier, regardless of the channel raster.

4.3.5.2.3 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.58. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-----------------------------|--|-----|-------|-----|------|
| Rx Max Strong Signal Input Level for 0.1% BER | RX_{SAT} | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | Signal is reference signal, 37 byte payload ¹ | — | -97.1 | — | dBm |
| | | With non-ideal signals ^{2 3} | — | -96.8 | — | dBm |
| Signal to co-channel interferer | C/I_{CC} | (see notes) ^{1 3} | — | +7 | — | dB |
| $N \pm 1$ Adjacent channel selectivity | C/I_1 | Interferer is reference signal at +1 MHz offset ^{1 4 3 5} | — | -7.9 | — | dB |
| | | Interferer is reference signal at -1 MHz offset ^{1 4 3 5} | — | -7.9 | — | dB |
| $N \pm 2$ Alternate channel selectivity | C/I_2 | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -39.9 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -47.6 | — | dB |
| $N \pm 3$ Alternate channel selectivity | C/I_3 | Interferer is reference signal at +3 MHz offset ^{1 4 3 5} | — | -39.6 | — | dB |
| | | Interferer is reference signal at -3 MHz offset ^{1 4 3 5} | — | -53.2 | — | dB |
| Selectivity to image frequency | C/I_{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -39.9 | — | dB |
| Selectivity to image frequency ± 1 MHz | $\text{C/I}_{\text{IM_1}}$ | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -39.6 | — | dB |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -7.9 | — | dB |
| Intermodulation performance | IM | $n = 3$ ⁶ | — | -24.6 | — | dBm |
| Note: | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | |
| 3. Desired signal -67 dBm. | | | | | | |
| 4. Desired frequency $2402\text{ MHz} \leq \text{Fc} \leq 2480\text{ MHz}$. | | | | | | |
| 5. With allowed exceptions. | | | | | | |
| 6. As specified in Bluetooth Core specification version 5.1, Vol 6, Part A, Section 4.4 | | | | | | |

4.3.5.2.4 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.59. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|-------|-----|------|
| Max usable receiver input level | SAT | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | Signal is reference signal, 37 byte payload ¹ | — | -94 | — | dBm |
| | | With non-ideal signals ^{2 3} | — | -93.9 | — | dBm |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | +6.6 | — | dB |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -7.6 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -8.2 | — | dB |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +4 MHz offset ^{1 4 3 5} | — | -40.2 | — | dB |
| | | Interferer is reference signal at -4 MHz offset ^{1 4 3 5} | — | -49 | — | dB |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +6 MHz offset ^{1 4 3 5} | — | -52.9 | — | dB |
| | | Interferer is reference signal at -6 MHz offset ^{1 4 3 5} | — | -54 | — | dB |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -7.6 | — | dB |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +2 MHz with 1 MHz precision ^{1 5} | — | -40.2 | — | dB |
| | | Interferer is reference signal at image frequency -2 MHz with 1 MHz precision ^{1 5} | — | +6.6 | — | dB |
| Intermodulation performance | IM | n = 3 ⁶ | — | -17.1 | — | dBm |
| Note: | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | |
| 3. Desired signal -67 dBm. | | | | | | |
| 4. Desired frequency 2404 MHz ≤ Fc ≤ 2478 MHz. | | | | | | |
| 5. With allowed exceptions. | | | | | | |
| 6. As specified in Bluetooth Core specification version 5.1, Vol 6, Part A, Section 4.4 | | | | | | |

4.3.5.2.5 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.60. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit | |
|--|---------------------|--|-----|--------|-----|------|--|
| Max usable receiver input level | SAT | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm | |
| Sensitivity | SENS | Signal is reference signal ¹ | — | -100.7 | — | dBm | |
| | | With non-ideal signals ^{2 1} | — | -100 | — | dBm | |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | +2.6 | — | dB | |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 4 3 5} | — | -8.8 | — | dB | |
| | | Interferer is reference signal at -1 MHz offset ^{1 4 3 5} | — | -9 | — | dB | |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -43.3 | — | dB | |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -51.5 | — | dB | |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 4 3 5} | — | -44.4 | — | dB | |
| | | Interferer is reference signal at -3 MHz offset ^{1 4 3 5} | — | -57.1 | — | dB | |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -43.3 | — | dB | |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -44.4 | — | dB | |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -8.8 | — | dB | |
| Note: | | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | | |
| 3. Desired signal -72 dBm. | | | | | | | |
| 4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz. | | | | | | | |
| 5. With allowed exceptions. | | | | | | | |

4.3.5.2.6 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

Unless otherwise indicated, typical conditions are: $T_A = 25^\circ\text{C}$, $\text{PAVDD} = 3.0\text{V}$, $\text{AVDD} = \text{DVDD} = \text{IOVDD} = \text{RFVDD} = \text{PAVDD}$. Crystal frequency=38.4 MHz. RF center frequency 2.45 GHz. Antenna port 2.

Table 4.61. RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit | |
|--|---------------------|--|-----|--------|-----|------|--|
| Max usable receiver input level | SAT | Signal is reference signal, packet length is 37 bytes ¹ | — | 10 | — | dBm | |
| Sensitivity | SENS | Signal is reference signal ¹ | — | -105 | — | dBm | |
| | | With non-ideal signals ^{2 1} | — | -104.6 | — | dBm | |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | +1.2 | — | dB | |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 4 3 5} | — | -13 | — | dB | |
| | | Interferer is reference signal at -1 MHz offset ^{1 4 3 5} | — | -13.3 | — | dB | |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +2 MHz offset ^{1 4 3 5} | — | -48.6 | — | dB | |
| | | Interferer is reference signal at -2 MHz offset ^{1 4 3 5} | — | -56.1 | — | dB | |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 4 3 5} | — | -47.1 | — | dB | |
| | | Interferer is reference signal at -3 MHz offset ^{1 4 3 5} | — | -61.4 | — | dB | |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -48.6 | — | dB | |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -47.1 | — | dB | |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -13 | — | dB | |
| Note: | | | | | | | |
| 1. 0.1% Bit Error Rate. | | | | | | | |
| 2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1 | | | | | | | |
| 3. Desired signal -79 dBm. | | | | | | | |
| 4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz. | | | | | | | |
| 5. With allowed exceptions. | | | | | | | |

4.3.6 Flash Characteristics

Table 4.62. Flash Characteristics

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|----------------------|---------------------------------|--------|------|------|--------|
| Flash erase cycles before failure ¹ | EC _{FLASH} | T _A ≤ 125 °C | 10,000 | — | — | cycles |
| Flash data retention ¹ | RET _{FLASH} | T _A ≤ 125 °C | 10 | — | — | years |
| Program Time | t _{PROG} | one word (32-bits) | 25 | 31 | 35 | μs |
| | | average per word over 128 words | 8 | 9.5 | 11 | μs |
| Page Erase Time ² | t _{PERASE} | | 16 | 17.5 | 20 | ms |
| Mass Erase Time ^{3 4} | t _{MERASE} | | 8 | 9 | 10.2 | ms |
| Page Erase Current | I _{ERASE} | T _A = 25 °C | — | — | 2.13 | mA |
| Program Current | I _{WRITE} | T _A = 25 °C | — | — | 2.73 | mA |
| Mass Erase Current | I _{MERASE} | T _A = 25 °C | — | — | 2.30 | mA |
| Flash Supply voltage during write or erase | V _{FLASH} | | 1.71 | — | 3.8 | V |

Note:

1. Flash data retention information is published in the Quarterly Quality and Reliability Report.
2. Page Erase time is measured from setting the ERASEPAGE bit in the MSC_WRITECMD register until the BUSY bit in the MSC-STATUS register is cleared to 0. Internal set-up and hold times are included.
3. Mass Erase is issued by the CPU and erases all of User space.
4. Mass Erase time is measured from setting the ERASEMAIN0 bit in the MSC_WRITECMD register until the BUSY bit in the MSC-STATUS register is cleared to 0. Internal set-up and hold times are included.

4.3.7 Energy Mode Wake-up and Entry Times

Unless otherwise specified, these times are measured using the HFRCO at 19 MHz.

Table 4.63. Energy Mode Wake-up and Entry Times

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------|----------------------|------------------------------------|-----|------|-----|-------|
| Wake-up Time from EM1 | t _{EM1_WU} | Code execution from flash | — | 3 | — | HCLKs |
| | | Code execution from RAM | — | 1.42 | — | μs |
| Wake-up Time from EM2 | t _{EM2_WU} | Code execution from flash | — | 16.6 | — | μs |
| | | Code execution from RAM | — | 4.39 | — | μs |
| | | Code execution from flash @ 80 MHz | — | 13.1 | — | μs |
| | | Code execution from RAM @ 80 MHz | — | 3.32 | — | μs |
| Wake-up Time from EM3 | t _{EM3_WU} | Code execution from flash | — | 16.6 | — | μs |
| | | Code execution from RAM | — | 4.39 | — | μs |
| | | Code execution from flash @ 80 MHz | — | 13.1 | — | μs |
| | | Code execution from RAM @ 80 MHz | — | 3.32 | — | μs |
| Wake-up Time from EM4 | t _{EM4_WU} | Code execution from Flash | — | 15.1 | — | ms |
| Entry time to EM1 | t _{EM1_ENT} | Code execution from flash | — | 1.49 | — | μs |
| Entry time to EM2 | t _{EM2_ENT} | Code execution from flash | — | 59.0 | — | μs |
| Entry time to EM3 | t _{EM3_ENT} | Code execution from flash | — | 59.0 | — | μs |
| Entry time to EM4 | t _{EM4_ENT} | Code execution from flash | — | 68.6 | — | μs |

4.3.8 Oscillators

4.3.8.1 High Frequency Crystal Oscillator

Unless otherwise indicated, typical conditions are: AVDD = DVDD = RFVDD = 3.0 V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation, operating supply voltage range, and operating temperature range.

Table 4.64. High Frequency Crystal Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------------------------|---|-----|------|-----|------|
| Crystal Frequency | F _{HFXO} | see note ^{1 2} | — | 38.4 | — | MHz |
| Supported crystal equivalent series resistance (ESR) | ESR _{HFXO_38M4} | 38.4 MHz, C _L = 10 pF ³ | — | — | 40 | Ω |
| Supported range of crystal load capacitance | C _{HFXO_LC} | 38.4 MHz, ESR = 40 ⁴ | — | 10 | — | pF |
| Supply Current | I _{HFXO} | | — | 500 | — | μA |
| Startup Time ⁵ | T _{STARTUP} | 38.4 MHz, ESR = 40 Ω, C _L = 10 pF | — | 160 | — | μs |
| On-chip tuning cap step size ⁶ | SS _{HFXO} | | — | 0.04 | — | pF |

Note:

1. The BLE radio requires a 38.4 MHz crystal with a tolerance of ± 50 ppm over temperature and aging. Please use a crystal with the recommended frequency and tolerance.
2. The ZigBee radio requires a 38.4 MHz crystal with a tolerance of ± 40 ppm over temperature and aging. Please use a crystal with the recommended frequency and tolerance.
3. The crystal should have a maximum ESR less than or equal to this maximum rating.
4. It is recommended to use a crystal with a 10 pF load capacitance rating. Only crystals with a 10 pF load cap rating have been characterized for RF use.
5. Startup time does not include time implemented by programmable TIMEOUTSTEADY delay.
6. The tuning step size is the effective step size when incrementing both of the tuning capacitors by one count. The step size for the each of the individual tuning capacitors is twice this value.

4.3.8.2 Low Frequency Crystal Oscillator

Table 4.65. Low Frequency Crystal Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-----------------|---|------|--------|------|------|
| Crystal Frequency | F_{LFXO} | | — | 32.768 | — | kHz |
| Supported Crystal equivalent series resistance (ESR) | ESR_{LFXO} | GAIN = 0 | — | — | 80 | kΩ |
| | | GAIN = 1 to 3 | — | — | 100 | kΩ |
| Supported range of crystal load capacitance ¹ | C_L_{LFXO} | GAIN = 0 | 4 | — | 6 | pF |
| | | GAIN = 1 | 6 | — | 10 | pF |
| | | GAIN = 2 (see note ²) | 10 | — | 12.5 | pF |
| | | GAIN = 3 (see note ²) | 12.5 | — | 18 | pF |
| Current consumption | I_{CL12p5} | ESR = 70 kΩ, C_L = 12.5 pF, GAIN ³ = 2, AGC ⁴ = 1 | — | 220 | — | nA |
| Startup Time | $T_{STARTUP}$ | ESR = 70 kΩ, C_L = 7 pF, GAIN ³ = 1, AGC ⁴ = 1 | — | 259 | — | ms |
| On-chip tuning cap step size | SS_{LFXO} | | — | 0.26 | — | pF |
| On-chip tuning capacitor value at minimum setting ⁵ | C_{LFXO_MIN} | CAPTUNE = 0 | — | 4 | — | pF |
| On-chip tuning capacitor value at maximum setting ⁵ | C_{LFXO_MAX} | CAPTUNE = 0x4F | — | 24.5 | — | pF |
| Note: | | | | | | |
| 1. Total load capacitance seen by the crystal | | | | | | |
| 2. Crystals with a load capacitance of greater than 12 pF require external load capacitors. | | | | | | |
| 3. In LFXO_CAL Register | | | | | | |
| 4. In LFXO_CFG Register | | | | | | |
| 5. The effective load capacitance seen by the crystal will be $C_{LFXO}/2$. This is because each XTAL pin has a tuning cap and the two caps will be seen in series by the crystal | | | | | | |

4.3.8.3 High Frequency RC Oscillator (HFRCO)

Unless otherwise indicated, typical conditions are: AVDD = DVDD = 3.0 V. TA = 25 °C. Minimum and maximum values in this table represent the worst conditions across process variation, operating supply voltage range, and operating temperature range.

Table 4.66. High Frequency RC Oscillator (HFRCO)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------------------|---|-----|------|-----|--------|
| Frequency Accuracy | F _{HFRCO_ACC} | For all production calibrated frequencies | -3 | — | 3 | % |
| Current consumption on all supplies ¹ | I _{HFRCO} | F _{HFRCO} = 1 MHz | — | 27 | — | µA |
| | | F _{HFRCO} = 2 MHz | — | 27 | — | µA |
| | | F _{HFRCO} = 4 MHz | — | 27 | — | µA |
| | | F _{HFRCO} = 7 MHz | — | 63 | — | µA |
| | | F _{HFRCO} = 13 MHz | — | 82 | — | µA |
| | | F _{HFRCO} = 16 MHz | — | 92 | — | µA |
| | | F _{HFRCO} = 19 MHz | — | 96 | — | µA |
| | | F _{HFRCO} = 26 MHz | — | 123 | — | µA |
| | | F _{HFRCO} = 32 MHz | — | 148 | — | µA |
| | | F _{HFRCO} = 38 MHz ² | — | 181 | — | µA |
| | | F _{HFRCO} = 40 MHz ³ | — | 185 | — | µA |
| | | F _{HFRCO} = 48 MHz ² | — | 219 | — | µA |
| Clock Out current for HFRCODPLL ⁴ | I _{CLKOUT_HFRCODPLL} | FORCEEN bit of HFRCO0_CTRL = 1 | — | 5.0 | — | µA/MHz |
| | | | | | | |
| Clock Out current for HFRCOEM23 ⁴ | I _{CLKOUT_HFRCOEM23} | FORCEEN bit of HFRCOEM23_CTRL = 1 | — | 1.25 | — | µA/MHz |
| Coarse trim step Size (% of period) | SS _{HFRCO_COARSE} | Step size measured at coarse trim mid-scale. (Fine trim also set to mid scale.) | — | 0.64 | — | % |
| Fine trim step Size (% of period) | SS _{HFRCO_FINE} | Step size measured at fine trim mid-scale. (Coarse trim also set to mid scale.) | — | 0.1 | — | % |
| Period jitter | P _J _{HFRCO} | 19 MHz | — | 0.04 | — | % RMS |
| Startup Time ⁵ | T _{STARTUP} | FREQRANGE = 0 to 7 | — | 3.2 | — | µs |
| | | FREQRANGE = 8 to 15 | — | 1.2 | — | µs |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|------------------------------------|-------------------|----------------|------|-----|------|------|
| Band Frequency Limits ⁶ | f_{HFRCO_BAND} | FREQRANGE = 0 | 3.71 | — | 5.24 | MHz |
| | | FREQRANGE = 1 | 4.39 | — | 6.26 | MHz |
| | | FREQRANGE = 2 | 5.25 | — | 7.55 | MHz |
| | | FREQRANGE = 3 | 6.22 | — | 9.01 | MHz |
| | | FREQRANGE = 4 | 7.88 | — | 11.6 | MHz |
| | | FREQRANGE = 5 | 9.9 | — | 14.6 | MHz |
| | | FREQRANGE = 6 | 11.5 | — | 17 | MHz |
| | | FREQRANGE = 7 | 14.1 | — | 20.9 | MHz |
| | | FREQRANGE = 8 | 16.4 | — | 24.7 | MHz |
| | | FREQRANGE = 9 | 19.8 | — | 30.4 | MHz |
| | | FREQRANGE = 10 | 22.7 | — | 34.9 | MHz |
| | | FREQRANGE = 11 | 28.6 | — | 44.4 | MHz |
| | | FREQRANGE = 12 | 33 | — | 51 | MHz |
| | | FREQRANGE = 13 | 42.2 | — | 64.6 | MHz |
| | | FREQRANGE = 14 | 48.8 | — | 74.8 | MHz |
| | | FREQRANGE = 15 | 57.6 | — | 87.4 | MHz |

Note:

1. Does not include additional clock tree current. See specifications for additional current when selected as a clock source for a particular clock multiplexer.
2. This frequency is calibrated for the HFRCODPLL (HFRCO0) only.
3. This frequency is calibrated for the HFRCOEM23 only.
4. When the HFRCO is enabled for characterization using the FORCEEN bit, the total current will be the HFRCO core current plus the specified CLKOUT current. When the HFRCO is enabled on demand, the clock current may be different.
5. Hardware delay ensures settling to within $\pm 0.5\%$. Hardware also enforces this delay on a band change.
6. The frequency band limits represent the lowest and highest frequency which each band can achieve over the operating range.

4.3.8.4 Fast Start_Up RC Oscillator (FSRCO)**Table 4.67. Fast Start_Up RC Oscillator (FSRCO)**

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------|-------------|----------------|------|-----|------|------|
| FSRCO frequency | f_{FSRCO} | | 17.2 | 20 | 21.2 | MHz |

4.3.8.5 Low Frequency RC Oscillator

Table 4.68. Low Frequency RC Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|---------------|----------------|--------|--------|--------|---------|
| Nominal oscillation frequency | F_{LFRCO} | | 31.785 | 32.768 | 33.751 | kHz |
| Startup time | $T_{STARTUP}$ | | — | 128 | — | μs |
| Current consumption | I_{LFRCO} | | — | 177 | — | nA |

4.3.8.6 Ultra Low Frequency RC Oscillator

Table 4.69. Ultra Low Frequency RC Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------|--------------|----------------|-------|-----|-------|------|
| Oscillation Frequency | F_{ULFRCO} | | 0.944 | 1.0 | 1.095 | kHz |

4.3.9 GPIO Pins (3V GPIO pins)

Unless otherwise indicated, typical conditions are: AVDD = DVDD = IOVDD = 3.0 V.

Table 4.70. GPIO Pins (3V GPIO pins)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------------|------------------------|---|--------------|-----|-------------|------|
| Leakage current | I _{LEAK_IO} | MODEx = DISABLED, IOVDD = 1.71V | — | 1.9 | — | nA |
| | | MODEx = DISABLED, IOVDD = 3.0 V | — | 2.5 | — | nA |
| | | PC03, PC04 and PD00 pins. MODEx = DISABLED, IOVDD = 3.8 V T _A = 125 °C | — | — | 340 | nA |
| | | All other GPIO pins. MODEx = DISABLED, IOVDD = 3.8 V T _A = 125 °C | — | — | 250 | nA |
| Input low voltage ¹ | V _{IL} | Any GPIO pin | — | — | 0.3 * IOVDD | V |
| | | RESETn | — | — | 0.3 * DVDD | V |
| Input high voltage ¹ | V _{IH} | Any GPIO pin | 0.7 * IOVDD | — | — | V |
| | | RESETn | 0.7 * DVDD | — | — | V |
| Hysteresis of input voltage | V _{HYS} | Any GPIO pin | 0.05 * IOVDD | — | — | V |
| | | RESETn | 0.05 * DVDD | — | — | V |
| Output low voltage | V _{OL} | Sinking 20mA, IOVDD = 3.0 V | — | — | 0.2 * IOVDD | V |
| | | Sinking 8mA, IOVDD = 1.71 V | — | — | 0.4 * IOVDD | V |
| Output high voltage | V _{OH} | Sourcing 20mA, IOVDD = 3.0 V | 0.8 * IOVDD | — | — | V |
| | | Sourcing 8mA, IOVDD = 1.71 V | 0.6 * IOVDD | — | — | V |
| GPIO rise time | T _{GPIO_RISE} | IOVDD = 3.0V, C _{load} = 50 pF, SLEWRATE = 4, 10% to 90% | — | 6.5 | — | ns |
| | | IOVDD = 1.7V, C _{load} = 50 pF, SLEWRATE = 4, 10% to 90% | — | 9.4 | — | ns |
| GPIO fall time | T _{GPIO_FALL} | IOVDD = 3.0V, C _{load} = 50 pF, SLEWRATE = 4, 90% to 10% | — | 5.7 | — | ns |
| | | IOVDD = 1.7V, C _{load} = 50 pF, SLEWRATE = 4, 90% to 10% | — | 9.2 | — | ns |
| Pull up/down resistance ² | R _{PULL} | Any GPIO pin. Pull-up to IOVDD: MODEn = DISABLE DOUT=1. Pull-down to VSS: MODEn = WIREDORPULLDOWN DOUT = 0. | 33 | 44 | 55 | kΩ |
| | | RESETn pin. Pull-up to DVDD | 33 | 44 | 55 | kΩ |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------|------------------------|-----|-----|-----|------|
| Maximum filtered glitch width | T_{GF} | MODE = INPUT, DOUT = 1 | — | 26 | — | ns |
| RESETn low time to ensure pin reset | T_{RESET} | | 100 | — | — | ns |
| Note: | | | | | | |
| 1. GPIO input thresholds are proportional to the IOVDD pin. RESETn input thresholds are proportional to DVDD. 2. GPIO pull-ups connect to IOVDD supply, pull-downs connect to VSS. RESETn pull-up connects to DVDD. | | | | | | |

4.3.10 Analog to Digital Converter (ADC)

Unless otherwise indicated, typical conditions are: ADCCLK=10 MHz, OSR=2

Table 4.71. Analog to Digital Converter (ADC)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-----------------------------|--|------------------|-------------------------|-------------------|-------|
| Main analog supply | V _{AVDD} | Normal mode | 1.71 | — | 3.8 | V |
| Maximum Input Range ¹ | V _{IN_MAX} | Maximum allowable input voltage | 0 | — | V _{AVDD} | V |
| Full-Scale Voltage | V _{FS} | Voltage required for Full-Scale measurement | — | V _{REF} / Gain | — | V |
| Input Measurement Range | V _{IN} | Differential Mode - Plus and Minus inputs | -V _{FS} | — | +V _{FS} | V |
| | | Single Ended Mode - One input tied to ground | 0 | — | V _{FS} | V |
| Input Sampling Capacitance | C _S | Analog Gain = 1x | — | 1.8 | — | pF |
| | | Analog Gain = 2x | — | 3.6 | — | pF |
| | | Analog Gain = 3x | — | 5.4 | — | pF |
| | | Analog Gain = 4x | — | 7.2 | — | pF |
| | | Analog Gain = 0.5x | — | 0.9 | — | pF |
| ADC clock frequency | f _{ADC_CLK} | Gain = 1x or 0.5x | — | — | 10 | MHz |
| | | Gain = 2x | — | — | 5 | MHz |
| | | Gain = 3x or 4x | — | — | 2.5 | MHz |
| Input sampling frequency | f _S | | — | f _{ADC_CLK} /4 | — | MHz |
| Throughput rate | f _{SAMPLE} | f _{ADC_CLK} = 10 MHz | — | — | 1 | Msps |
| Current from all supplies, Continuous operation | I _{ADC_CONTINUOUS} | 1 Msps, OSR=2, f _{ADC_CLK} = 10 MHz | — | 310 | 400 | µA |
| Current in Standby mode. ADC is not functional but can wake up in 1us. | I _{STBY} | | — | 16 | — | µA |
| ADC Startup Time | t _{startup} | From power down state | — | 5 | — | µs |
| | | From standby state | — | 1 | — | µs |
| ADC Resolution | Resolution | | — | 12 | — | bits |
| Differential Nonlinearity | DNL | Differential Input. (No missing codes) | -1 | +/- 0.25 | 1.5 | LSB12 |
| Integral Nonlinearity | INL | Differential Input. | -2.5 | +/- 0.65 | 2.5 | LSB12 |
| Effective number of bits | ENOB | Differential Input. Gain=1x, f _{IN} = 10 kHz, Internal V _{REF} =1.21V. | 10.5 | 11.18 | — | bits |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------------------|---|------|-------|------|-------|
| Signal to Noise + Distortion Ratio Normal Mode | SNDR | Differential Input. Gain=1x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | 65 | 69.1 | — | dB |
| | | Differential Input. Gain=2x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | — | 68.8 | — | dB |
| | | Differential Input. Gain=4x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | — | 66.9 | — | dB |
| | | Differential Input. Gain=0.5x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | — | 69.2 | — | dB |
| Total Harmonic Distortion | THD | Differential Input. Gain=1x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | — | -80.3 | -70 | dB |
| Spurious-Free Dynamic Range | SFDR | Differential Input. Gain=1x, $f_{IN} = 10$ kHz, Internal VREF=1.21V | 72 | 86.5 | — | dB |
| Common Mode Rejection Ratio | CMRR | DC to 100 Hz | — | 87.0 | — | dB |
| | | AC (measured at 500 kHz) | — | 68.6 | — | dB |
| Power Supply Rejection Ratio | PSRR | DC to 100 Hz | — | 80.4 | — | dB |
| | | AC high frequency, using VREF _{pad} (measured at 500 kHz) | — | 33.4 | — | dB |
| | | AC high frequency, using internal VBGR (measured at 500 kHz) | — | 65.2 | — | dB |
| Gain Error, Normal mode | GE | GAIN = 1 and 0.5, using external VREF, direct mode, $f_{ADC_CLK} = 10$ MHz | -0.3 | 0.069 | 0.3 | % |
| | | GAIN = 2, using external VREF, direct mode, $f_{ADC_CLK} = 5$ MHz | -0.4 | 0.151 | 0.4 | % |
| | | GAIN = 3, using external VREF, direct mode, $f_{ADC_CLK} = 2.5$ MHz | -0.7 | 0.186 | 0.7 | % |
| | | GAIN = 4, using external VREF, direct mode, $f_{ADC_CLK} = 2.5$ MHz | -1.1 | 0.227 | 1.1 | % |
| | | Internal VREF, Gain=1 | — | 0.023 | — | % |
| Offset Error, Normal mode | OFFSET | GAIN = 1 and 0.5, Differential Input | -3 | 0.27 | 3 | LSB12 |
| | | GAIN = 2, Differential Input | -4 | 0.27 | 4 | LSB12 |
| | | GAIN = 3, Differential Input | -4 | 0.25 | 4 | LSB12 |
| | | GAIN = 4, Differential Input | -4 | 0.29 | 4 | LSB12 |
| External reference voltage range ¹ | V _{EVREF} | | 1.0 | — | AVDD | V |
| Internal Reference voltage | V _{IVREF} | | — | 1.18 | — | V |
| Note: | | | | | | |
| 1. When inputs are routed to external GPIO pins, the maximum pin voltage is limited to the lower of the IOVDD and AVDD supplies. | | | | | | |

4.3.11 Analog Comparator (ACMP)

Table 4.72. Analog Comparator (ACMP)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit | |
|--|------------------------|---|------|------|------|------|--|
| ACMP Supply current | I _{ACMP} | BIAS = 4, HYST = DISABLED | — | 5.5 | — | µA | |
| | | BIAS = 5, HYST = DISABLED | — | 11 | — | µA | |
| | | BIAS = 6, HYST = DISABLED | — | 27 | — | µA | |
| | | BIAS = 7, HYST = DISABLED | — | 51 | 77 | µA | |
| ACMP Supply current with Hysteresis | I _{ACMP_WHYS} | BIAS = 4, HYST = SYM30MV | — | 7.5 | — | µA | |
| | | BIAS = 5, HYST = SYM30MV | — | 16 | — | µA | |
| | | BIAS = 6, HYST = SYM30MV | — | 39 | — | µA | |
| | | BIAS = 7, HYST = SYM30MV | — | 72 | — | µA | |
| Comparator delay with 100 mV overdrive | T _{DELAY} | BIAS = 4 | — | 222 | — | ns | |
| | | BIAS = 5 | — | 123 | — | ns | |
| | | BIAS = 6 | — | 71 | — | ns | |
| | | BIAS = 7 | — | 55 | — | ns | |
| Input offset voltage | V _{OFFSET} | BIAS = 4, V _{CM} = 0.15 to AVDD - 0.15 V | -25 | — | 25 | mV | |
| | | BIAS = 7, V _{CM} = 0.15 to AVDD - 0.15 V | -30 | — | 30 | mV | |
| Input Range | V _{IN} | Input Voltage Range | 0 | — | AVDD | V | |
| Hysteresis (BIAS = 4) | V _{HYST_4} | HYST = SYM10MV ¹ | — | 16.8 | — | mV | |
| | | HYST = SYM20MV ¹ | — | 32.4 | — | mV | |
| | | HYST = SYM30MV ¹ | — | 45.7 | — | mV | |
| Reference Voltage | V _{ACMPREF} | Internal 1.25 V Reference | 1.19 | 1.25 | 1.31 | V | |
| | | Internal 2.5 V Reference | 2.34 | 2.5 | 2.75 | V | |
| Capacitive Sense Oscillator Resistance ² | R _{CSRESSEL} | CSRESSEL = 0 | — | 15 | — | kΩ | |
| | | CSRESSEL = 1 | — | 24 | — | kΩ | |
| | | CSRESSEL = 2 | — | 43 | — | kΩ | |
| | | CSRESSEL = 3 | — | 61 | — | kΩ | |
| | | CSRESSEL = 4 | — | 80 | — | kΩ | |
| | | CSRESSEL = 5 | — | 99 | — | kΩ | |
| | | CSRESSEL = 6 | — | 118 | — | kΩ | |
| Note: | | | | | | | |
| 1. V _{CM} = 1.25 V | | | | | | | |
| 2. Capacitive Sense has been deprecated and is not recommended for use | | | | | | | |

4.3.12 Temperature Sensor

Table 4.73. Temperature Sensor

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|--------------------|----------------|-----|------|-----|------|
| Temperature sensor range | T_{sense_range} | | -40 | — | 125 | °C |
| Temperature sensor resolution | $T_{senseRes}$ | | — | 0.25 | — | °C |

4.3.13 Brown Out Detectors

4.3.13.1 DVDD BOD

BOD thresholds on DVDD in EM0 and EM1 only, unless otherwise noted. Typical conditions are at $T_A = 25^\circ\text{C}$. Minimum and maximum values in this table represent the worst conditions across process variation, operating supply voltage range, and operating temperature range.

Table 4.74. DVDD BOD

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------|--------------------------------|---|------|------|------|---------------|
| BOD threshold | $V_{\text{DVDD_BOD}}$ | Supply Rising | — | 1.67 | 1.71 | V |
| | | Supply Falling | 1.62 | 1.65 | — | V |
| BOD response time | $t_{\text{DVDD_BOD_DE-LAY}}$ | Supply dropping at 100 mV/ μs slew rate ¹ | — | 0.95 | — | μs |
| BOD hysteresis | $V_{\text{DVDD_BOD_HYS-T}}$ | | — | 20 | — | mV |

Note:

1. If the supply slew rate exceeds the specified slew rate, the BOD may trip later than expected (at a threshold below the minimum specified threshold), or the BOD may not trip at all (e.g., if the supply ramps down and then back up at a very fast rate)

4.3.13.2 LE DVDD BOD

BOD thresholds on DVDD pin for low energy modes EM2 to EM4, unless otherwise noted.

Table 4.75. LE DVDD BOD

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------|-----------------------------------|---|-----|-----|------|---------------|
| BOD threshold | $V_{\text{DVDD_LE_BOD}}$ | Supply Falling | 1.5 | — | 1.71 | V |
| BOD response time | $t_{\text{DVDD_LE_BOD_DELAY}}$ | Supply dropping at 2 mV/ μs slew rate ¹ | — | 50 | — | μs |
| BOD hysteresis | $V_{\text{DVDD_LE_BOD_HYST}}$ | | — | 20 | — | mV |

Note:

1. If the supply slew rate exceeds the specified slew rate, the BOD may trip later than expected (at a threshold below the minimum specified threshold), or the BOD may not trip at all (e.g., if the supply ramps down and then back up at a very fast rate)

4.3.13.3 AVDD and VIO BODs

BOD thresholds for AVDD BOD and BOD for VIO supply or supplies. All energy modes.

Table 4.76. AVDD and VIO BODs

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------|------------------|---|------|-----|------|---------|
| BOD threshold | V_{BOD} | Supply falling | 1.45 | — | 1.71 | V |
| BOD response time | t_{BOD_DELAY} | Supply dropping at 2 mV/ μ s slew rate ¹ | — | 50 | — | μ s |
| BOD hysteresis | V_{BOD_HYST} | | — | 20 | — | mV |

Note:

1. If the supply slew rate exceeds the specified slew rate, the BOD may trip later than expected (at a threshold below the minimum specified threshold), or the BOD may not trip at all (e.g., if the supply ramps down and then back up at a very fast rate)

4.3.14 USART SPI Main Timing

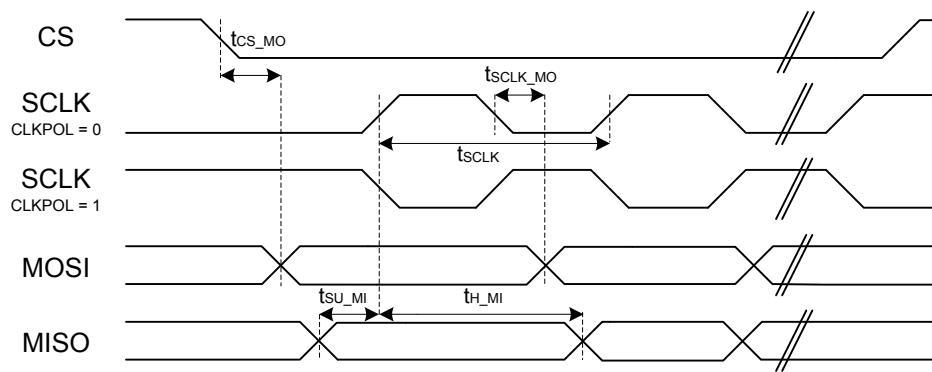


Figure 4.11. SPI Main Timing (SMSDELAY = 0)

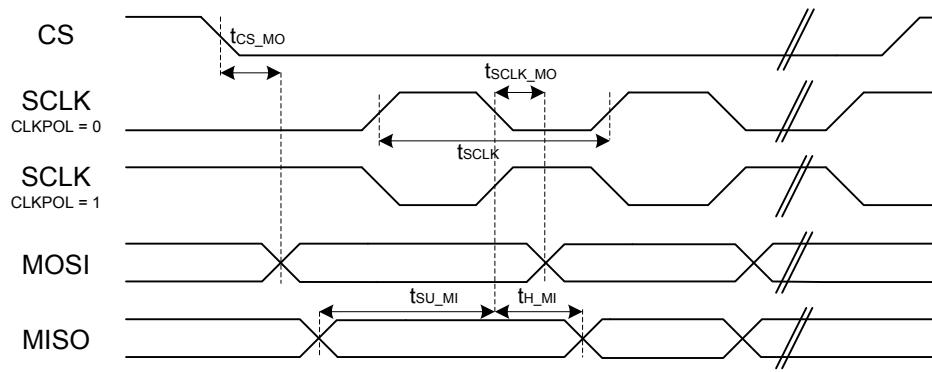


Figure 4.12. SPI Main Timing (SMSDELAY = 1)

4.3.14.1 USART SPI Main Timing

Timing specifications are for all SPI signals routed to the same DBUS (DBUSAB or DBUSCD). All GPIO set to slew rate = 6.

Table 4.77. USART SPI Main Timing

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------|----------------|----------------|--------------|-----|------|------|
| SCLK period ^{1 2 3} | t_{SCLK} | | $2*t_{PCLK}$ | — | — | ns |
| CS to MOSI ^{1 2} | t_{CS_MO} | | -24 | — | 24.5 | ns |
| SCLK to MOSI ^{1 2} | t_{SCLK_MO} | | -17.5 | — | 16 | ns |
| MISO setup time ^{1 2} | t_{SU_MI} | IOVDD = 1.62 V | 50 | — | — | ns |
| | | IOVDD = 3.0 V | 35 | — | — | ns |
| MISO hold time ^{1 2} | t_{H_MI} | | -9 | — | — | ns |

Note:

1. Applies for both CLKPHA = 0 and CLKPHA = 1.
2. Measurement done with 8 pF output loading at 10% and 90% of the I/O supply.
3. t_{PCLK} is one period of the selected PCLK.

4.3.15 USART SPI Secondary Timing

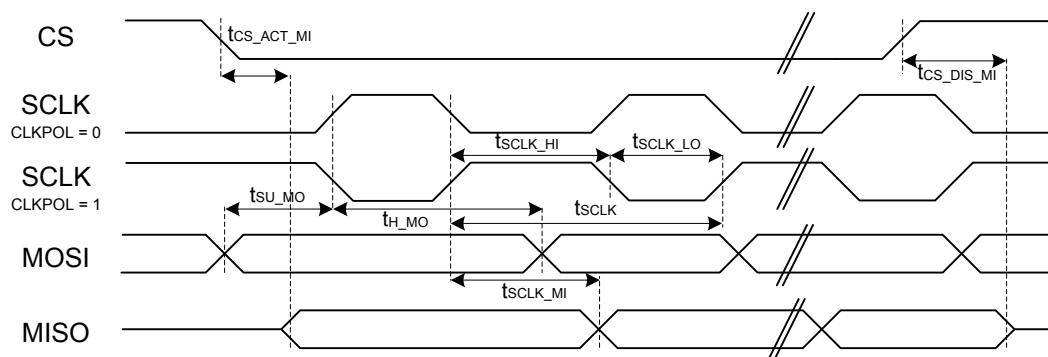


Figure 4.13. SPI Secondary Timing

4.3.15.1 USART SPI Secondary Timing

Timing specifications are for all SPI signals routed to the same DBUS (DBUSAB or DBUSCD). All GPIO set to slew rate = 6.

Table 4.78. USART SPI Secondary Timing

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------------------|-------------------|----------------|-----------------------|-----|---------------------|------|
| SCLK period ^{1 2 3} | t_{SCLK} | | $6*t_{PCLK}$ | — | — | ns |
| SCLK high time ^{1 2 3} | t_{SCLK_HI} | | $2.5*t_{PCLK}$ | — | — | ns |
| SCLK low time ^{1 2 3} | t_{SCLK_LO} | | $2.5*t_{PCLK}$ | — | — | ns |
| CS active to MISO ^{1 2} | $t_{CS_ACT_MI}$ | | 20 | — | 65 | ns |
| CS disable to MISO ^{1 2} | $t_{CS_DIS_MI}$ | | 19.5 | — | 57 | ns |
| MOSI setup time ^{1 2} | t_{SU_MO} | | 3 | — | — | ns |
| MOSI hold time ^{1 2 3} | t_{H_MO} | | 2 | — | — | ns |
| SCLK to MISO ^{1 2 3} | t_{SCLK_MI} | | $16.5 + 1.5*t_{PCLK}$ | — | $38 + 2.5*t_{PCLK}$ | ns |

Note:

1. Applies for both CLKPHA = 0 and CLKPHA = 1 (figure only shows CLKPHA = 0).
2. Measurement done with 8 pF output loading at 10% and 90% of the I/O supply (figure shows 50%).
3. t_{PCLK} is one period of the selected PCLK.

4.3.16 I2C Electrical Specifications

4.3.16.1 I2C Standard-mode (Sm)

CLHR set to 0 in the I2Cn_CTRL register.

Table 4.79. I2C Standard-mode (Sm)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------|----------------|-----|-----|-----|---------|
| SCL clock frequency ¹ | f_{SCL} | | 0 | — | 100 | kHz |
| SCL clock low time | t_{LOW} | | 4.7 | — | — | μs |
| SCL clock high time | t_{HIGH} | | 4 | — | — | μs |
| SDA set-up time | t_{SU_DAT} | | 250 | — | — | ns |
| SDA hold time | t_{HD_DAT} | | 0 | — | — | ns |
| Repeated START condition set-up time | t_{SU_STA} | | 4.7 | — | — | μs |
| Repeated START condition hold time | t_{HD_STA} | | 4.0 | — | — | μs |
| STOP condition set-up time | t_{SU_STO} | | 4.0 | — | — | μs |
| Bus free time between a STOP and START condition | t_{BUF} | | 4.7 | — | — | μs |

Note:

1. The maximum SCL clock frequency listed is assuming that an arbitrary clock frequency is available. The maximum attainable SCL clock frequency may be slightly less using the HFXO or HFRCO due to the limited frequencies available. The CLKDIV should be set to a value that keeps the SCL clock frequency below the max value listed.

4.3.16.2 I2C Fast-mode (Fm)

CLHR set to 1 in the I2Cn_CTRL register.

Table 4.80. I2C Fast-mode (Fm)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------|----------------|-----|-----|-----|---------|
| SCL clock frequency ¹ | f_{SCL} | | 0 | — | 400 | kHz |
| SCL clock low time | t_{LOW} | | 1.3 | — | — | μs |
| SCL clock high time | t_{HIGH} | | 0.6 | — | — | μs |
| SDA set-up time | t_{SU_DAT} | | 100 | — | — | ns |
| SDA hold time | t_{HD_DAT} | | 0 | — | — | ns |
| Repeated START condition set-up time | t_{SU_STA} | | 0.6 | — | — | μs |
| Repeated START condition hold time | t_{HD_STA} | | 0.6 | — | — | μs |
| STOP condition set-up time | t_{SU_STO} | | 0.6 | — | — | μs |
| Bus free time between a STOP and START condition | t_{BUF} | | 1.3 | — | — | μs |

Note:

1. The maximum SCL clock frequency listed is assuming that an arbitrary clock frequency is available. The maximum attainable SCL clock frequency may be slightly less using the HFXO or HFRCO due to the limited frequencies available. The CLKDIV should be set to a value that keeps the SCL clock frequency below the max value listed.

4.3.16.3 I2C Fast-mode Plus (Fm+)

CLHR set to 1 in the I2Cn_CTRL register.

Table 4.81. I2C Fast-mode Plus (Fm+)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------|----------------|------|-----|------|---------|
| SCL clock frequency ¹ | f_{SCL} | | 0 | — | 1000 | kHz |
| SCL clock low time | t_{LOW} | | 0.5 | — | — | μs |
| SCL clock high time | t_{HIGH} | | 0.26 | — | — | μs |
| SDA set-up time | t_{SU_DAT} | | 50 | — | — | ns |
| SDA hold time | t_{HD_DAT} | | 0 | — | — | ns |
| Repeated START condition set-up time | t_{SU_STA} | | 0.26 | — | — | μs |
| Repeated START condition hold time | t_{HD_STA} | | 0.26 | — | — | μs |
| STOP condition set-up time | t_{SU_STO} | | 0.26 | — | — | μs |
| Bus free time between a STOP and START condition | t_{BUF} | | 0.5 | — | — | μs |

Note:

1. The maximum SCL clock frequency listed is assuming that an arbitrary clock frequency is available. The maximum attainable SCL clock frequency may be slightly less using the HFXO or HFRCO due to the limited frequencies available. The CLKDIV should be set to a value that keeps the SCL clock frequency below the max value listed.

4.3.17 Boot Timing

Secure boot impacts the recovery time from all sources of device reset. In addition to the root code authentication process, which cannot be disabled or bypassed, the root code can authenticate a bootloader, and the bootloader can authenticate the application. In projects that include only an application and no bootloader, the root code can authenticate the application directly. The duration of each authentication operation depends on two factors: the computation of the associated image hash, which is proportional to the size of the image, and the verification of the image signature, which is independent of image size.

The duration for the root code to authenticate the bootloader will depend on the SE firmware version as well as on the size of the bootloader.

The duration for the bootloader to authenticate the application can depend on the size of the application.

The configurations below assume that the associated bootloader and application code images do not contain a bootloader certificate or an application certificate. Authenticating a bootloader certificate or an application certificate will extend the boot time by an additional 6 to 7 ms.

The table below provides the durations from the termination of reset until the completion of the secure boot process (start of main() function in the application image) under various conditions.

Conditions:

- SE firmware version 1.2.13
- Gecko Bootloader size 9.9 KB

Timing is expected to be similar for subsequent SE firmware versions. Refer to SE firmware release notes for any significant changes.

Table 4.82. Boot Timing

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|-------------------|---|-----|------|-----|------|
| Boot time | t _{BOOT} | Secure boot application check disabled, second stage bootloader check enabled ¹ , 50 kB application size | — | 29.7 | — | ms |
| | | Secure boot application check enabled, second stage bootloader check enabled ¹ , 50 kB application size | — | 39.1 | — | ms |
| | | Secure boot application check enabled, second stage bootloader check enabled ¹ , 150 kB application size | — | 43.1 | — | ms |
| | | Secure boot application check enabled, second stage bootloader check enabled ¹ , 350 kB application size | — | 50.8 | — | ms |

Note:

1. Timing is measured with the specified bootloader size. Actual bootloader size will impact the boot timing slightly, with a similar μ s / kB ratio as application size.

4.3.18 Crypto Operation Timing for SE Manager API

Values in this table represent timing from SE Manager API call to return. The Cortex-M33 HCLK frequency is 38.4 MHz. The timing specifications below are measured at the SE Manager function call API. Each duration in the table contains some portion that is influenced by SE Manager build compilation and Cortex-M33 operating frequency and some portion that is influenced by the Hardware Secure Engine's firmware version and its operating speed (typically 80 MHz). The contributions of the Cortex-M33 properties to the overall specification timing are most pronounced for the shorter operations such as AES and hash when operating on small payloads. The overhead of command processing at the mailbox interface can also dominate the timing for shorter operations.

Conditions:

- SE firmware version 1.2.13
- GSDK version 4.1.0

Timing is expected to be similar for subsequent SE firmware versions. Refer to SE firmware release notes for any significant changes.

Table 4.83. Crypto Operation Timing for SE Manager API

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------------|-------------------------|---|-----|------|-----|------|
| AES-128 timing | t _{AES128} | AES-128 CCM encryption, PT 1 kB | — | 268 | — | μs |
| | | AES-128 CCM encryption, PT 32 kB | — | 1455 | — | μs |
| | | AES-128 CTR encryption, PT 1 kB | — | 231 | — | μs |
| | | AES-128 CTR encryption, PT 32 kB | — | 794 | — | μs |
| | | AES-128 GCM encryption, PT 1 kB | — | 251 | — | μs |
| | | AES-128 GCM encryption, PT 32 kB | — | 819 | — | μs |
| AES-256 timing | t _{AES256} | AES-256 CCM encryption, PT 1 kB | — | 283 | — | μs |
| | | AES-256 CCM encryption, PT 32 kB | — | 1875 | — | μs |
| | | AES-256 CTR encryption, PT 1 kB | — | 240 | — | μs |
| | | AES-256 CTR encryption, PT 32 kB | — | 1010 | — | μs |
| | | AES-256 GCM encryption, PT 1 kB | — | 259 | — | μs |
| | | AES-256 GCM encryption, PT 32 kB | — | 1029 | — | μs |
| ECC P-256 timing | t _{ECC_P256} | ECC key generation, P-256 | — | 5.5 | — | ms |
| | | ECC signing, P-256 | — | 5.7 | — | ms |
| | | ECC verification, P-256 | — | 6.1 | — | ms |
| ECC P-521 timing ¹ | t _{ECC_P521} | ECC key generation, P-521 | — | 29.6 | — | ms |
| | | ECC signing, P-521 | — | 30.5 | — | ms |
| | | ECC verification, P-521 | — | 37.2 | — | ms |
| ECC P-25519 timing ² | t _{ECC_P25519} | ECC key generation, P-25519 | — | 4.3 | — | ms |
| | | ECC signing, P-25519 | — | 4.4 | — | ms |
| | | ECC verification, P-25519 | — | 6.1 | — | ms |
| ECDH compute secret timing | t _{ECDH} | ECDH compute secret, P-521 ¹ | — | 29.6 | — | ms |
| | | ECDH compute secret, P-25519 ² | — | 4.2 | — | ms |
| | | ECDH compute secret, P-256 | — | 5.4 | — | ms |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|------------------------|--------------------------------|-----|------|-----|------|
| ECJPAKE client timing | t _{ECJPAKE_C} | ECJPAKE client write round one | — | 21.5 | — | ms |
| | | ECJPAKE client read round one | — | 14.3 | — | ms |
| | | ECJPAKE client write round two | — | 16.2 | — | ms |
| | | ECJPAKE client read round two | — | 7.6 | — | ms |
| | | ECJPAKE client derive secret | — | 10.5 | — | ms |
| ECJPAKE server timing | t _{ECJPAKE_S} | ECJPAKE server write round one | — | 21.4 | — | ms |
| | | ECJPAKE server read round one | — | 14.3 | — | ms |
| | | ECJPAKE server write round two | — | 16.2 | — | ms |
| | | ECJPAKE server read round two | — | 7.6 | — | ms |
| | | ECJPAKE server derive secret | — | 10.6 | — | ms |
| POLY-1305 timing ¹ | t _{POLY1305} | POLY-1305, PT 1 kB | — | 214 | — | μs |
| | | POLY-1305, PT 32 kB | — | 1071 | — | μs |
| SHA-256 timing | t _{SHA256} | SHA-256, PT 1 kB | — | 109 | — | μs |
| | | SHA-256, PT 32 kB | — | 533 | — | μs |
| SHA-512 timing ¹ | t _{SHA512} | SHA-512, PT 1 kB | — | 107 | — | μs |
| | | SHA-512, PT 32 kB | — | 424 | — | μs |

Note:

1. Option is only available on OPNs with Secure Vault High feature set.
2. Option is not available on Secure Vault Mid devices with SE firmware earlier than v1.2.11.

4.3.19 Crypto Operation Average Current for SE Manager API

Values in this table represent current consumed by security core during the operation, and represent additions to the current consumed by the Cortex-M33 application CPU due to the Hardware Secure Engine CPU and its associated crypto accelerators. The current measurements below represent the average value of the current for the duration of the crypto operation. Instantaneous peak currents may be higher.

Conditions:

- SE firmware version 1.2.13
- GSDK version 4.1.0

Current consumption is expected to be similar for subsequent SE firmware versions. Refer to SE firmware release notes for any significant changes.

Table 4.84. Crypto Operation Average Current for SE Manager API

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|----------------------------------|-----------------|---|-----|-----|-----|------|
| AES-128 current | I_{AES128} | AES-128 CCM encryption, PT 1 kB | — | 4.6 | — | mA |
| | | AES-128 CCM encryption, PT 32 kB | — | 7.7 | — | mA |
| | | AES-128 CTR encryption, PT 1 kB | — | 4.3 | — | mA |
| | | AES-128 CTR encryption, PT 32 kB | — | 7.9 | — | mA |
| | | AES-128 GCM encryption, PT 1 kB | — | 4.2 | — | mA |
| | | AES-128 GCM encryption, PT 32 kB | — | 7.9 | — | mA |
| AES-256 current | I_{AES256} | AES-256 CCM encryption, PT 1 kB | — | 4.8 | — | mA |
| | | AES-256 CCM encryption, PT 32 kB | — | 7.8 | — | mA |
| | | AES-256 CTR encryption, PT 1 kB | — | 4.4 | — | mA |
| | | AES-256 CTR encryption, PT 32 kB | — | 7.9 | — | mA |
| | | AES-256 GCM encryption, PT 1 kB | — | 4.4 | — | mA |
| | | AES-256 GCM encryption, PT 32 kB | — | 7.9 | — | mA |
| ECC P-256 current | $I_{ECCP256}$ | ECC key generation, P-256 | — | 5.8 | — | mA |
| | | ECC signing, P-256 | — | 5.7 | — | mA |
| | | ECC verification, P-256 | — | 5.7 | — | mA |
| ECC P-521 current ¹ | $I_{ECCP521}$ | ECC key generation, P-521 | — | 5.9 | — | mA |
| | | ECC signing, P-521 | — | 5.8 | — | mA |
| | | ECC verification, P-521 | — | 5.8 | — | mA |
| ECC P-25519 current ² | $I_{ECCP25519}$ | ECC key generation, P-25519 | — | 5.7 | — | mA |
| | | ECC signing, P-25519 | — | 5.6 | — | mA |
| | | ECC verification, P-25519 | — | 5.7 | — | mA |
| ECDH compute secret current | I_{ECDH} | ECDH compute secret, P-521 ¹ | — | 5.9 | — | mA |
| | | ECDH compute secret, P-25519 ² | — | 5.6 | — | mA |
| | | ECDH compute secret, P-256 | — | 5.7 | — | mA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------|------------------------|--------------------------------|-----|-----|-----|------|
| ECJPAKE client current | I _{ECJPAKE_C} | ECJPAKE client write round one | — | 5.8 | — | mA |
| | | ECJPAKE client read round one | — | 5.8 | — | mA |
| | | ECJPAKE client write round two | — | 5.8 | — | mA |
| | | ECJPAKE client read round two | — | 5.7 | — | mA |
| | | ECJPAKE client derive secret | — | 5.8 | — | mA |
| ECJPAKE server current | I _{ECJPAKE_S} | ECJPAKE server write round one | — | 5.8 | — | mA |
| | | ECJPAKE server read round one | — | 5.8 | — | mA |
| | | ECJPAKE server write round two | — | 5.8 | — | mA |
| | | ECJPAKE server read round two | — | 5.7 | — | mA |
| | | ECJPAKE server derive secret | — | 5.8 | — | mA |
| POLY-1305 current ¹ | I _{POLY1305} | POLY-1305, PT 1 kB | — | 4.1 | — | mA |
| | | POLY-1305, PT 32 kB | — | 5.5 | — | mA |
| SHA-256 current | I _{SHA256} | SHA-256, PT 1 kB | — | 3.4 | — | mA |
| | | SHA-256, PT 32 kB | — | 6.5 | — | mA |
| SHA-512 current ¹ | I _{SHA512} | SHA-512, PT 1 kB | — | 3.3 | — | mA |
| | | SHA-512, PT 32 kB | — | 6.2 | — | mA |

Note:

1. Option is only available on OPNs with Secure Vault High feature set.
2. Option is not available on Secure Vault Mid devices with SE firmware earlier than v1.2.11.

4.4 Typical Performance Curves for Revision D

Typical performance curves indicate typical characterized performance under the stated conditions.

4.4.1 Supply Current

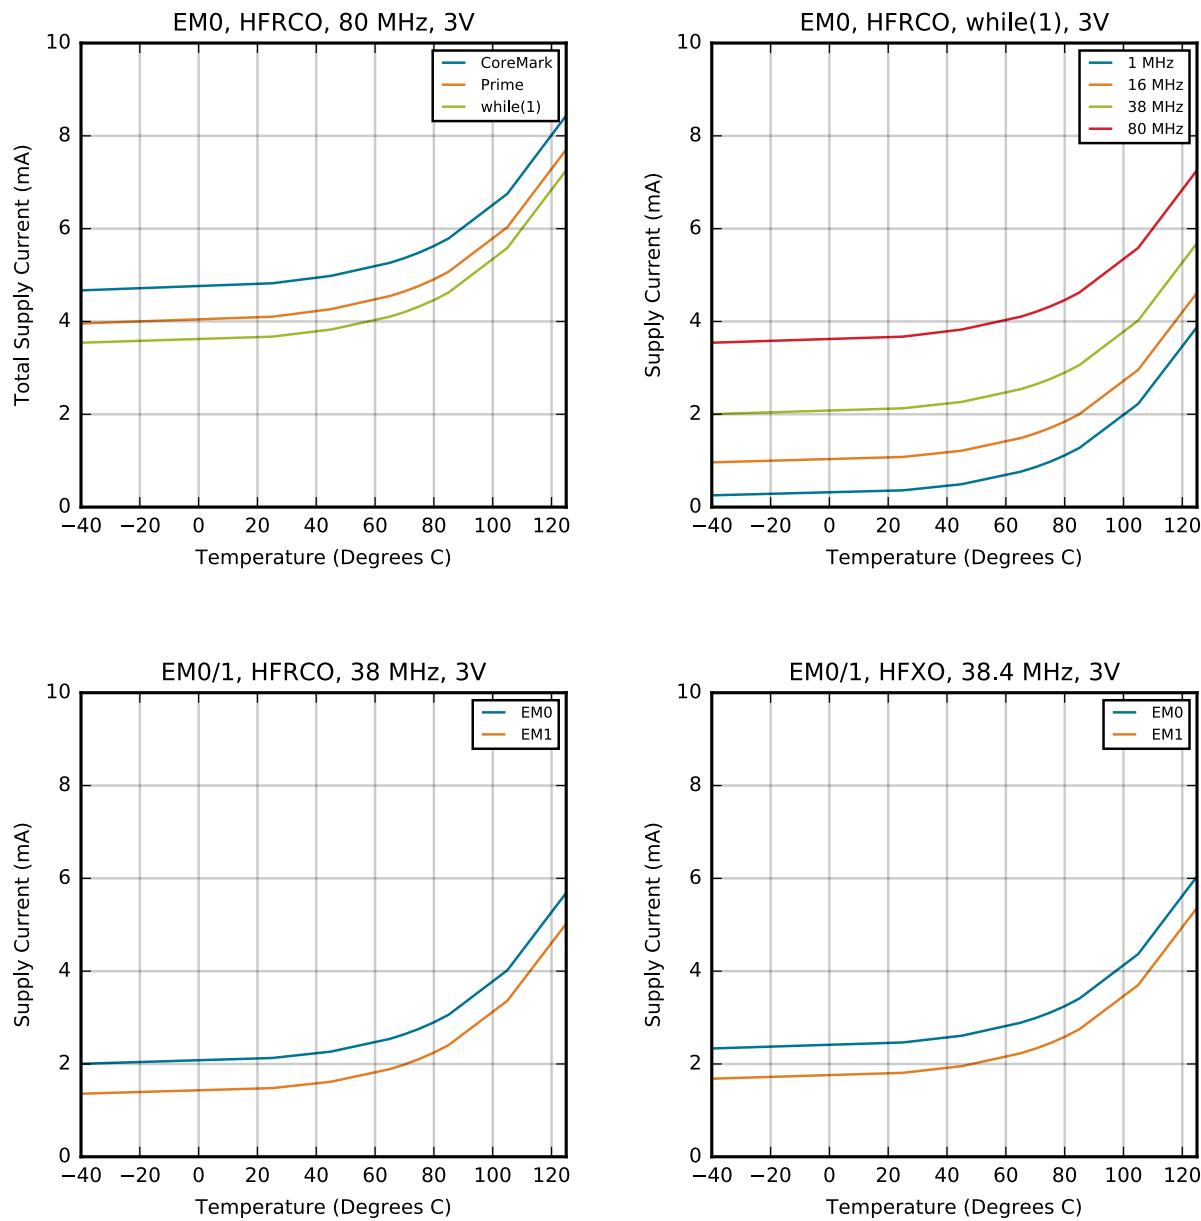


Figure 4.14. EM0 Active Mode Typical Supply Current vs. Temperature

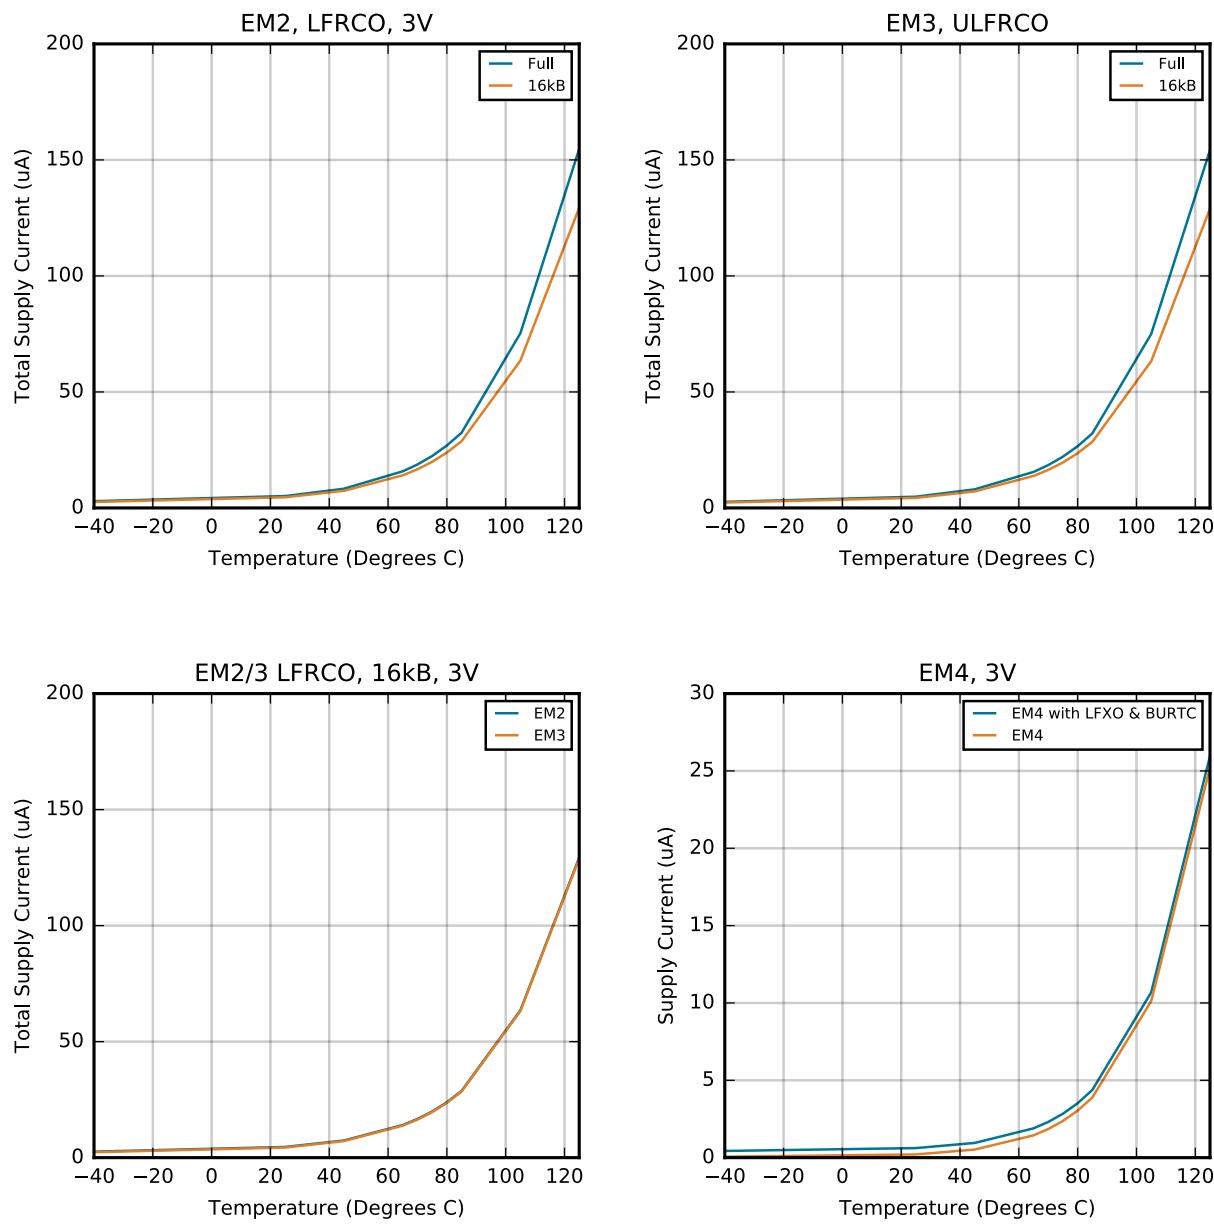


Figure 4.15. EM2, EM3, and EM4 Sleep Mode Typical Supply Current vs. Temperature

4.4.2 2.4 GHz Radio

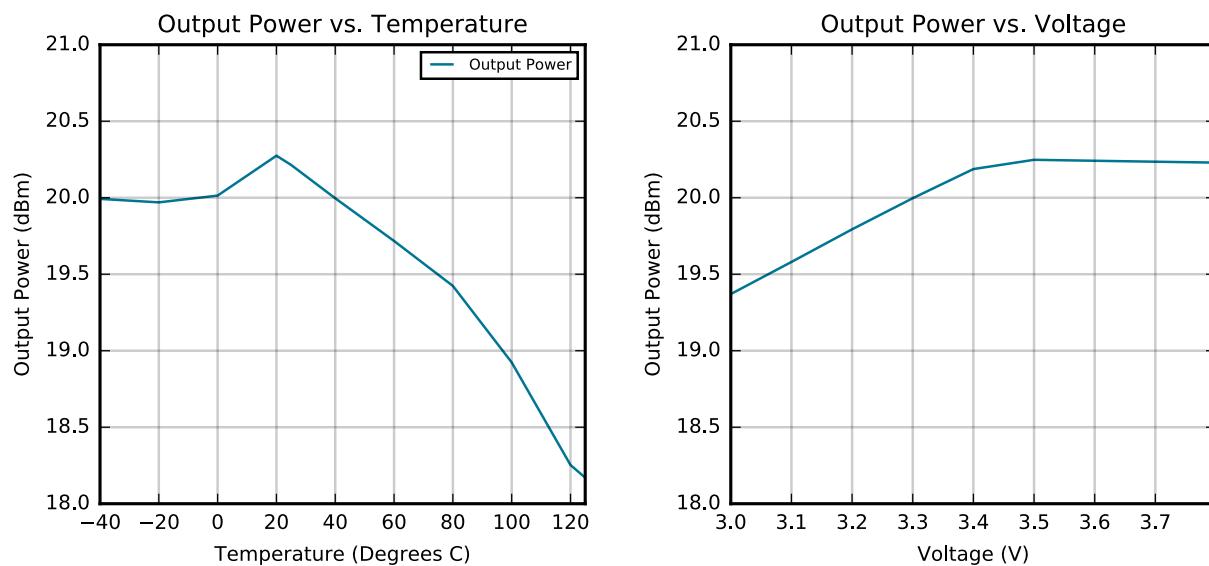


Figure 4.16. 2.4 GHz 20 dBm PA RF Transmitter Output Power

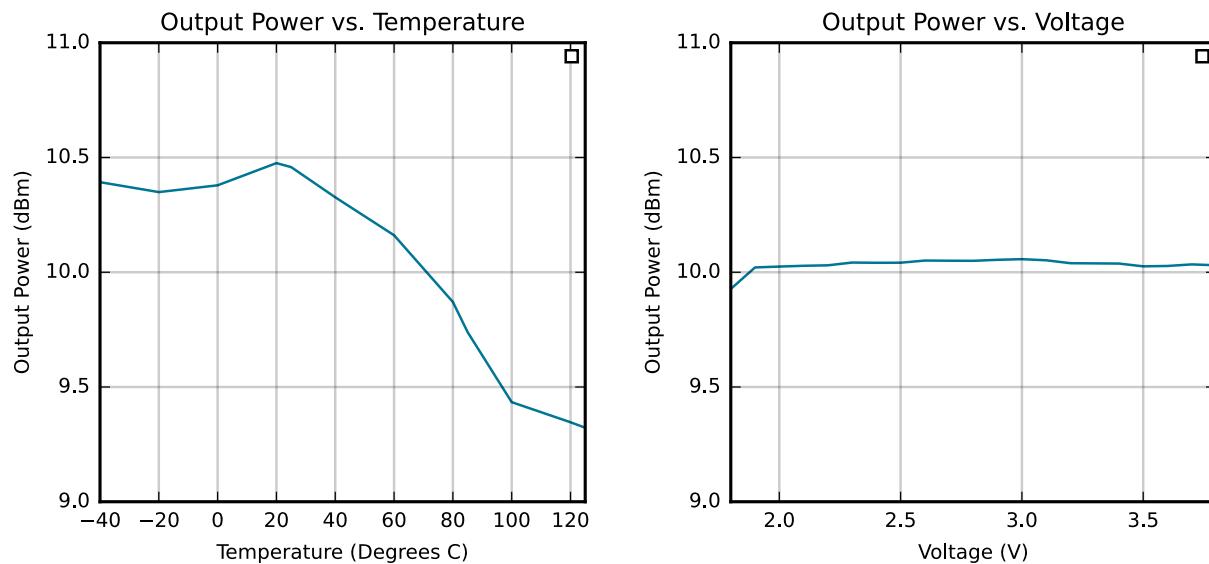


Figure 4.17. 2.4 GHz 10 dBm PA RF Transmitter Output Power

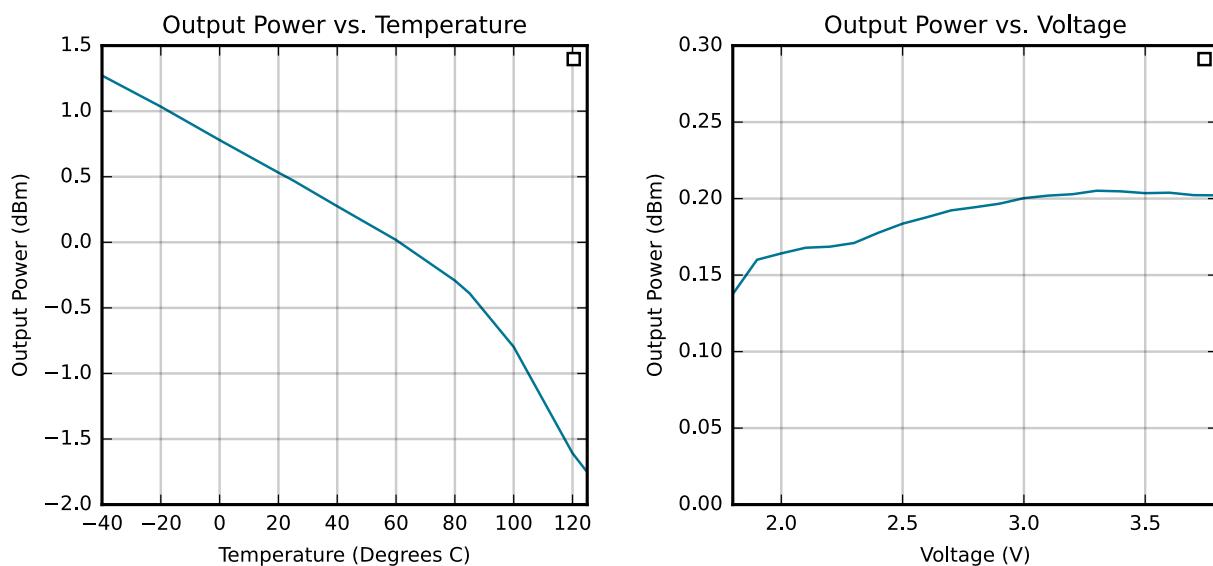


Figure 4.18. 2.4 GHz 0 dBm PA RF Transmitter Output Power

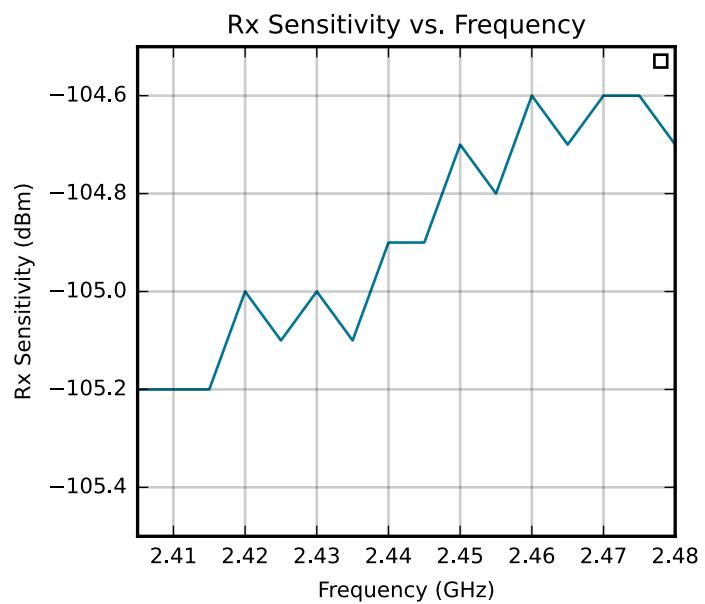


Figure 4.19. 2.4 GHz 802.15.4 RF Receiver Sensitivity

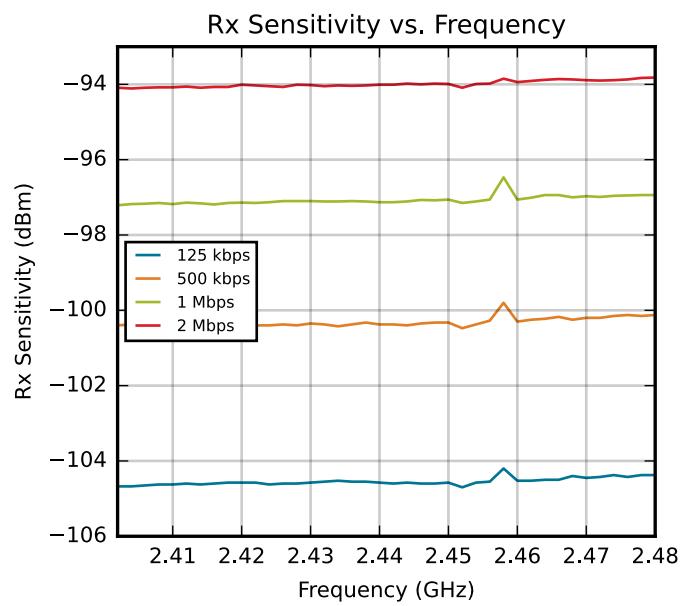


Figure 4.20. 2.4 GHz BLE RF Receiver Sensitivity

5. Typical Connection Diagrams

5.1 Power

Typical power supply connections are shown in the following figure.

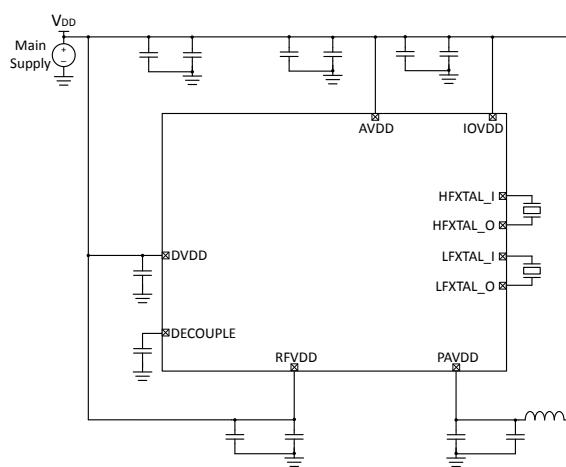


Figure 5.1. EFR32MG21 Typical Application Circuit: Direct Supply Configuration

5.2 RF Matching Networks

RF Matching Network connections are described in the following sub-sections. For more information on matching networks and recommendations, see [AN930.2: EFR32 Series 2 2.4 GHz Matching Guide](#) and [AN928.2: EFR32 Series 2 Layout Design Guide](#).

5.2.1 2.4 GHz 0 dBm Matching Network

The recommended RF matching network circuit diagram for 2.4GHz applications with a transmit power of 0 dBm or less is shown in [Figure 5.2 Typical 0 dBm 2.4 GHz RF impedance-matching network circuit on page 127](#). Typical component values are shown in [Table 5.1 2.4GHz 0 dBm Component Values on page 127](#). Please refer to the development board Bill of Materials for specific part recommendation including tolerance, component size, recommended manufacturer, and recommended part number.

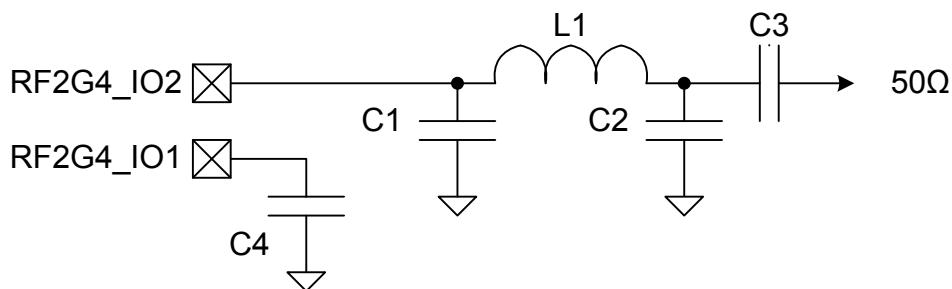


Figure 5.2. Typical 0 dBm 2.4 GHz RF impedance-matching network circuit

Table 5.1. 2.4GHz 0 dBm Component Values

| Designator | Value |
|------------|--------|
| C1 | 1.7 pF |
| C2 | 0.9 pF |
| L1 | 2.0 nH |
| C3 | 2.7 pF |
| C4 | 0.5 pF |

5.2.2 2.4 GHz 10 dBm Matching Network

The recommended RF matching network circuit diagram for 2.4GHz applications with a transmit power of greater than 0 dBm and up to 10 dBm is shown in [Figure 5.3 Typical 10 dBm 2.4 GHz RF impedance-matching network circuit on page 128](#). Typical component values are shown in [Table 5.2 2.4GHz 10 dBm Component Values on page 128](#). Please refer to the development board Bill of Materials for specific part recommendation including tolerance, component size, recommended manufacturer, and recommended part number.

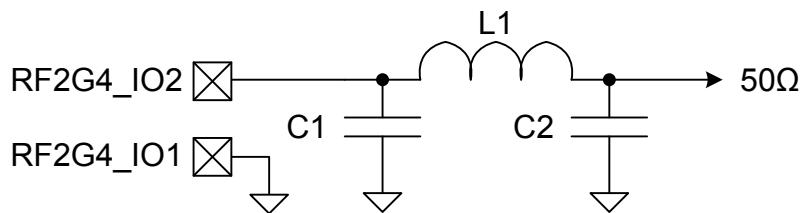


Figure 5.3. Typical 10 dBm 2.4 GHz RF impedance-matching network circuit

Table 5.2. 2.4GHz 10 dBm Component Values

| Designator | Value |
|------------|--------|
| C1 | 1.9 pF |
| L1 | 2.1 nH |
| C2 | 0.9 pF |

5.2.3 2.4 GHz 20 dBm Matching Network

The recommended RF matching network circuit diagram for 2.4 GHz applications is shown in [Figure 5.4 Typical 20 dBm 2.4 GHz RF impedance-matching network circuit on page 128](#). Typical component values are shown in [Table 5.3 2.4 GHz 20 dBm Component Values on page 128](#). Please refer to the development board Bill of Materials for specific part recommendation including tolerance, component size, recommended manufacturer, and recommended part number.

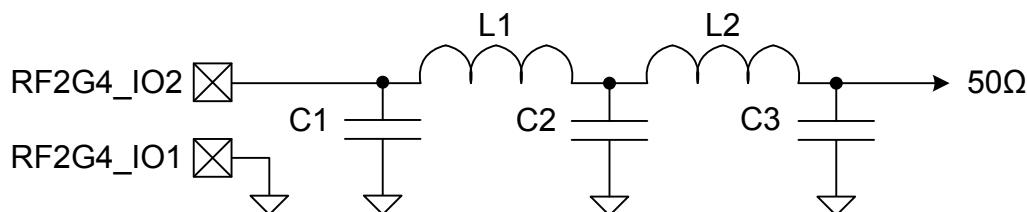


Figure 5.4. Typical 20 dBm 2.4 GHz RF impedance-matching network circuit

Table 5.3. 2.4 GHz 20 dBm Component Values

| Designator | Value |
|------------|--------|
| C1 | 2.3 pF |
| L1 | 2.3 nH |
| C2 | 0.8 pF |
| L2 | 1.1 nH |
| C3 | 0.3 pF |

5.3 Other Connections

Other components or connections may be required to meet the system-level requirements. Application note, [AN0002.2: EFM32 and EFR32 Wireless Gecko Series 2 Hardware Design Considerations](#), contains detailed information on these connections. Application notes can be accessed on the Silicon Labs website (www.silabs.com/32bit-appnotes).

6. Pin Definitions

6.1 QFN32 Device Pinout

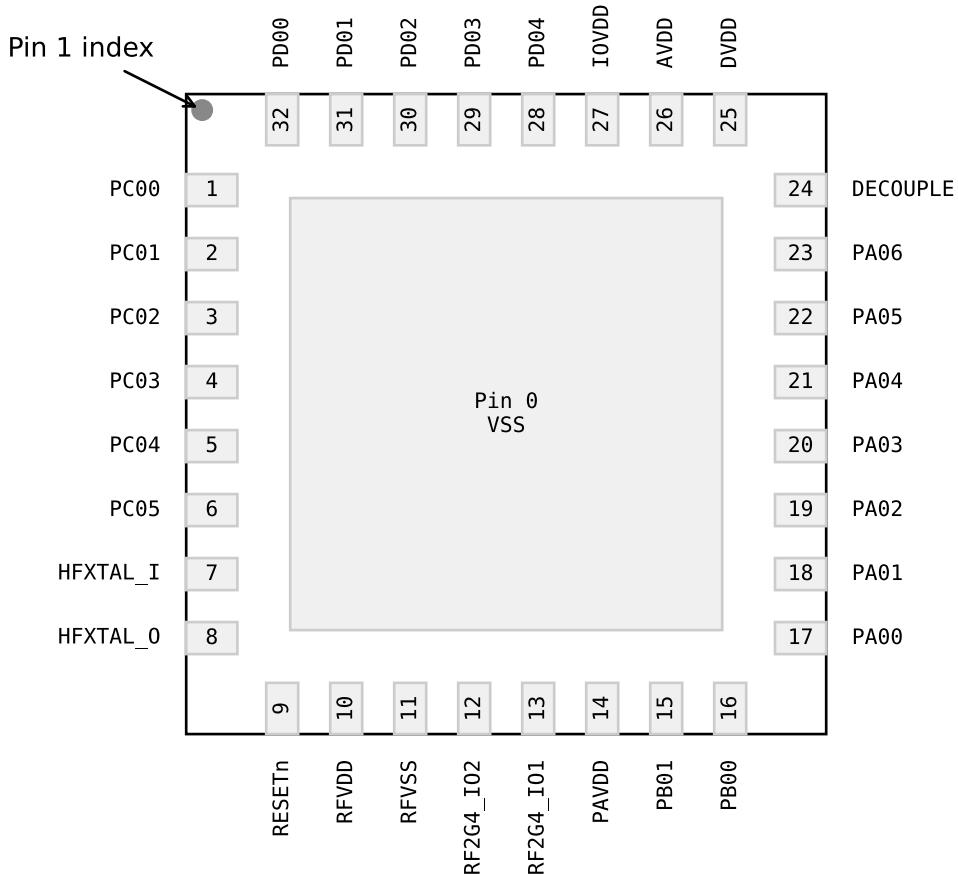


Figure 6.1. QFN32 Device Pinout

The following table provides package pin connections and general descriptions of pin functionality. For detailed information on the supported features for each GPIO pin, see [6.2 Alternate Function Table](#), [6.3 Analog Peripheral Connectivity](#), and [6.4 Digital Peripheral Connectivity](#).

Table 6.1. QFN32 Device Pinout

| Pin Name | Pin(s) | Description | Pin Name | Pin(s) | Description |
|----------|--------|------------------------------|----------|--------|-------------------------------|
| PC00 | 1 | GPIO | PC01 | 2 | GPIO |
| PC02 | 3 | GPIO | PC03 | 4 | GPIO |
| PC04 | 5 | GPIO | PC05 | 6 | GPIO |
| HFXTAL_I | 7 | High Frequency Crystal Input | HFXTAL_O | 8 | High Frequency Crystal Output |
| RESETn | 9 | Reset Pin | RFVDD | 10 | Radio power supply |

| Pin Name | Pin(s) | Description | Pin Name | Pin(s) | Description |
|-----------|--------|--------------------------|-----------|--------|--|
| RFVSS | 11 | Radio Ground | RF2G4_IO2 | 12 | 2.4 GHz RF input/output |
| RF2G4_IO1 | 13 | 2.4 GHz RF input/output | PAVDD | 14 | Power Amplifier (PA) power supply |
| PB01 | 15 | GPIO | PB00 | 16 | GPIO |
| PA00 | 17 | GPIO | PA01 | 18 | GPIO |
| PA02 | 19 | GPIO | PA03 | 20 | GPIO |
| PA04 | 21 | GPIO | PA05 | 22 | GPIO |
| PA06 | 23 | GPIO | DECOPPLE | 24 | Decouple output for on-chip voltage regulator. An external decoupling capacitor is required at this pin. |
| DVDD | 25 | Digital power supply | AVDD | 26 | Analog power supply |
| IOVDD | 27 | Digital IO power supply. | PD04 | 28 | GPIO |
| PD03 | 29 | GPIO | PD02 | 30 | GPIO |
| PD01 | 31 | GPIO | PD00 | 32 | GPIO |

6.2 Alternate Function Table

A wide selection of alternate functionality is available for multiplexing to various pins. The following table shows GPIO pins with support for dedicated functions.

Table 6.2. GPIO Alternate Function Table

| GPIO | Alternate Functions |
|------|---|
| PA00 | IADC0.VREFP |
| PA01 | GPIO.SWCLK |
| PA02 | GPIO.SWDIO |
| PA03 | GPIO.SWV GPIO.TDO GPIO.TRACEDATA0 |
| PA04 | GPIO.TDI GPIO.TRACECLK |
| PA05 | GPIO.EM4WU0 |
| PB01 | GPIO.EM4WU3 |
| PC00 | GPIO.EM4WU6 |
| PC05 | GPIO.EM4WU7 |
| PD00 | LFXO.LFXTAL_O |
| PD01 | LFXO.LFXTAL_I LFXO.LF_EXTCLK |
| PD02 | GPIO.EM4WU9 |

6.3 Analog Peripheral Connectivity

Many analog resources are routable and can be connected to numerous GPIO's. The table below indicates which peripherals are available on each GPIO port. When a differential connection is being used Positive inputs are restricted to the EVEN pins and Negative inputs are restricted to the ODD pins. When a single ended connection is being used positive input is available on all pins. See the device Reference Manual for more details on the ABUS and analog peripherals. Note that some functions may not be available on all device variants.

Table 6.3. ABUS Routing Table

| Peripheral | Signal | PA | | PB | | PC | | PD | |
|------------|---------|------|-----|------|-----|------|-----|------|-----|
| | | EVEN | ODD | EVEN | ODD | EVEN | ODD | EVEN | ODD |
| ACMP0 | ANA_NEG | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | ANA_POS | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| ACMP1 | ANA_NEG | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | ANA_POS | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| IADC0 | ANA_NEG | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | ANA_POS | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |

6.4 Digital Peripheral Connectivity

Many digital resources are routable and can be connected to numerous GPIO's. The table below indicates which peripherals are available on each GPIO port. Note that some functions may not be available on all device variants.

Table 6.4. DBUS Routing Table

| Peripheral.Resource | PORT | | | |
|---------------------|-----------|-----------|-----------|-----------|
| | PA | PB | PC | PD |
| ACMP0.DIGOUT | Available | Available | Available | Available |
| ACMP1.DIGOUT | Available | Available | Available | Available |
| CMU.CLKIN0 | | | Available | Available |
| CMU.CLKOUT0 | | | Available | Available |
| CMU.CLKOUT1 | | | Available | Available |
| CMU.CLKOUT2 | Available | Available | | |
| FRC.DCLK | | | Available | Available |
| FRC.DFRAME | | | Available | Available |
| FRC.DOUT | | | Available | Available |
| I2C0.SCL | Available | Available | Available | Available |
| I2C0.SDA | Available | Available | Available | Available |
| I2C1.SCL | | | Available | Available |
| I2C1.SDA | | | Available | Available |
| LETIMER0.OUT0 | Available | Available | | |
| LETIMER0.OUT1 | Available | Available | | |
| MODEM.ANT0 | Available | Available | Available | Available |
| MODEM.ANT1 | Available | Available | Available | Available |
| MODEM.DCLK | Available | Available | | |
| MODEM.DIN | Available | Available | | |
| MODEM.DOUT | Available | Available | | |
| PRS.ASYNCH0 | Available | Available | | |
| PRS.ASYNCH1 | Available | Available | | |
| PRS.ASYNCH2 | Available | Available | | |
| PRS.ASYNCH3 | Available | Available | | |
| PRS.ASYNCH4 | Available | Available | | |
| PRS.ASYNCH5 | Available | Available | | |
| PRS.ASYNCH6 | | | Available | Available |
| PRS.ASYNCH7 | | | Available | Available |
| PRS.ASYNCH8 | | | Available | Available |
| PRS.ASYNCH9 | | | Available | Available |
| PRS.ASYNCH10 | | | Available | Available |

| Peripheral.Resource | PORT | | | |
|---------------------|-----------|-----------|-----------|-----------|
| | PA | PB | PC | PD |
| PRS.ASYNCH11 | | | Available | Available |
| PRS.SYNCH0 | Available | Available | Available | Available |
| PRS.SYNCH1 | Available | Available | Available | Available |
| PRS.SYNCH2 | Available | Available | Available | Available |
| PRS.SYNCH3 | Available | Available | Available | Available |
| TIMER0.CC0 | Available | Available | Available | Available |
| TIMER0.CC1 | Available | Available | Available | Available |
| TIMER0.CC2 | Available | Available | Available | Available |
| TIMER0.CDTI0 | Available | Available | Available | Available |
| TIMER0.CDTI1 | Available | Available | Available | Available |
| TIMER0.CDTI2 | Available | Available | Available | Available |
| TIMER1.CC0 | Available | Available | Available | Available |
| TIMER1.CC1 | Available | Available | Available | Available |
| TIMER1.CC2 | Available | Available | Available | Available |
| TIMER1.CDTI0 | Available | Available | Available | Available |
| TIMER1.CDTI1 | Available | Available | Available | Available |
| TIMER1.CDTI2 | Available | Available | Available | Available |
| TIMER2.CC0 | Available | Available | | |
| TIMER2.CC1 | Available | Available | | |
| TIMER2.CC2 | Available | Available | | |
| TIMER2.CDTI0 | Available | Available | | |
| TIMER2.CDTI1 | Available | Available | | |
| TIMER2.CDTI2 | Available | Available | | |
| TIMER3.CC0 | | | Available | Available |
| TIMER3.CC1 | | | Available | Available |
| TIMER3.CC2 | | | Available | Available |
| TIMER3.CDTI0 | | | Available | Available |
| TIMER3.CDTI1 | | | Available | Available |
| TIMER3.CDTI2 | | | Available | Available |
| USART0.CLK | Available | Available | Available | Available |
| USART0.CS | Available | Available | Available | Available |
| USART0.CTS | Available | Available | Available | Available |
| USART0.RTS | Available | Available | Available | Available |
| USART0.RX | Available | Available | Available | Available |
| USART0.TX | Available | Available | Available | Available |
| USART1.CLK | Available | Available | | |

| Peripheral.Resource | PORT | | | |
|---------------------|-----------|-----------|-----------|-----------|
| | PA | PB | PC | PD |
| USART1.CS | Available | Available | | |
| USART1.CTS | Available | Available | | |
| USART1.RTS | Available | Available | | |
| USART1.RX | Available | Available | | |
| USART1.TX | Available | Available | | |
| USART2.CLK | | | Available | Available |
| USART2.CS | | | Available | Available |
| USART2.CTS | | | Available | Available |
| USART2.RTS | | | Available | Available |
| USART2.RX | | | Available | Available |
| USART2.TX | | | Available | Available |

7. QFN32 Package Specifications

7.1 QFN32 Package Dimensions

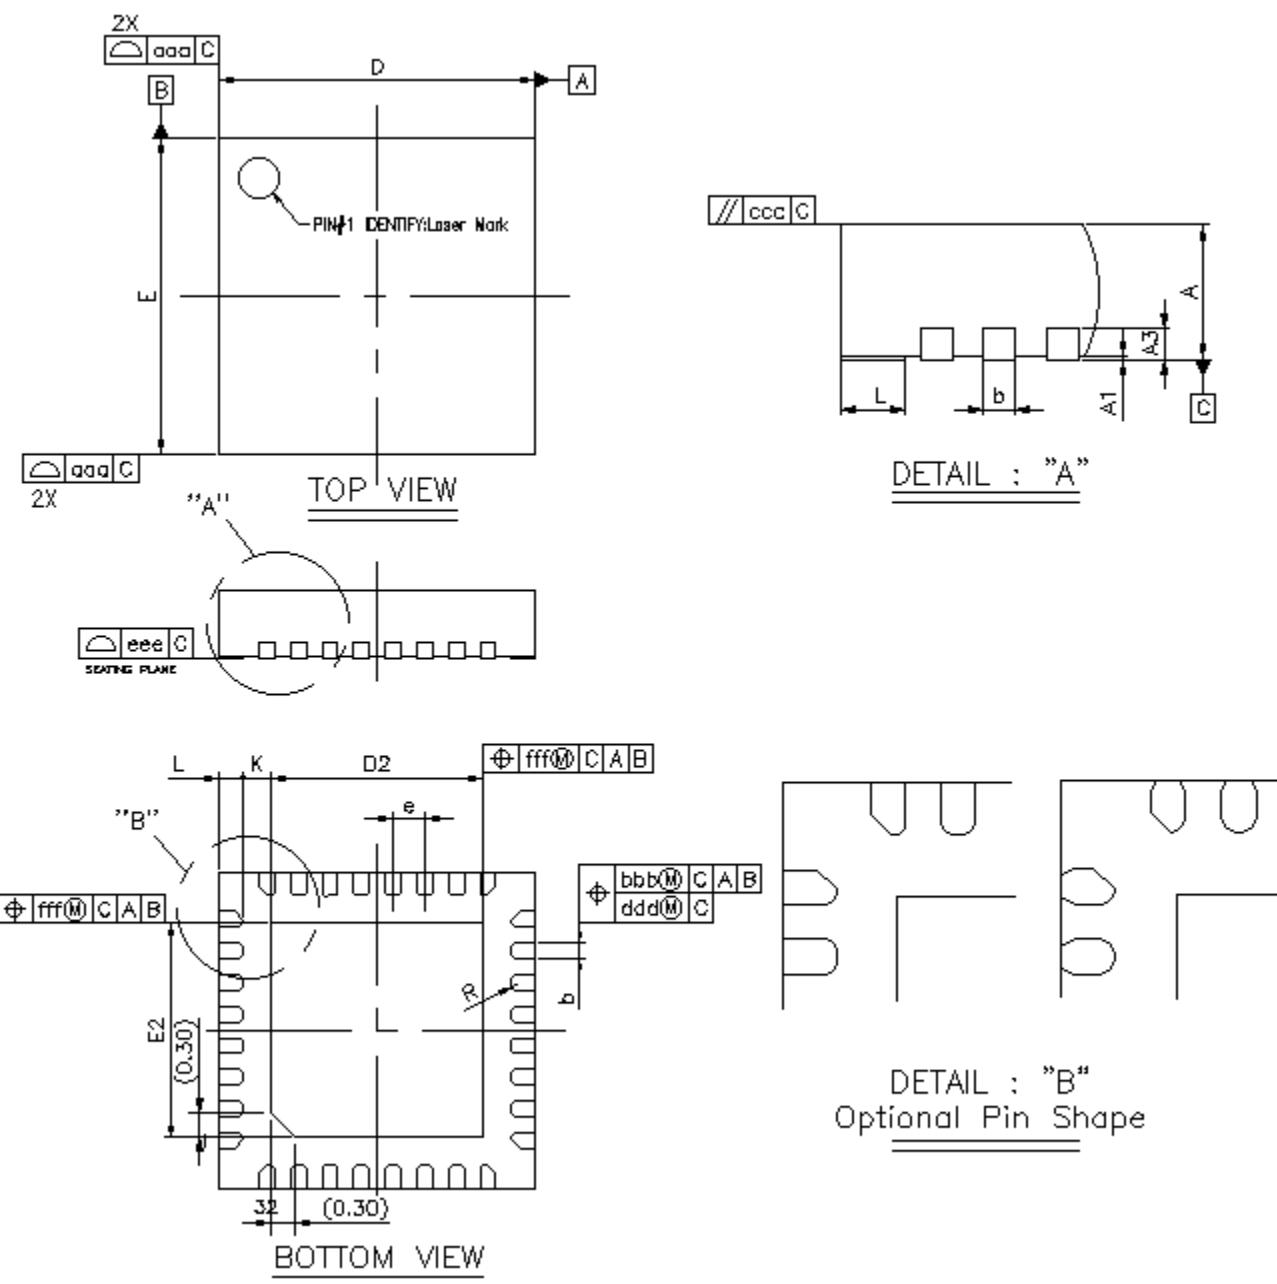


Figure 7.1. QFN32 Package Drawing

Table 7.1. QFN32 Package Dimensions

| Dimension | Min | Typ | Max |
|-----------|----------|------|-------|
| A | 0.80 | 0.85 | 0.90 |
| A1 | 0.00 | 0.02 | 0.05 |
| A3 | 0.20 REF | | |
| b | 0.15 | 0.20 | 0.25 |
| D | 3.90 | 4.00 | 4.10 |
| E | 3.90 | 4.00 | 4.10 |
| D2 | 2.60 | 2.70 | 2.80 |
| E2 | 2.60 | 2.70 | 2.80 |
| e | 0.40 BSC | | |
| L | 0.20 | 0.30 | 0.40 |
| K | 0.20 | — | — |
| R | 0.075 | — | 0.125 |
| aaa | 0.10 | | |
| bbb | 0.07 | | |
| ccc | 0.10 | | |
| ddd | 0.05 | | |
| eee | 0.08 | | |
| fff | 0.10 | | |

Note:

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. Dimensioning and Tolerancing per ANSI Y14.5M-1994.
3. This drawing conforms to the JEDEC Solid State Outline MO-220, Variation VKKD-4.
4. Recommended card reflow profile is per the JEDEC/IPC J-STD-020 specification for Small Body Components.

7.2 QFN32 PCB Land Pattern

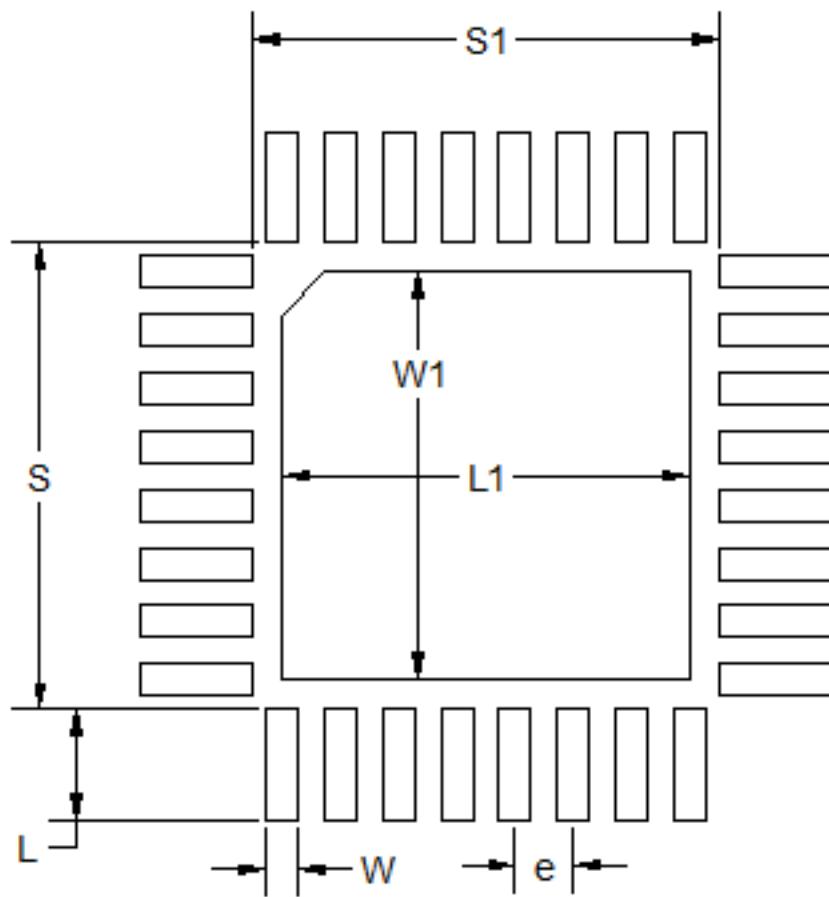


Figure 7.2. QFN32 PCB Land Pattern Drawing

Table 7.2. QFN32 PCB Land Pattern Dimensions

| Dimension | Typ |
|-----------|------|
| L | 0.76 |
| W | 0.22 |
| e | 0.40 |
| S | 3.21 |
| S1 | 3.21 |
| L1 | 2.80 |
| W1 | 2.80 |

Note:

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. This Land Pattern Design is based on the IPC-7351 guidelines.
3. All metal pads are to be non-solder mask defined (NSMD). Clearance between the solder mask and the metal pad is to be 60 μm minimum, all the way around the pad.
4. A stainless steel, laser-cut and electro-polished stencil with trapezoidal walls should be used to assure good solder paste release.
5. The stencil thickness should be 0.101 mm (4 mils).
6. The ratio of stencil aperture to land pad size can be 1:1 for all perimeter pads.
7. A 2x2 array of 1.10 mm x 1.10 mm openings on a 1.30 mm pitch can be used for the center ground pad.
8. A No-Clean, Type-3 solder paste is recommended.
9. The recommended card reflow profile is per the JEDEC/IPC J-STD-020 specification for Small Body Components.
10. **Above notes and stencil design are shared as recommendations only. A customer or user may find it necessary to use different parameters and fine tune their SMT process as required for their application and tooling.**

7.3 QFN32 Package Marking

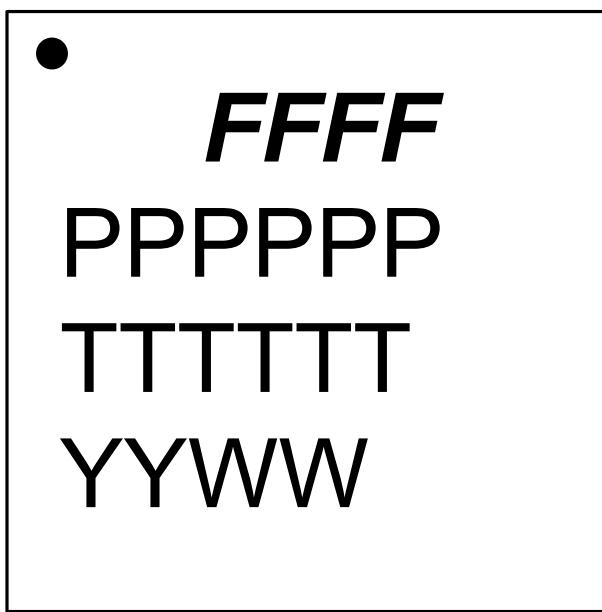


Figure 7.3. QFN32 Package Marking

The package marking consists of:

- FFFF – The product family codes.
 1. Family Code (B | M | F)
 2. G (Gecko)
 3. Series (2)
 4. Device Configuration (1, 2, 3, ...)
- PPPPPP – The product option codes.
 - 1-2. MCU Feature Codes
 - 3-4. Radio Feature Codes
 - 5. Flash (J = 1024k | I = 768k | H = 512k | W= 352k | G = 256k | F = 128k)
 - 6. Temperature grade (G = -40 to 85 °C | I = -40 to 125 °C)
- TTTTTT – A trace or manufacturing code. The first letter is the device revision.
- YY – The last 2 digits of the assembly year.
- WW – The 2-digit workweek when the device was assembled.

8. Revision History

Revision 1.2

May, 2024

- Merged document with EFR32MG21 Revision D datasheet.
- Corrected the lowest energy mode for LETIMER to EM3 in front page block diagram.
- **1. Feature List:** Changed number of 16-bit Timer/Counter modules to 3 and added Secure Vault High features.
- **2. Ordering Information:**
 - Added Revision B Secure Vault High OPNs.
 - Added all Revision D OPNs.
 - Added note regarding Bluetooth 5.x support.
 - Added Ordering Code Key.
 - Removed Protocol Stack Column.
- **3.5.2 Low Energy Timer (LETIMER):** Corrected lowest energy mode to EM3.
- Updated terminology to use inclusive lexicon.
- **3.7 Secure Vault Features:** Added Secure Vault Features table and added Secure Vault High features.
- **Table 3.2 Configuration Summary on page 16:** Added TIMER3 and updated lowest energy mode for I2C0 to EM3.
- **4.1 Electrical Characteristics for Revision B:** Added Power Supply Pin Dependencies section.
- Added section **4.3 Electrical Characteristics for Revision D** with all Revision D specifications.
- **4.1.1 Absolute Maximum Ratings:** Added "DC voltage on RESETn pin" specification and added note regarding RESETn pin's pullup to DVDD.
- **4.1.2 General Operating Conditions:** Added External Clock Input and DLL Reference Clock maximum specifications.
- **4.1.5.1.4 RF Transmitter Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate:** Corrected condition for In-band spurious emissions specification for P_{outMAX} from "+/- 2 MHz" to "+/- 4 MHz".
- **4.1.7 Energy Mode Wake-up and Entry Times:** Changed units for "Wake-up time from EM1" specification from "AHB Clocks" to "HCLKs".
- **4.1.8.1 High Frequency Crystal Oscillator:** Added note to clarify "Startup Time" specification.
- **4.1.9 GPIO Pins (3V GPIO pins):**
 - Added "RESETn" test condition for V_{IL} , V_{IH} , and R_{PULL} specifications.
 - Updated test condition for V_{OL} and V_{OH} from "IOVDD = 1.62 V" to "IOVDD = 1.71 V".
 - Added "RESETn low time to ensure pin reset" specification.
- **4.1.10 Analog to Digital Converter (ADC):**
 - Added 0.5x, 1x, 2x, 3x, and 4x gain test conditions for maximum "ADC clock frequency" specification.
 - Added f_{ADC_CLK} to test conditions for "Gain Error, Normal mode" specification.
 - Added note regarding pin voltage limitations.
 - Removed the condition for IADC resolution.
- **4.1.11 Analog Comparator (ACMP):** Added note regarding deprecated Capacitive Sensing feature.
- **4.1.14.1 USART SPI Main Timing and 4.1.15.1 USART SPI Secondary Timing:**
 - Added timing diagrams.
 - Corrected references of "HPERCLK" to "PCLK".
 - Corrected references of "V_{DD}" to "I/O supply".
- Added **4.1.17 Boot Timing**, **4.1.19 Crypto Operation Average Current for SE Manager API**, and **4.1.18 Crypto Operation Timing for SE Manager API**.
- **5.2 RF Matching Networks:**
 - Added references to matching guide and layout design guide appnotes.
 - Corrected 2G4RF1 and 2G4RF2 to RF2G4_IO1 and RF2G4_IO2.
- **Table 6.2 GPIO Alternate Function Table on page 131:** Added VREFP pin.
- Fixed minor typos throughout the document.

Revision 1.1

September, 2019

- Updated the block diagram in the front page with new security features.
- Updated [1. Feature List](#) with new security features.
- Replaced 'Standard' with 'Secure Element' under the Security column in [2. Ordering Information](#).
- Replaced Security Accelerator with Crypto Accelerator in [Figure 3.1 Detailed EFR32MG21 Block Diagram on page 8](#).
- Updated [3.7 Secure Vault Features](#) with more detailed information.
- Replaced 'ADC' with 'IADC' in [3.8.2 Analog to Digital Converter \(IADC\)](#).
- Added the payload size under the Test Conditions of the parameter Sensitivity in [Table 4.16 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate on page 37](#) and [Table 4.17 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate on page 38](#)
- Corrected the units in [Table 5.3 2.4 GHz 20 dBm Component Values on page 128](#).
- Added PC00 to [Table 6.2 GPIO Alternate Function Table on page 131](#).
- Fixed minor typos throughout the document.

Revision 1.0

March, 2019

- Added Minimum and Maximum values to electrical specification tables.
- Updated BLE 125k and 500 kbps RF specifications to reflect latest silicon.
- Updated 20 dBm Tx RF specifications to reflect latest silicon.
- Added typical Curves.
- Added RF Matching networks.
- Updated RF specifications to reflect latest silicon.
- Updated typical specification values to reflect latest silicon.
- Wording, spelling, and grammar fixes.

Revision 0.5

February, 2019

- Added Flash electrical specification table.
- Added typical specification values for 20 dBm and 0 dBm PAs.
- Updated typical specification values for RF current consumption to reflect latest silicon.
- Wording, spelling, and grammar fixes.

Revision 0.42

January, 2019

- Updated typical values for all parameters, including RF parameters.
- Updated specification tables to reflect updated specification list.
- Wording, spelling, and grammar fixes.
- Synchronized revisions for all datasheets in device family.

Revision 0.4

July, 2018

- Updated specification tables to reflect updated specification list and inserted new specification tables.
- Updated typical values for key parameters.
- Wording, spelling, and grammar fixes.

Revision 0.1

May, 2018

Initial Release

Simplicity Studio

One-click access to MCU and wireless tools, documentation, software, source code libraries & more. Available for Windows, Mac and Linux!



IoT Portfolio

www.silabs.com/IoT



SW/HW

www.silabs.com/simplicity



Quality

www.silabs.com/quality



Support & Community

www.silabs.com/community

Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice to the product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Without prior notification, Silicon Labs may update product firmware during the manufacturing process for security or reliability reasons. Such changes will not alter the specifications or the performance of the product. Silicon Labs shall have no liability for the consequences of use of the information supplied in this document. This document does not imply or expressly grant any license to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any FDA Class III devices, applications for which FDA premarket approval is required or Life Support Systems without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons. Silicon Labs disclaims all express and implied warranties and shall not be responsible or liable for any injuries or damages related to use of a Silicon Labs product in such unauthorized applications.

Note: This content may contain offensive terminology that is now obsolete. Silicon Labs is replacing these terms with inclusive language wherever possible. For more information, visit www.silabs.com/about-us/inclusive-lexicon-project

Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, EFM®, EFM32®, EFR, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Redpine Signals®, WiSeConnect, n-Link, ThreadArch®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, Gecko OS, Gecko OS Studio, Precision32®, Simplicity Studio®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri, the Zentri logo and Zentri DMS, Z-Wave®, and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. Wi-Fi is a registered trademark of the Wi-Fi Alliance. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc.
400 West Cesar Chavez
Austin, TX 78701
USA

www.silabs.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF System on a Chip - SoC category:

Click to view products by Silicon Labs manufacturer:

Other Similar products are found below :

[BCM43236BKMLG](#) [CYBL10463-56LQXI](#) [BCM4322KFBGH](#) [CYW43455XKUBGT](#) [EFR32BG27C320F768GJ39-BR](#)
[EFR32BG24B310F1536IJ42-BR](#) [CYW20820A1KFBG](#) [CYBL10463-56LQXIT](#) [ATWILC1000-MR1100B](#) [EM3585-RT](#) [NCH-RSL10-101Q48-ABG](#) [BLUENRG-248](#) [AX-SFJK-API-1-01-TX30](#) [BLUENRG-232](#) [BLUENRG-234](#) [EFR32MG12P432F1024GL125-C](#)
[EFR32BG12P432F1024GL125-C](#) [ESP8266EX](#) [CYBL10561-56LQXI](#) [ATM2202-011](#) [ATM2231-000](#) [ATM2221-010](#) [ATM2201-011](#)
[ATM3231-000](#) [ATM3201-011](#) [ATM3221-010](#) [ATM3202-011](#) [TLSR8232F512ET24](#) [TLSR8355F128ET24](#) [TLSR8366ET24](#)
[TLSR8232F128ET24](#) [TLSR8251F512ET24](#) [DA14531-00000FX2](#) [DA14580-01A32](#) [DA14580-01AT2](#) [DA14581-00UNA](#) [DA14680-01F08A92](#) [DA14681-01000U22](#) [DA16200-00000A32](#) [DA16200-00000F22](#) [ESP32-S2FN4R2](#) [ESP32-S3FN8](#) [ESP32-C3FH4](#) [ESP32-C3](#)
[ESP32-C3FH4X](#) [ESP32-C6FH8](#) [ESP32-D0WDQ6](#) [ESP32-D0WDQ6-V3](#) [ESP32-D0WD-V3](#) [ESP32-PICO-V3](#)