


VL53L1X nucleo pack with X-NUCLEO-53L1A1 expansion board and STM32F401RE nucleo board

Data brief

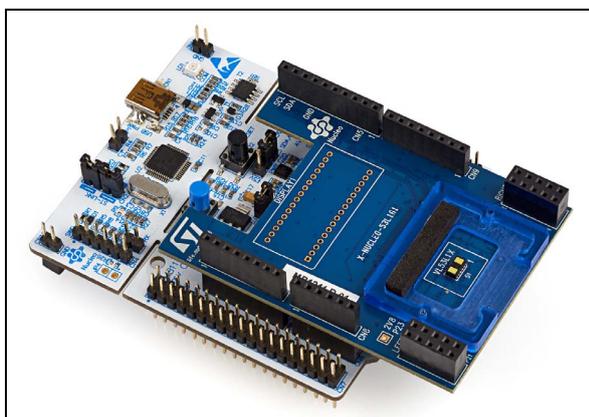

Features


- VL53L1X Time-of-Flight (ToF), long-distance ranging sensor expansion board (X-NUCLEO-53L1A1)
- STM32F401RE nucleo board
- Two VL53L1X breakout boards
- 0.25, 0.5 and 1 mm height spacers to simulate air gaps
- Two different cover windows
- Equipped with an Arduino UNO R3 connector
- RoHS compliant
- The two VL53L1X breakout boards can be connected onto the X-NUCLEO-53L1A1 expansion board to integrate the VL53L1X into the customer's application
- Full system SW is supplied, including code examples and graphical user interface. All this can be downloaded from the folder "TOOLS AND SOFTWARE, section Ecosystem" on www.st.com/VL53L1X

Description

The P-NUCLEO-53L1A1 is a complete evaluation kit allowing anyone to learn, evaluate, and develop their application using the VL53L1X ToF, long-distance ranging sensor technology.

The VL53L1X is the latest product based on ST's patented FlightSense™ technology. This is a ground-breaking technology allowing absolute long-distance distance to be measured independently of target reflectance. Instead of estimating the distance by measuring the amount of light reflected back from an object (which is significantly influenced by color and surface), the VL53L1X precisely measures the time the light takes to travel to the nearest object and reflect back to the sensor (Time-of-Flight).

The STM32 nucleo board, NUCLEO-F401RE, provides an affordable and flexible way for users to try out new ideas and build prototypes with any STM32 microcontroller, choosing from the various combinations of performance, power consumption, and features.



1 X-NUCLEO-53L1A1 expansion board

The board allows the user to test the VL53L1X functionality, to program it, and to help understand how to develop an application using the device. It integrates:

- A 2.8 V regulator to supply the VL53L1X on the expansion board and two breakout boards.
- Two level shifters to adapt the I/O level to the main board of the microcontroller
- The necessary connectivity for the application

The NUCLEO-F401RE board has to be programmed to control the X-NUCLEO-53L1A1 expansion board. The required software suite is available on www.st.com/VL53L1X and is composed of the STSW-LINK009, STSW-LINK7, and X-CUBE-53L1A1.

The X-NUCLEO-53L1A1 expansion board and the NUCLEO-F401RE board are connected through four Arduino compatible connectors: CN5, CN6, CN8, and CN9. They are shown in [Figure 3](#) and described in [Table 1](#) and [Table 2](#).

The Arduino connectors on the NUCLEO-F401RE board support Arduino Uno revision 3.

Figure 1. Arduino connector layout on the X-NUCLEO-53L1A1 expansion board

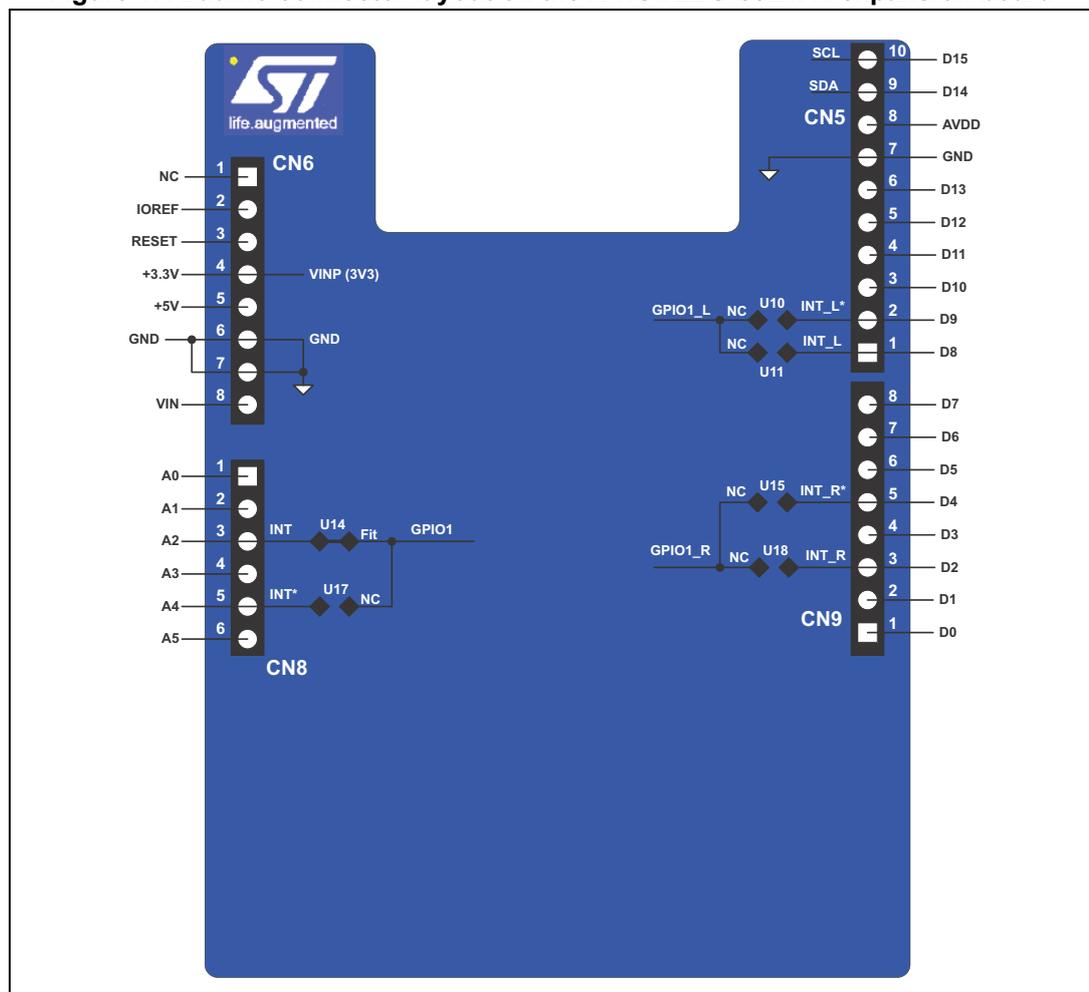


Table 1. Left connector of the Arduino on the NUCLEO-F401RE board

CN number	VL53L1X expansion board	Pin number	Pin name	MCU pin	X-NUCLEO-53L1A1 expansion board function	
CN6 power		1	NC	NC	Not used	
		2		IOREF		
		3		RESET		
		Power	4	3V3	3V3	3.3 V supply
			5	NC	5 V	Not used
		Gnd	6	Gnd	Gnd	Gnd
			7			
		8	NC	VIN	Not used	
CN8 analog		1	NC	PA0	Not used	
		2		PA1		
		GPIO1	3	INT	PA4	Interrupt signal from VL53L1X on-board soldered device
			4	NC	PB0	Not used
		GPIO1	5	INT*	PC1 ⁽¹⁾	By default not used Interrupt signal from VL53L1X on-board soldered device
			6	NC	PC0	Not used

1. Depends on STM32 nucleo board solder bridges (see details in the nucleo documentation). These interrupt signals are duplicated, but not used. This offers hardware connection flexibility in case of conflict on MCU interface, when the expansion board is superposed with other expansion boards. In this case, remove the solder drop from the used interrupt and instead fit the solder drop in "NC".

Table 2. Right connector of the Arduino on the NUCLEO-F401RE board

CN number	VL53L1X expansion board	Pin number	Pin name	MCU pin	X-NUCLEO-53L1A1 expansion board function	
CN5 digital	SCL	10	D15	PB8	I2C1_SCL	
	SDA	9	D14	PB9	I2C1_SDA	
		8	NC	AVDD	Not used	
	Gnd	7	Gnd	Gnd	Gnd	
		6	INT_L	PA5	Not used	
		5	NC	PA6		
		4		PA7		
		3		PB6		
		GPIO1_L	2	INT_L*	PC7	By default not used Interrupt signal from optional VL53L1X left breakout board ⁽¹⁾
			1	INT_L	PA9	By default not used Interrupt signal from optional VL53L1X left breakout board ⁽¹⁾
CN9 digital		8	NC	PA8	Not used	
		7	NC	PB10		
		6	NC	PB4		
	GPIO1_R	5	INT_R*	PB5	By default not used Interrupt signal from optional VL53L1X right breakout board ⁽¹⁾	
		4	NC	PB3	Not used	
	GPIO1_R	3	INT_R	PA10	By default not used Interrupt signal from optional VL53L1X right breakout board ⁽¹⁾	
		2	NC	PA2	Not used	
		1	NC	PA3		

1. These interrupt signals are duplicated, but not used by default, this offers hardware connection of the breakout board VL53L1X interrupt signals and flexibility in case of conflict on MCU interface management when expansion board is superposed with other expansion boards. In this case select, through a solder drop, the MCU port which is free.

2 NUCLEO-F401RE board


Information about the NUCLEO-F401RE board can be found at: <http://www.st.com/stm32nucleo>.

3 Optional VL53L1X breakout boards

The VL53L1X breakout boards can be directly plugged onto the X-NUCLEO-53L1A1 expansion board through two 10 pin connectors or they can be connected to the board through flying leads.

When connected through flying leads, developers should break off the mini PCB from the breakout board, and use only the “VL53L1X mini PCB” which is smaller and integrates more easily into the customer’s devices.

Figure 2. Connections of VL53L1X breakout boards

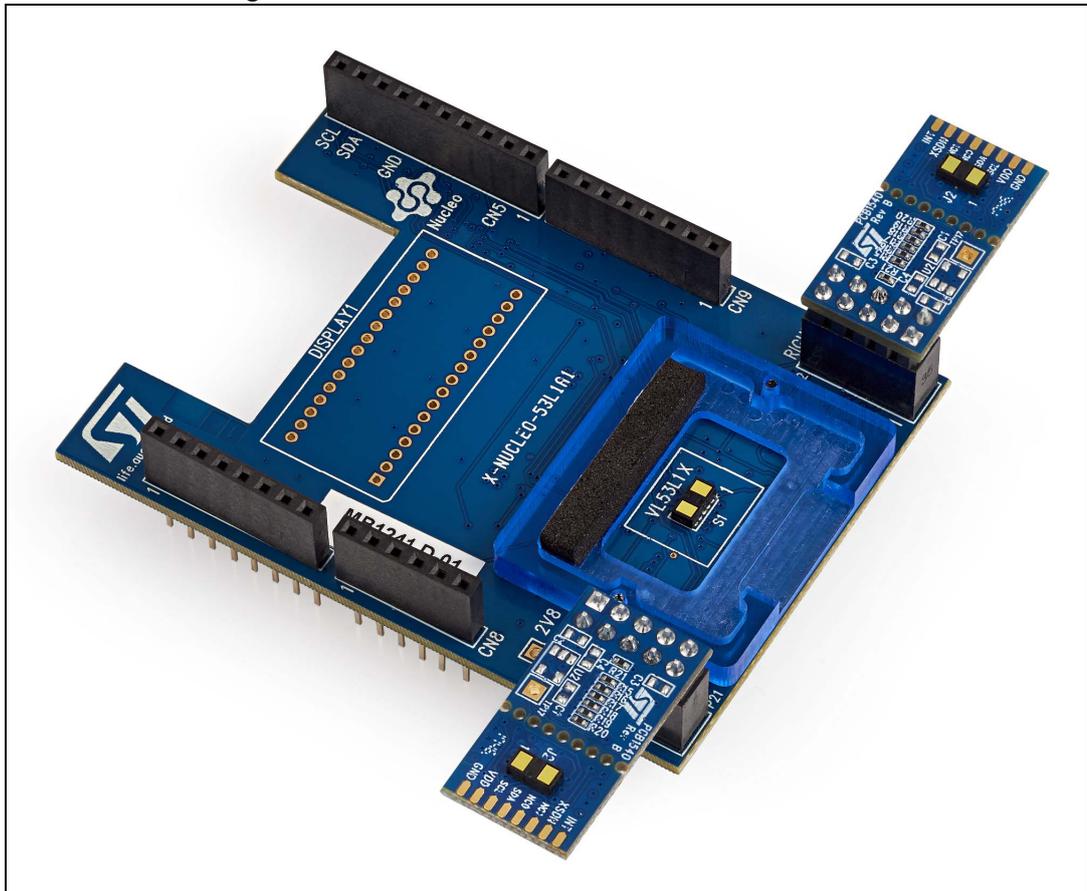

4 Laser considerations

The VL53L1X contains a laser emitter and corresponding drive circuitry. The laser output is designed to remain within Class 1 laser safety limits under all reasonably foreseeable conditions including single faults, in compliance with IEC 60825-1:2014 (third edition). The laser output remains within Class 1 limits as long as STMicroelectronics' recommended device settings are used and the operating conditions specified in the datasheet are respected. The laser output power must not be increased by any means and no optics should be used with the intention of focusing the laser beam.

Figure 3. Class 1 laser product label



5 ECOPACK®

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

6 Ordering information

Table 3. Ordering code

Order code	Description
P-NUCLEO-53L1A1	X-NUCLEO-53L1A1 and NUCLEO-F401RE boards

7 Revision history

Table 4. Document revision history

Date	Revision	Changes
02-Feb-2018	1	Initial release
15-Feb-2018	2	Updated Features Replaced “satellite boards” with “breakout boards” Replaced Figure 2: Connections of VL53L1X breakout boards .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Distance Sensor Development Tool](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[SEN0004](#) [MIKROE-2509](#) [172](#) [DFR0315](#) [SEN0006](#) [SEN0007](#) [SEN0008](#) [SEN0187](#) [SEN0202](#) [SEN0208](#) [DM160234](#) [SEN0143](#) [3316](#) [SEN-08504](#) [SEN-08502](#) [DFR0445](#) [3317](#) [984](#) [SEN0014](#) [SEN0001](#) [SEN0171](#) [3942](#) [979](#) [981](#) [982](#) [985](#) [AFBR-S50MV85G-EK](#) [TMF8701-DB](#) [TMF8801-DB](#) [TMF8801-EVM](#) [AD8283CP-EBZ](#) [AD8285CP-EBZ](#) [ADUX1020-EVAL-SDP](#) [SEN0245](#) [EVALBGT24LTR22TOBO1](#) [DM160238](#) [MIKROE-3339](#) [MIKROE-3439](#) [MIKROE-1589](#) [MIKROE-1991](#) [MIKROE-2086](#) [MIKROE-3103](#) [SECO-RANGEFINDER-GEVK](#) [PIM058](#) [PIM062](#) [PIM373](#) [101020083](#) [101020353](#) [101020532](#) [101020617](#)