



TAOGLAS®



Datasheet

Part No:
SGGP124B

Description

GPS/GLONASS/GALILEO/BEIDOU Ceramic Patch SMD Antenna

Features:

SMD Mount Ceramic Patch Antenna
GPS/GLONASS/GALILEO/BEIDOU

Coverage:

- B1I: 1561 MHz
- L1: 1575.42 MHz
- G1: 1602 MHz

Dimensions: 12 x 12 x 4mm

Includes additional solder mask

RoHS & Reach Compliant

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	6
4.	Packaging	7
5.	Antenna Integration Guide	8
6.	Antenna Characteristics	15
7.	Radiation Patterns	19
8.	Solder Reflow Profile	23
<hr/>		
	Changelog	24

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland & USA
ISO 9001:2015
Certified



Taiwan
ISO 9001:2015
Certified



1. Introduction



The SSGP124B is a compact ceramic GPS/GLONASS/GALILEO/BEIDOU passive patch antenna, measuring just 12mm x 12mm with a low-profile height of 4mm. Its small form factor makes it ideal for space-constrained applications such as compact telematics devices, vehicle tracking and fleet management systems, wearables, and navigation devices.

The antenna is optimized for a 50mm x 50mm ground plane, operating at 1575.42MHz, 1602MHz and 1561MHz with a peak gain of 0.72dBi gain, 1.17dBi gain-5.06dBi gain. Designed for SMT mounting, the ceramic patch includes an additional solder mask to enhance durability and prevent cracking due to heat expansion during high-volume, cost-sensitive assembly processes.

Typical applications include:

- Vehicle Tracking and Fleet Management Systems
- Wearables
- Navigation Devices

The SSGP Series can be manufactured in a TS16949 first-tier automotive-approved facility and tested to AEC-Q200 certification if required. Further to this, full PPAP and IMDS documentation can be provided upon request. Please discuss your quality and reliability requirements with our team prior to ordering.


Taoglas also offers custom tuning services based on minimum order quantities, contact your regional Taoglas customer support team for further information.

GNSS Electrical			
Frequency (MHz)	B1I – 1561 MHz	L1/E1 - 1575.42 MHz	G1 – 1602 MHz
	1559-1565	1565-1586	1596-1610
Efficiency (%)	8.6	28.4	31.6
Average Gain (dB)	-10.67	-5.47	-5.01
Peak Gain (dBi)	-5.06	0.72	1.17
Polarization	RHCP		
Impedance	50 Ω		
*Tested 50x50mm Ground Plane			


Mechanical	
Dimensions	12mm x 12mm x 4 mm
Weight	2.3g ± 3%
Material	Ceramic

Environmental	
Operation Temperature	-40°C to 105°C
Storage Temperature	-40°C to 105°C
Relative Humidity	Non-condensing 65°C 95% RH
Moisture Sensitivity	3 (168 Hours)


3. Mechanical Drawing

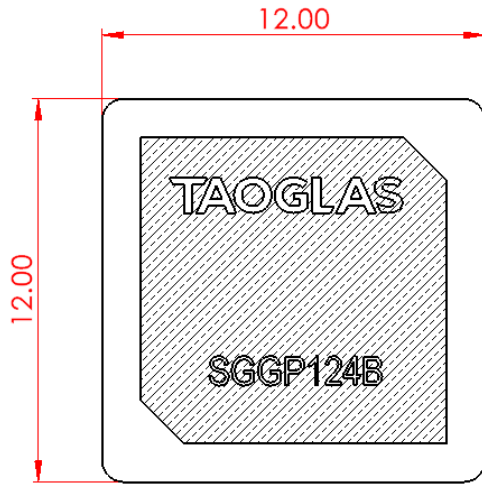




TOP

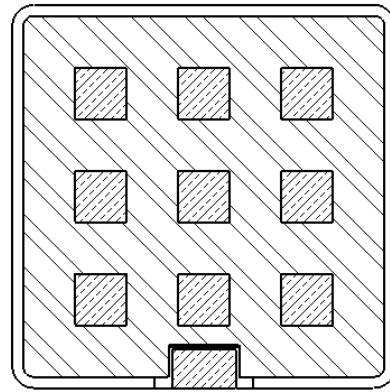

BOTTOM

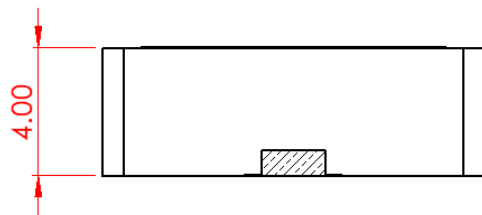

SIDE


-  SILVER
-  CERAMIC
-  SOLDER MASK

4. Packaging

500 pcs/ Vacuum bag



500 pcs / Box
 Box: 350x340x67mm
 Weight: 2.4 ±3% Kg

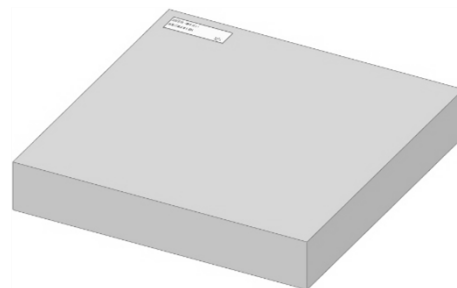

2000 pcs / Carton
 Carton: 370x370x300mm
 Weight: 10.5 ±3% Kg



5. Antenna Integration Guide

The following is an example on how to integrate the SGGP124B into a design. This antenna has 10 pins, where one pin is used for the RF Feed. Taoglas recommends using a minimum of 50x50mm ground plane (PCB) to ensure optimal performance.



Top view of PCB reference design.

5.1 Schematic and Symbol Definition




Above is a 3D model of the SGGP124B on a PCB reference design.


The circuit symbol for the SGGP124B is shown below. The antenna has 10 pins as indicated below.

TAOGLAS_SGGP124B ANT1

Pin	Description
1	RF Feed
2-10	Ground

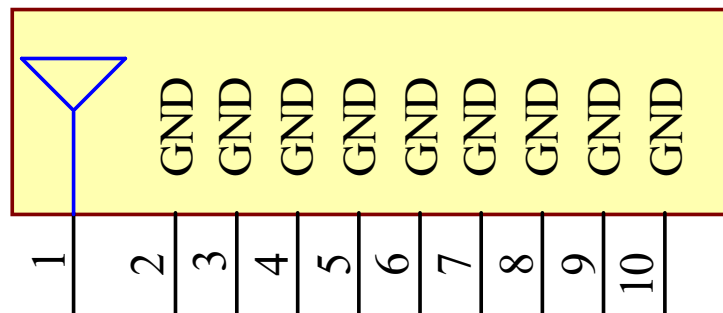


5.2 Antenna Footprint

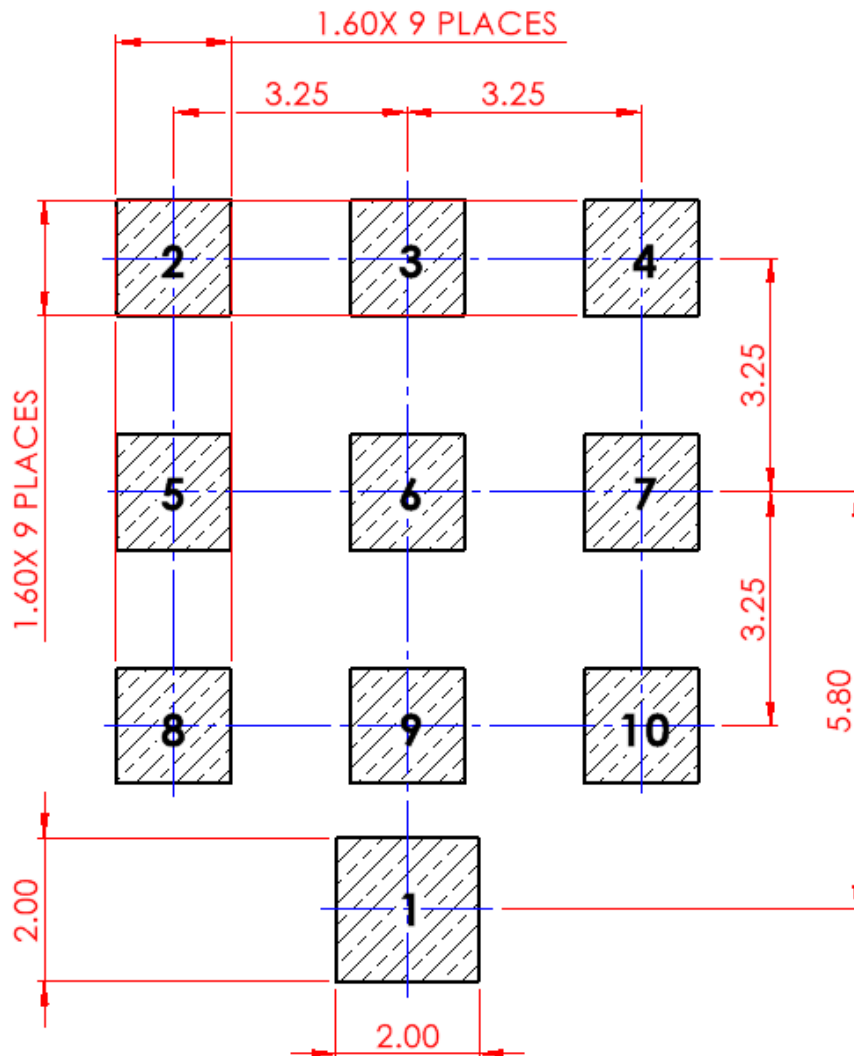


Pin	Description
1	RF Feed
2-10	Ground

5.3 Top Solder Paste

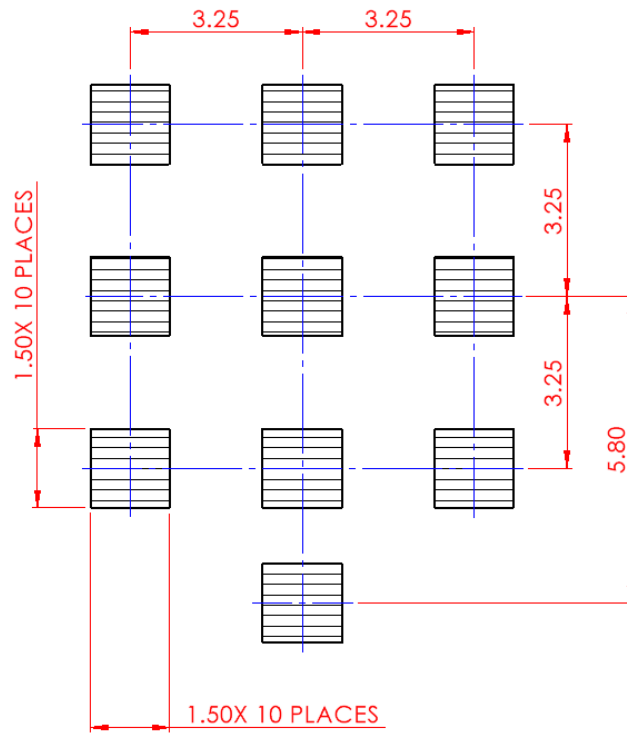


5.4 Top Solder Mask

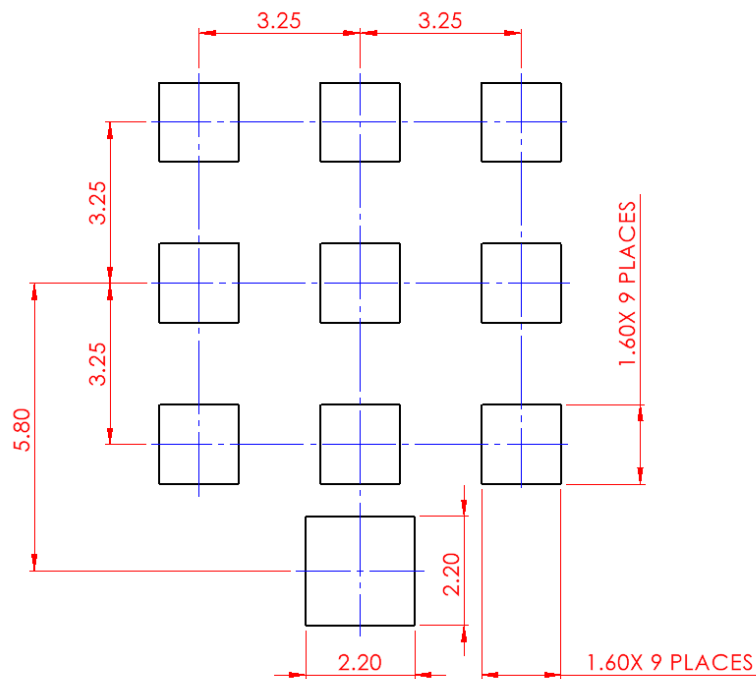

5.5 Copper Clearance for SGGP124B


The footprint and clearance on the PCB must comply with the antenna's specification. The PCB layout shown in the diagrams below demonstrates the SGGP124B clearance area. The copper keep out area applies to the top layer and all internal layers.

There should be a 3mm copper clearance area around RF Feed pad.

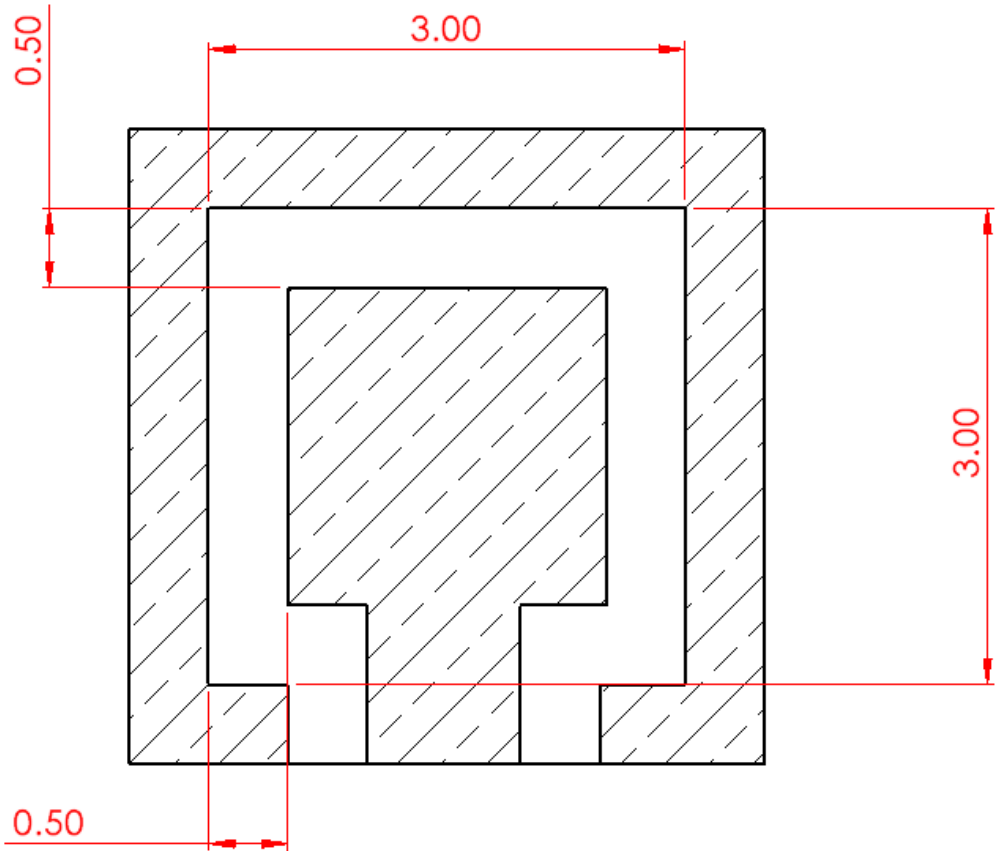

5.6 Antenna Integration


The SGGP124B should be placed at the centre of the PCB, to take advantage of the ground plane. The RF trace must maintain a 50 Ohm transmission line. Ground vias should be placed around the RF trace.

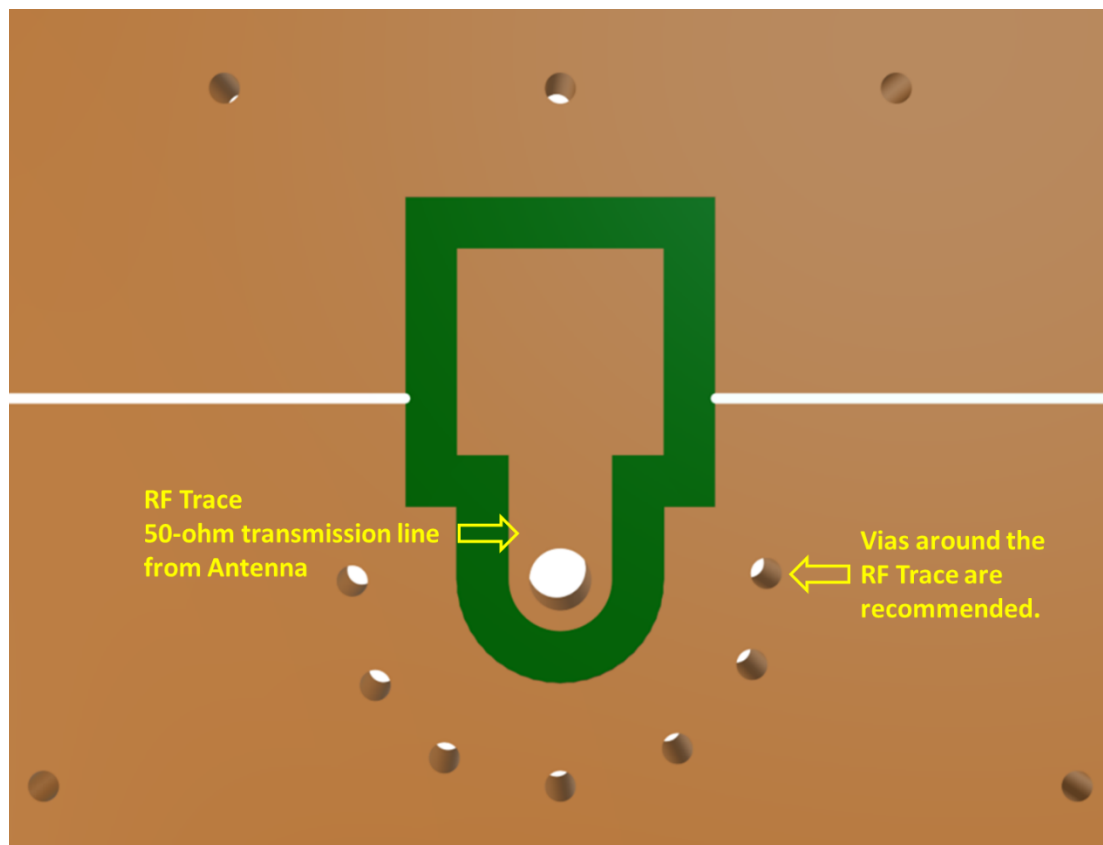


SGGP124B antenna mounted on a PCB reference design, showing transmission lines and integration notes.

5.7 Final Integration

The top side image shown below highlights the antenna transmission line. Taoglas recommends using a minimum of 50x50mm ground plane (PCB) to ensure optimal performance.

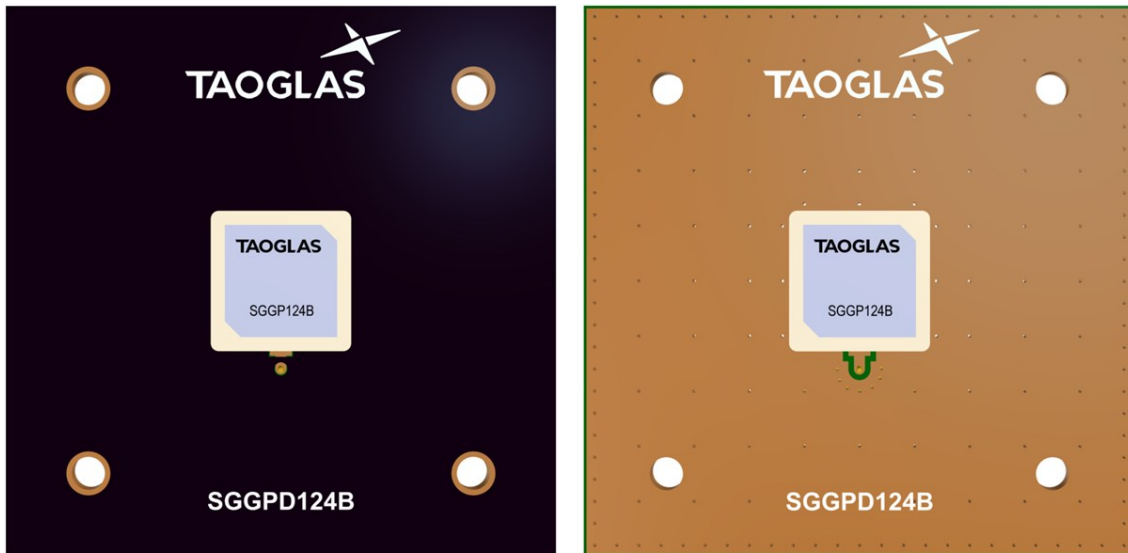



Top Side (SGGP124B placement on 50x50mm PCB reference design)

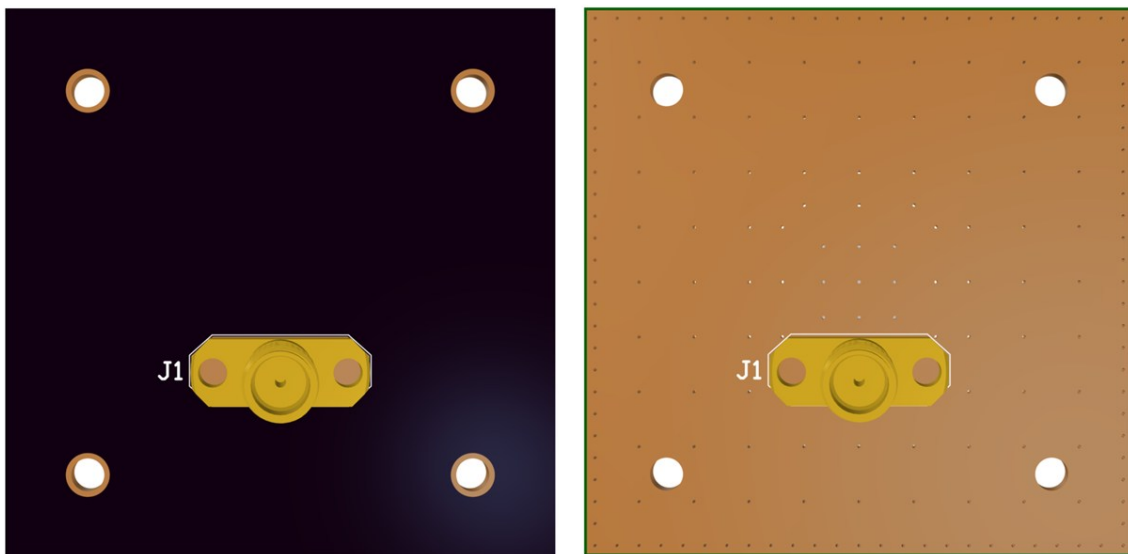

Bottom Side


6. Antenna Characteristics

6.1 Test Setup

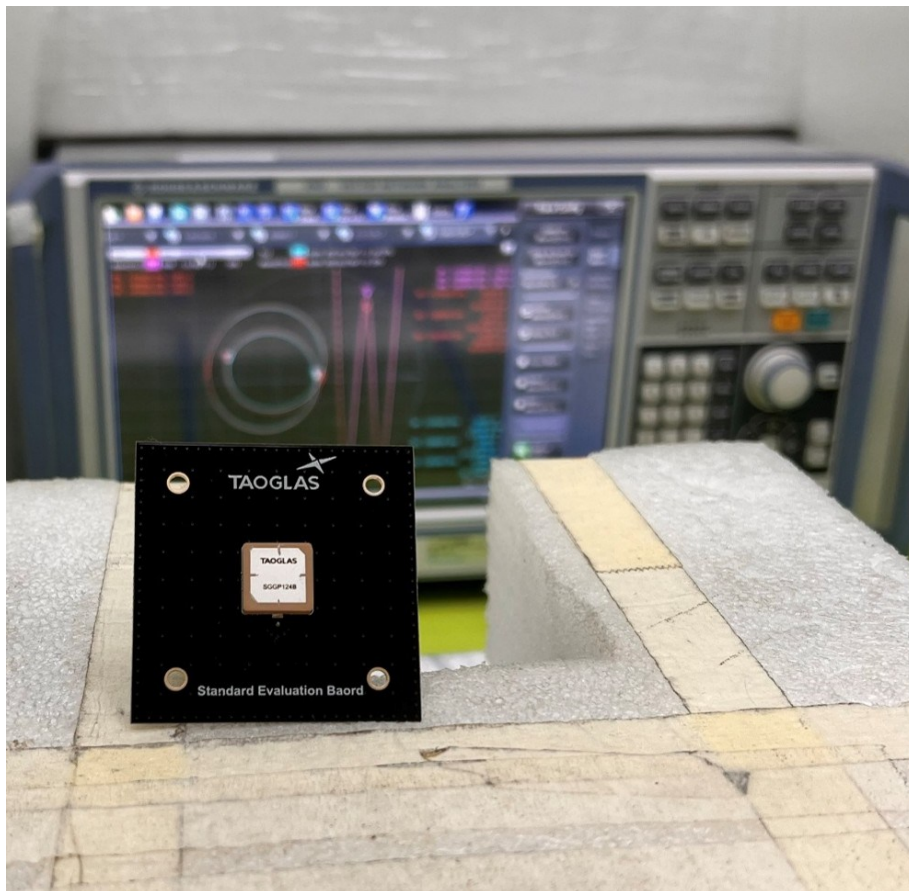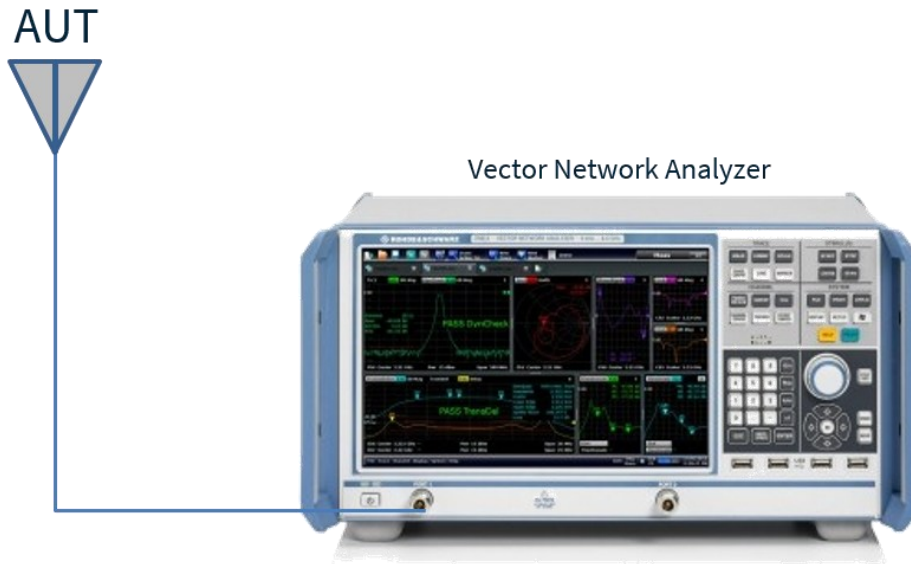


VNA Test Set-up


6.2 Return Loss

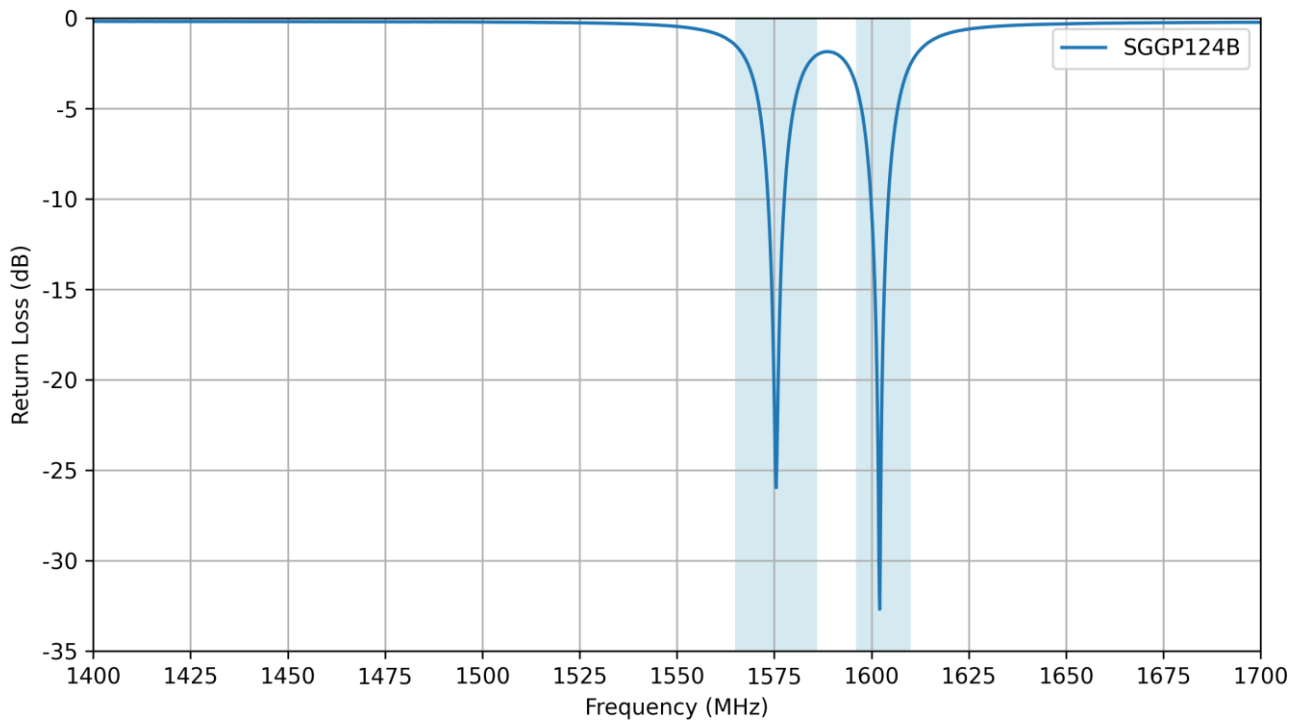


6.3 VSWR

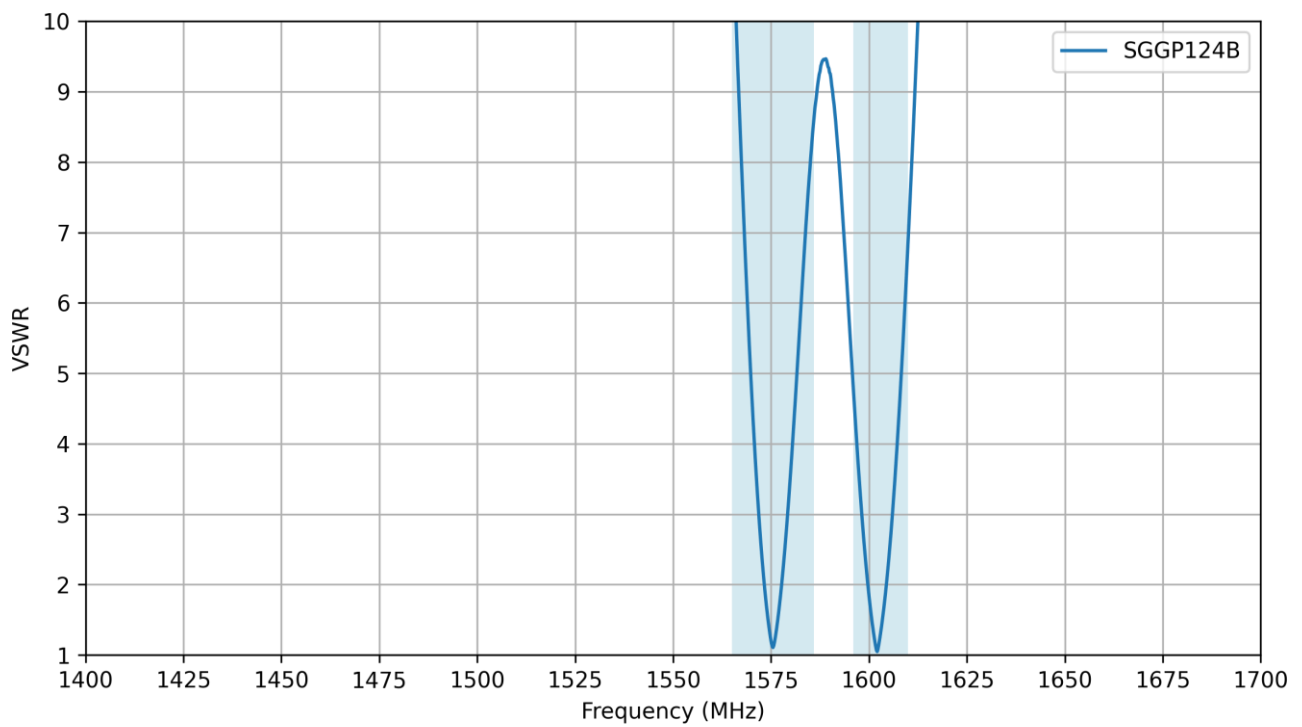


6.4 Efficiency

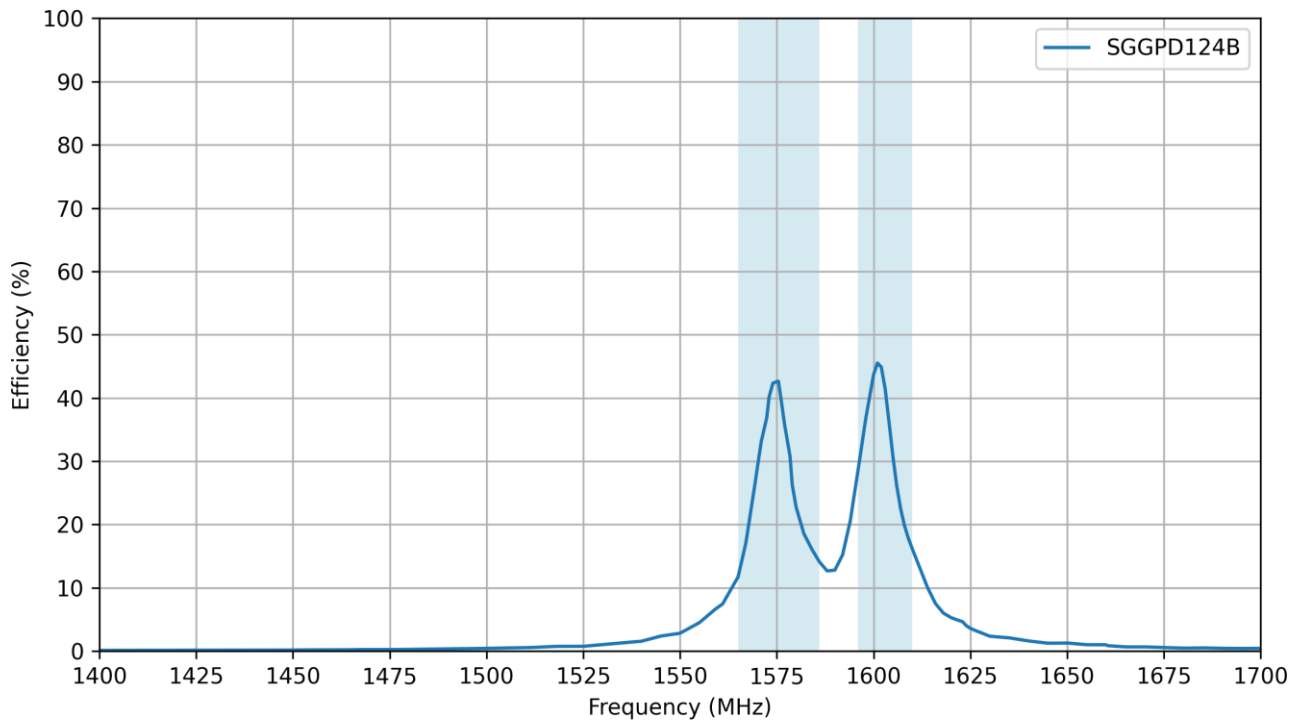


6.5 Average Gain

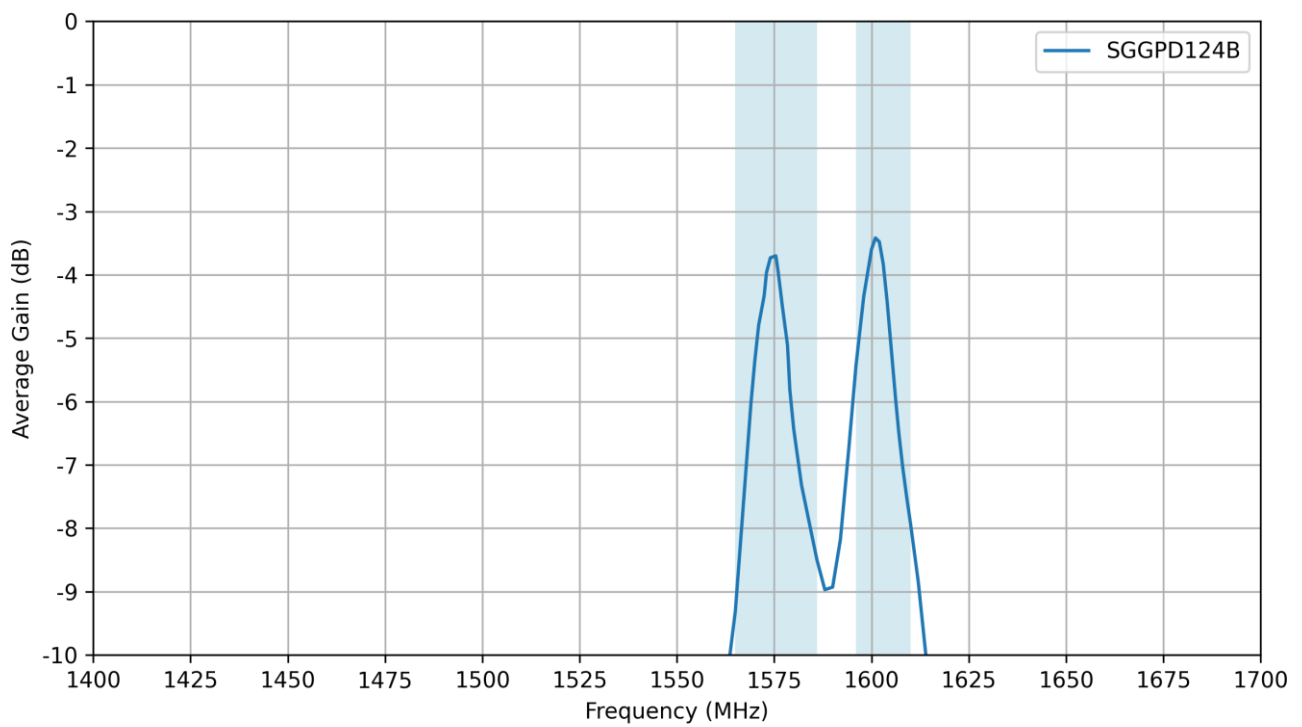

6.6 Peak Gain

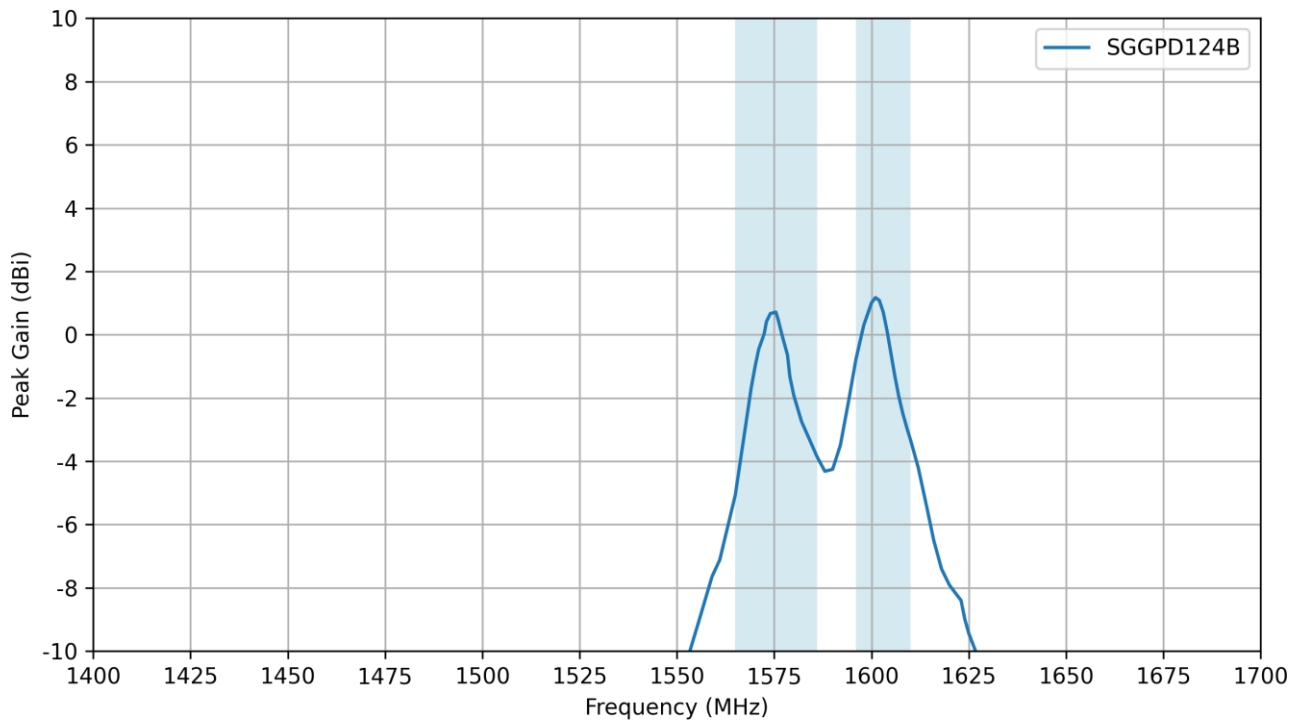


6.7 Axial Ratio

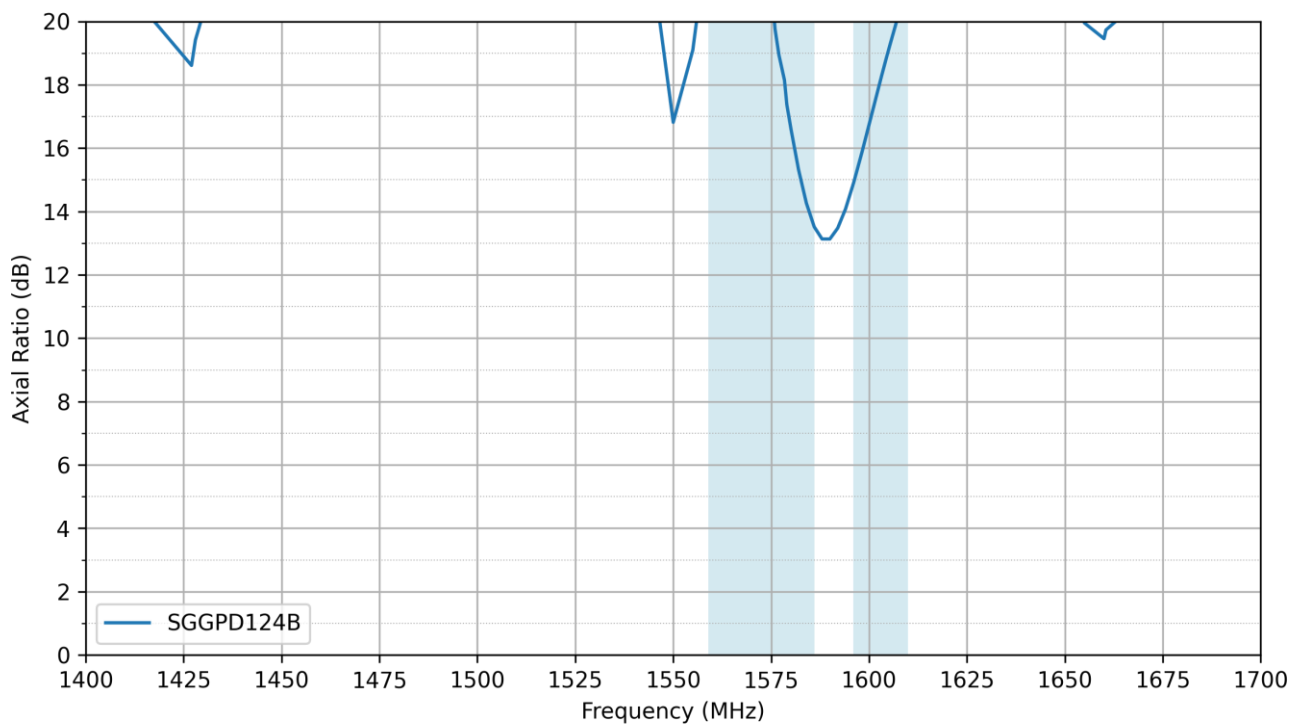



7. Radiation Patterns

7.1 Test Setup


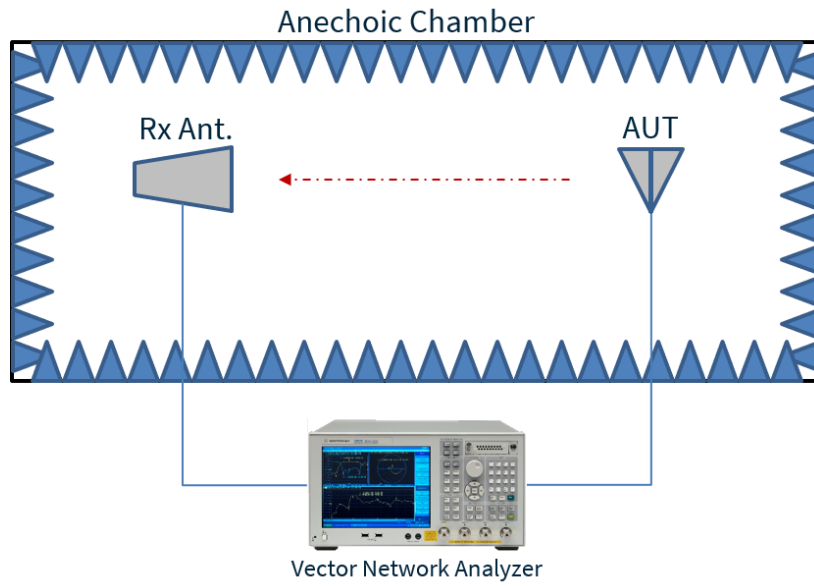


Chamber Test Set-up



7.2 Patterns at 1561 MHz

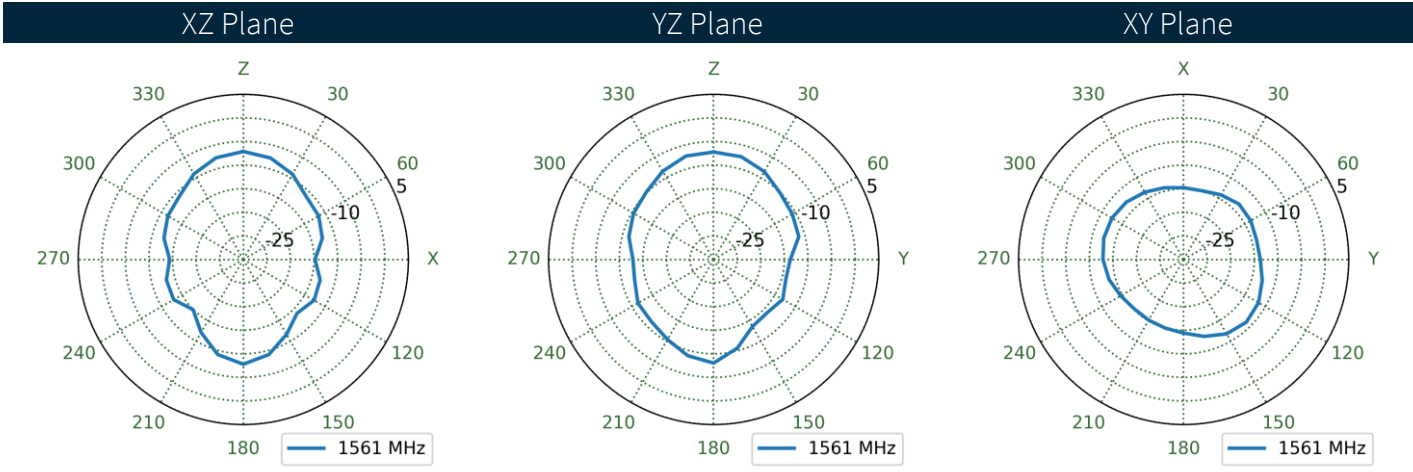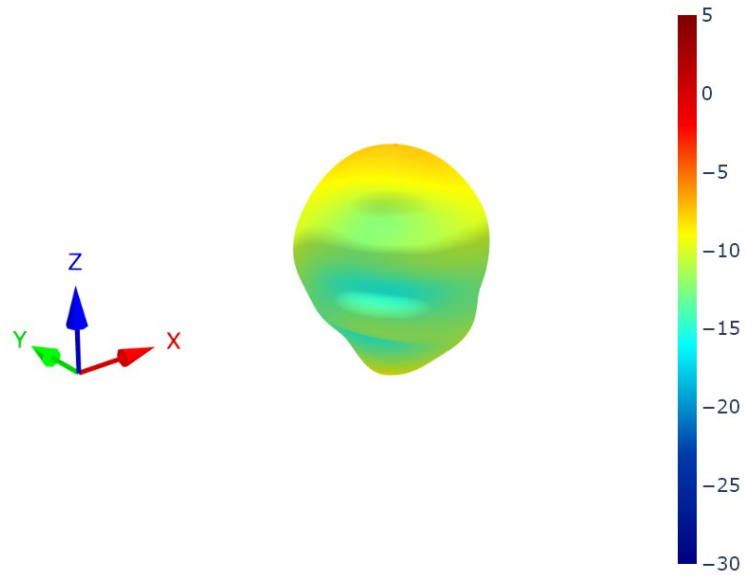

7.3 Patterns at 1575 MHz

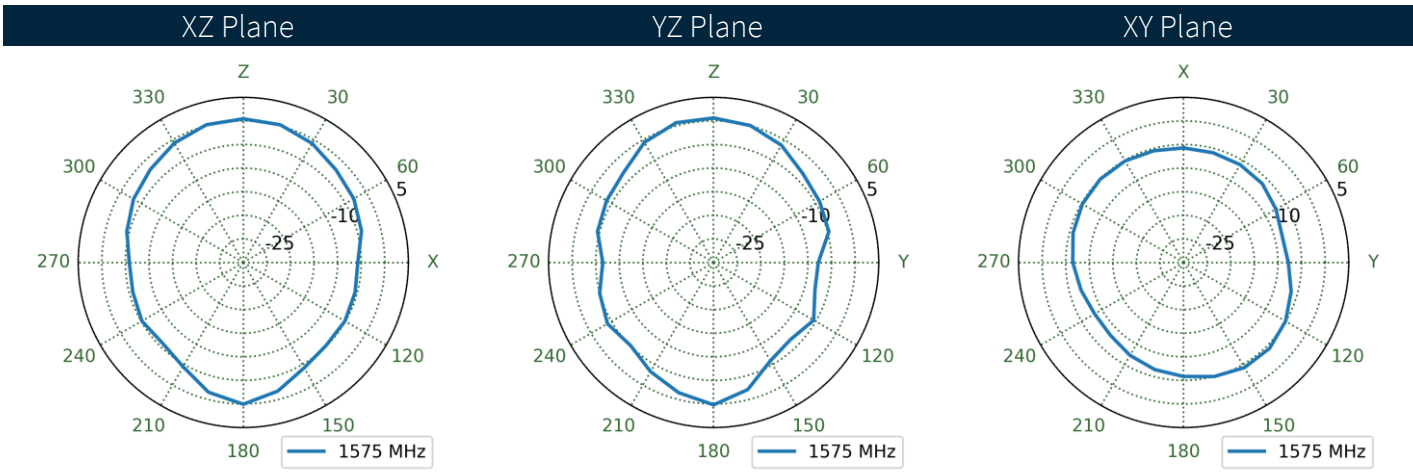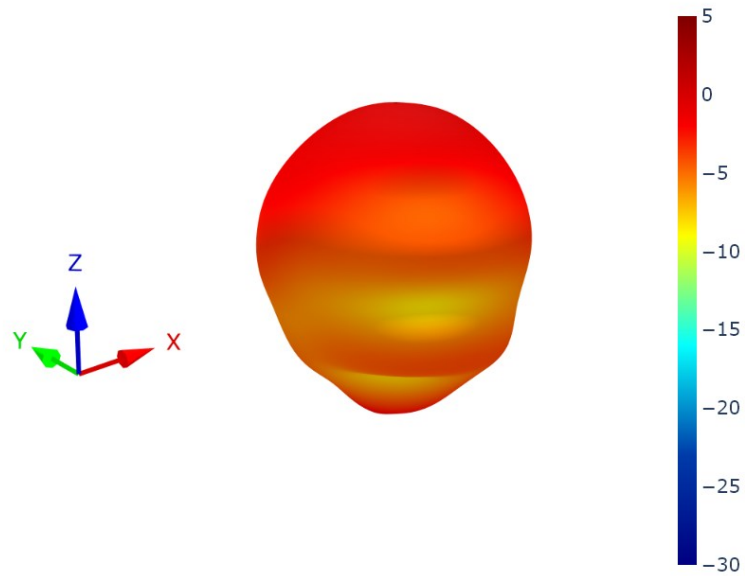


7.4 Patterns at 1602 MHz

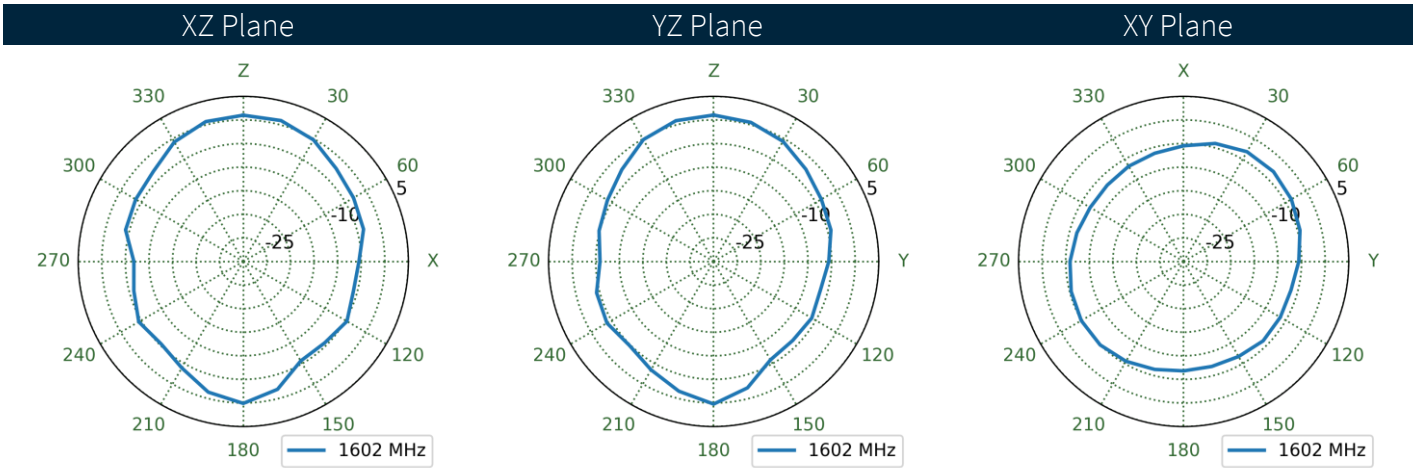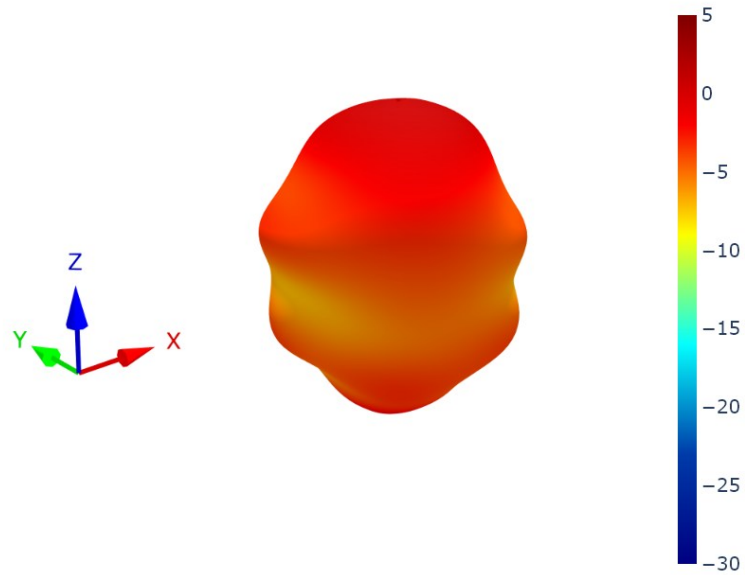

8. Solder Reflow Profile

The SGGP124B can be assembled by following the recommended soldering temperatures are as follows:

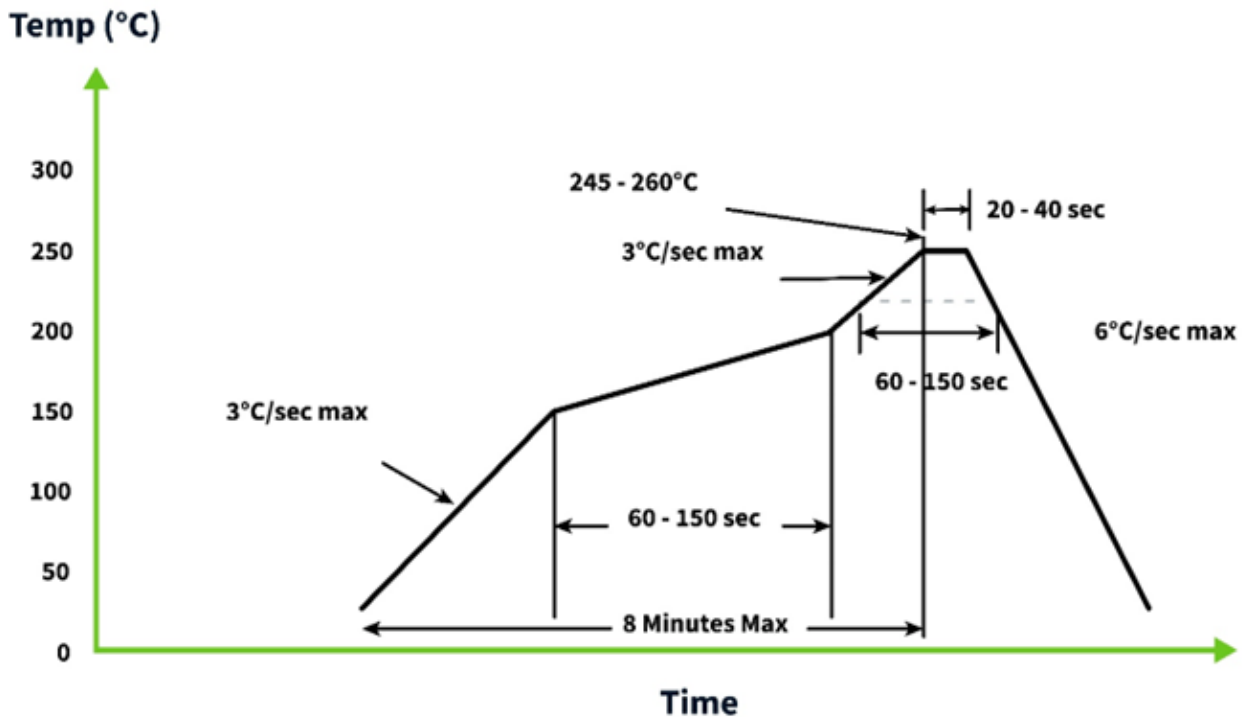

*Temperatures listed within a tolerance of +/- 10° C

Smaller components are typically mounted on the first pass, however, we do advise mounting the SGGP124B when placing larger components on the board during subsequent reflows.

Note: Soldering flux classified ROL0 under IPC J-STD-004 is recommended.

Changelog for the datasheet

SPE-25-8-111 – SGGP124B

Revision: A (Original First Release)

Date: 2025-04-04

Notes: Initial Release

Author: Gary West



www.taoglas.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Taoglas](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#)
[0600-00060](#) [PAL90209H-FNF](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#)
[ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#)
[29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#)
[BWGNXCX16-6B1Y2L120](#) [BWGNXCX15-15B1Y4L120](#) [DL-T023-4GW](#) [J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-](#)
[GPS181804-WY](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [TX5800-JZ-5](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#)