

National Semiconductor is now part of
Texas Instruments.

Search <http://www.ti.com/> for the latest technical
information and details on our current products and services.

LMP8640/LMP8640HV

Precision High Voltage Current Sense Amplifier

General Description

The LMP8640 and the LMP8640HV are precision current sense amplifiers that detect small differential voltages across a sense resistor in the presence of high input common mode voltages with a supply voltage range from 2.7V to 12V.

The LMP8640 accepts input signals with common mode voltage range from -2V to 42V, while the LMP8640HV accepts input signal with common mode voltage range from -2V to 76V. The LMP8640 and LMP8640HV have fixed gain for applications that demand accuracy over temperature. The LMP8640 and LMP8640HV come out with three different fixed gains 20V/V, 50V/V, 100V/V ensuring a gain accuracy as low as 0.25%. The output is buffered in order to provide low output impedance. This high side current sense amplifier is ideal for sensing and monitoring currents in DC or battery powered systems, excellent AC and DC specifications over temperature, and keeps errors in the current sense loop to a minimum. The LMP8640 and LMP8640HV are ideal choice for industrial, automotive and consumer applications, and it is available in TSOT-6 package.

Features


Typical values, $T_A = 25^\circ\text{C}$

- High common-mode voltage range
 - LMP8640 -2V to 42V
 - LMP8640HV -2V to 76V
- Supply voltage range 2.7V to 12V
- Gain options 20V/V; 50V/V; 100V/V
- Max gain error 0.25%
- Low offset voltage 900 μV
- Input bias current 13 μA
- PSRR 85 dB
- CMRR (2.1V to 42V) 103 dB
- Temperature range -40°C to 125°C
- 6-Pin TSOT Package

Applications

- High-side current sense
- Vehicle current measurement
- Motor controls
- Battery monitoring
- Remote sensing
- Power management

Typical Application

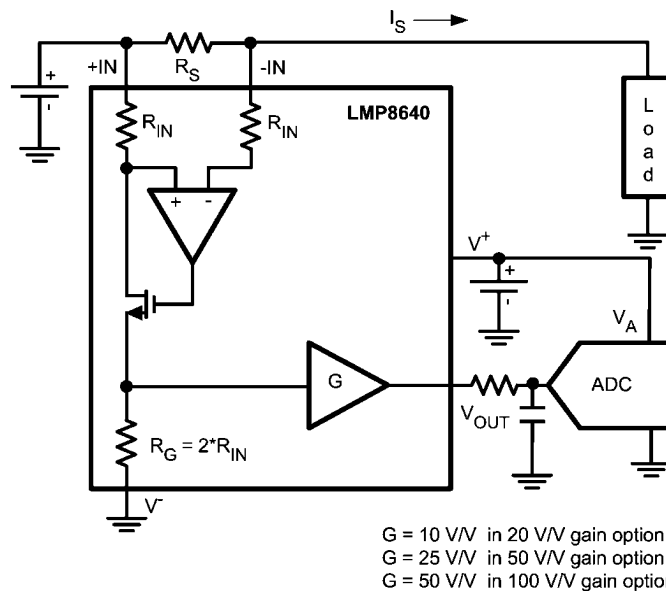

30071462

Absolute Maximum Ratings *(Note 1)*

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

ESD Tolerance *(Note 2)*

Human Body Model

For input pins +IN, -IN

5000V

For all other pins

2000V

Machine Model

200V

Charge device model

1250V

Supply Voltage ($V_S = V^+ - V^-$)

13.2V

Differential Voltage +IN- (-IN)

6V

Voltage at pins +IN, -IN

LMP8640HV

-6V to 80V

LMP8640

-6V to 60V

Voltage at V_{OUT} pin

V^- to V^+

Storage Temperature Range

-65°C to 150°C

Junction Temperature *(Note 3)*

150°C

For soldering specifications,

see product folder at www.national.com and

www.national.com/ms/MS/MS-SOLDERING.pdf

Operating Ratings *(Note 1)*

Supply Voltage ($V_S = V^+ - V^-$)

2.7V to 12V

Temperature Range *(Note 3)*

-40°C to 125°C

Package Thermal Resistance *(Note 3)*

TSOT-6

96°C/W

2.7V Electrical Characteristics *(Note 4)*

Unless otherwise specified, all limits guaranteed for at $T_A = 25^\circ\text{C}$, $V_S = V^+ - V^-$, $V_{SENSE} = +IN - (-IN)$, $V^+ = 2.7\text{V}$, $V^- = 0\text{V}$, $-2\text{V} < V_{CM} < 76\text{V}$, $R_L = 10\text{M}\Omega$. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Condition	Min <i>(Note 6)</i>	Typ <i>(Note 5)</i>	Max <i>(Note 6)</i>	Units
V_{OS}	Input Offset Voltage	$V_{CM} = 2.1\text{V}$	-900 -1160		900 1160	μV
TCV_{OS}	Input Offset Voltage Drift <i>(Note 7, Note 9)</i>	$V_{CM} = 2.1\text{V}$			2.6	$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current <i>(Note 10)</i>	$V_{CM} = 2.1\text{V}$		12	20 27	μA
e_{ni}	Input Voltage Noise <i>(Note 9)</i>	$f > 10\text{ kHz}$		117		$\text{nV}/\sqrt{\text{Hz}}$
Gain A_V	Fixed Gain LMP8640-T LMP8640HV-T			20		V/V
	Fixed Gain LMP8640-F LMP8640HV-F			50		V/V
	Fixed Gain LMP8640-H LMP8640HV-H			100		V/V
	Gain error	$V_{CM} = 2.1\text{V}$	-0.25 -0.51		0.25 0.51	%
	Accuracy over temperature <i>(Note 9)</i>	-40°C to 125°C , $V_{CM} = 2.1\text{V}$			26.2	$\text{ppm}/^\circ\text{C}$
PSRR	Power Supply Rejection Ratio	$V_{CM} = 2.1\text{V}$, $2.7\text{V} < V^+ < 12\text{V}$,	85			dB
CMRR	Common Mode Rejection Ratio	LMP8640HV $2.1\text{V} < V_{CM} < 42\text{V}$	103			dB
		LMP8640 $2.1\text{V} < V_{CM} < 42\text{V}$				
		LMP8640HV $2.1\text{V} < V_{CM} < 76\text{V}$	95			
		$-2\text{V} < V_{CM} < 2\text{V}$,	60			
BW	Fixed Gain LMP8640-T LMP8640HV-T <i>(Note 9)</i>	DC $V_{SENSE} = 67.5\text{ mV}$, $C_L = 30\text{ pF}$, $R_L = 1\text{M}\Omega$		950		kHz
	Fixed Gain LMP8640-F LMP8640HV-F <i>(Note 9)</i>	DC $V_{SENSE} = 27\text{ mV}$, $C_L = 30\text{ pF}$, $R_L = 1\text{M}\Omega$		450		
	Fixed Gain LMP8640-H LMP8640HV-H <i>(Note 9)</i>	DC $V_{SENSE} = 13.5\text{ mV}$, $C_L = 30\text{ pF}$, $R_L = 1\text{M}\Omega$		230		
SR	Slew Rate <i>(Note 8, Note 9)</i>	$V_{CM} = 5\text{V}$, $C_L = 30\text{ pF}$, $R_L = 1\text{M}\Omega$, LMP8640-T LMP8640HV-T $V_{SENSE} = 100\text{mVpp}$, LMP8640-F LMP8640HV-F $V_{SENSE} = 40\text{mVpp}$, LMP8640-H LMP8640HV-H $V_{SENSE} = 20\text{mVpp}$,		1.4		V/ μs

Symbol	Parameter	Condition	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
R_{IN}	Differential Mode Input Impedance (Note 9)			5		$k\Omega$
I_S	Supply Current	$V_{CM} = 2.1V$		420	600 800	μA
		$V_{CM} = -2V$		2000	2500 2750	
V_{OUT}	Maximum Output Voltage	$V_{CM} = 2.1V$	2.65			V
	Minimum Output Voltage	LMP8640-T LMP8640HV-T $V_{CM} = 2.1V$			18.2	mV
		LMP8640-F LMP8640HV-F $V_{CM} = 2.1V$			40	
		LMP8640-H LMP8640HV-H $V_{CM} = 2.1V$			80	
C_{LOAD}	Max Output Capacitance Load (Note 9)			30		pF

5V Electrical Characteristics (Note 4)

Unless otherwise specified, all limits guaranteed for at $T_A = 25^\circ C$, $V_S = V^+ - V^-$, $V_{SENSE} = +IN - (-IN)$, $V^+ = 5V$, $V^- = 0V$, $-2V < V_{CM} < 76V$, $R_L = 10M\Omega$. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Condition	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
V_{OS}	Input Offset Voltage	$V_{CM} = 2.1V$	-900 -1160		900 1160	μV
TCV_{OS}	Input Offset Voltage Drift (Note 7, Note 9)	$V_{CM} = 2.1V$			2.6	$\mu V/^\circ C$
I_B	Input Bias Current (Note 10)	$V_{CM} = 2.1V$		13	21 28	μA
e_{ni}	Input Voltage Noise (Note 9)	$f > 10 kHz$		117		$nV/\sqrt{Hz}$
Gain A_v	Fixed Gain LMP8640-T LMP8640HV-T			20		V/V
	Fixed Gain LMP8640-F LMP8640HV-F			50		V/V
	Fixed Gain LMP8640-H LMP8640HV-H			100		V/V
	Gain error	$V_{CM} = 2.1V$	-0.25 -0.51		0.25 0.51	%
	Accuracy over temperature (Note 9)	$-40^\circ C$ to $125^\circ C$, $V_{CM} = 2.1V$			26.2	ppm/ $^\circ C$
PSRR	Power Supply Rejection Ratio	$V_{CM} = 2.1V$, $2.7V < V^+ < 12V$,	85			dB
CMRR	Common Mode Rejection Ratio	LMP8640HV $2.1V < V_{CM} < 42V$	103			dB
		LMP8640 $2.1V < V_{CM} < 42V$				
		LMP8640HV $2.1V < V_{CM} < 76V$	95			
		$-2V < V_{CM} < 2V$,	60			
BW	Fixed Gain LMP8640-T LMP8640HV-T (Note 9)	DC $V_{SENSE} = 67.5 mV$, $C_L = 30 pF$, $R_L = 1M\Omega$		950		kHz
	Fixed Gain LMP8640-F LMP8640HV-F (Note 9)	DC $V_{SENSE} = 27 mV$, $C_L = 30 pF$, $R_L = 1M\Omega$		450		
	Fixed Gain LMP8640-H LMP8640HV-H (Note 9)	DC $V_{SENSE} = 13.5 mV$, $C_L = 30 pF$, $R_L = 1M\Omega$		230		

Symbol	Parameter	Condition	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
SR	Slew Rate (Note 8, Note 9)	$V_{CM} = 5V$, $C_L = 30\text{ pF}$, $R_L = 1M\Omega$, LMP8640-T LMP8640HV-T $V_{SENSE} = 200mV_{pp}$, LMP8640-F LMP8640HV-F $V_{SENSE} = 80mV_{pp}$, LMP8640-H LMP8640HV-H $V_{SENSE} = 40mV_{pp}$,		1.6		V/ μ s
R_{IN}	Differential Mode Input Impedance (Note 9)			5		k Ω
I_S	Supply Current	$V_{CM} = 2.1V$		500	722 922	μ A
		$V_{CM} = -2V$		2050	2500 2750	
V_{OUT}	Maximum Output Voltage	$V_{CM} = 2.1V$	4.95			V
	Minimum Output Voltage	LMP8640-T LMP8640HV-T $V_{CM} = 2.1V$			18.2	mV
		LMP8640-F LMP8640HV-F $V_{CM} = 2.1V$			40	
		LMP8640-H LMP8640HV-H $V_{CM} = 2.1V$			80	
C_{LOAD}	Max Output Capacitance Load (Note 9)			30		pF

12V Electrical Characteristics (Note 4)

Unless otherwise specified, all limits guaranteed for at $T_A = 25^\circ\text{C}$, $V_S = V^+ - V^-$, $V_{SENSE} = +IN - (-IN)$, $V^+ = 12V$, $V^- = 0V$, $-2V < V_{CM} < 76V$, $R_L = 10M\Omega$. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Condition	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
V_{OS}	Input Offset Voltage	$V_{CM} = 2.1V$	-900 -1160		900 1160	μ V
TCV_{OS}	Input Offset Voltage Drift (Note 7, Note 9)	$V_{CM} = 2.1V$			2.6	μ V/ $^\circ\text{C}$
I_B	Input Bias Current (Note 10)	$V_{CM} = 2.1V$		13	22 28	μ A
e_{ni}	Input Voltage Noise (Note 9)	$f > 10\text{ kHz}$		117		nV/ $\sqrt{\text{Hz}}$
Gain A_V	Fixed Gain LMP8640-T LMP8640HV-T			20		V/V
	Fixed Gain LMP8640-F LMP8640HV-F			50		V/V
	Fixed Gain LMP8640-H LMP8640HV-H			100		V/V
	Gain error	$V_{CM} = 2.1V$	-0.25 -0.51		0.25 0.51	%
	Accuracy over temperature (Note 9)	-40°C to 125°C , $V_{CM} = 2.1V$			26.2	ppm/ $^\circ\text{C}$
PSRR	Power Supply Rejection Ratio	$V_{CM} = 2.1V$, $2.7V < V^+ < 12V$,	85			dB
CMRR	Common Mode Rejection Ratio	LMP8640HV $2.1V < V_{CM} < 42V$ LMP8640 $2.1V < V_{CM} < 42V$	103			dB
		LMP8640HV $2.1V < V_{CM} < 76V$	95			
		$-2V < V_{CM} < 2V$,	60			

Symbol	Parameter	Condition	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
BW	Fixed Gain LMP8640-T LMP8640HV-T (Note 9)	DC $V_{SENSE} = 67.5 \text{ mV}$, $C_L = 30 \text{ pF}$, $R_L = 1 \text{ M}\Omega$		950		kHz
	Fixed Gain LMP8640-F LMP8640HV-F (Note 9)	DC $V_{SENSE} = 27 \text{ mV}$, $C_L = 30 \text{ pF}$, $R_L = 1 \text{ M}\Omega$		450		
	Fixed Gain LMP8640-H LMP8640HV-H (Note 9)	DC $V_{SENSE} = 13.5 \text{ mV}$, $C_L = 30 \text{ pF}$, $R_L = 1 \text{ M}\Omega$		230		
SR	Slew Rate (Note 8, Note 9)	$V_{CM} = 5 \text{ V}$, $C_L = 30 \text{ pF}$, $R_L = 1 \text{ M}\Omega$, LMP8640-T LMP8640HV-T $V_{SENSE} = 500 \text{ mVpp}$, LMP8640-F LMP8640HV-F $V_{SENSE} = 200 \text{ mVpp}$, LMP8640-H LMP8640HV-H $V_{SENSE} = 100 \text{ mVpp}$,		1.8		V/ μs
R_{IN}	Differential Mode Input Impedance (Note 9)			5		k Ω
I_S	Supply Current	$V_{CM} = 2.1 \text{ V}$		720	1050 1250	μA
		$V_{CM} = -2 \text{ V}$		2300	2800 3000	
V_{OUT}	Maximum Output Voltage	$V_{CM} = 2.1 \text{ V}$	11.85			V
	Minimum Output Voltage	LMP8640-T LMP8640HV-T $V_{CM} = 2.1 \text{ V}$			18.2	mV
		LMP8640-F LMP8640HV-F $V_{CM} = 2.1 \text{ V}$			40	
		LMP8640-H LMP8640HV-H $V_{CM} = 2.1 \text{ V}$			80	
C_{LOAD}	Max Output Capacitance Load (Note 9)			30		pF

Note 1: "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the Absolute Maximum Ratings or other conditions beyond those indicated in the Operating Ratings is not implied. Operating Ratings indicate conditions at which the device is functional and the device should not be operated beyond such conditions.

Note 2: Human Body Model, applicable std. MIL-STD-883, Method 3015.7. Machine Model, applicable std. JESD22-A115-A (ESD MM std. of JEDEC) Field-Induced Charge-Device Model, applicable std. JESD22-C101-C (ESD FICDM std. of JEDEC).

Note 3: The maximum power dissipation must be derated at elevated temperatures and is dictated by $T_{J(MAX)}$, θ_{JA} , and the ambient temperature, T_A . The maximum allowable power dissipation $P_{DMAX} = (T_{J(MAX)} - T_A) / \theta_{JA}$ or the number given in Absolute Maximum Ratings, whichever is lower.

Note 4: Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that $T_J = T_A$. No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where $T_J > T_A$. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

Note 5: Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.

Note 6: Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using statistical quality control (SQC) method.


Note 7: Offset voltage temperature drift is determined by dividing the change in V_{OS} at the temperature extremes by the total temperature change.

Note 8: The number specified is the average of rising and falling slew rates and measured at 90% to 10%.


Note 9: This parameter is guaranteed by design and/or characterization and is not tested in production.

Note 10: Positive Bias Current corresponds to current flowing into the device.

Block Diagram

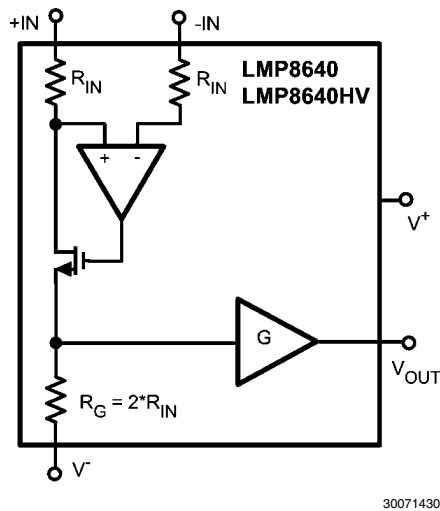

Connection Diagram

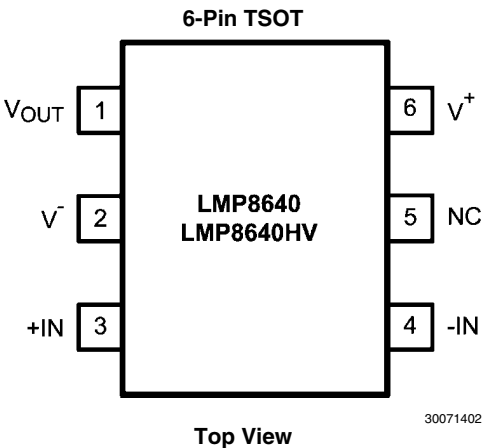

Pin Descriptions

Pin	Name	Description
1	V_{OUT}	Single Ended Output
2	V^-	Negative Supply Voltage
3	$+IN$	Positive Input
4	$-IN$	Negative Input
5	NC	Not Connected
6	V^+	Positive Supply Voltage


Ordering Information

Package	Gain	Part Number	Package Marking	Transport Media	NSC Drawing
6-Pin TSOT	20V/V	LMP8640MK-T	AA6A	1k Units Tape and Reel	MK06A
		LMP8640MKE-T		250 Units Tape and Reel	
		LMP8640MKX-T		3k Units Tape and Reel	
		LMP8640HVMK-T	AB6A	1k Units Tape and Reel	
		LMP8640HVMKE-T		250 Units Tape and Reel	
		LMP8640HVMKX-T		3k Units Tape and Reel	
6-Pin TSOT	50V/V	LMP8640MK-F	AC6A	1k Units Tape and Reel	MK06A
		LMP8640MKE-F		250 Units Tape and Reel	
		LMP8640MKX-F		3k Units Tape and Reel	
		LMP8640HVMK-F	AD6A	1k Units Tape and Reel	
		LMP8640HVMKE-F		250 Units Tape and Reel	
		LMP8640HVMKX-F		3k Units Tape and Reel	
6-Pin TSOT	100V/V	LMP8640MK-H	AE6A	1k Units Tape and Reel	MK06A
		LMP8640MKE-H		250 Units Tape and Reel	
		LMP8640MKX-H		3k Units Tape and Reel	
		LMP8640HVMK-H	AF6A	1k Units Tape and Reel	
		LMP8640HVMKE-H		250 Units Tape and Reel	
		LMP8640HVMKX-H		3k Units Tape and Reel	


Typical Performance Characteristics

(-IN), $R_L = 10\text{ M}\Omega$.


Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_S = V^+ - V^-$, $V_{\text{SENSE}} = +\text{IN} -$

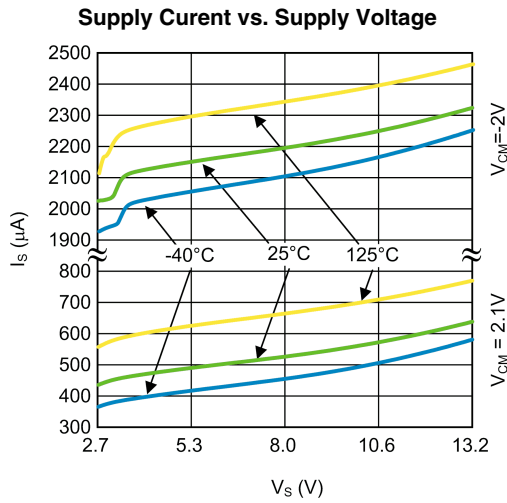


30071425

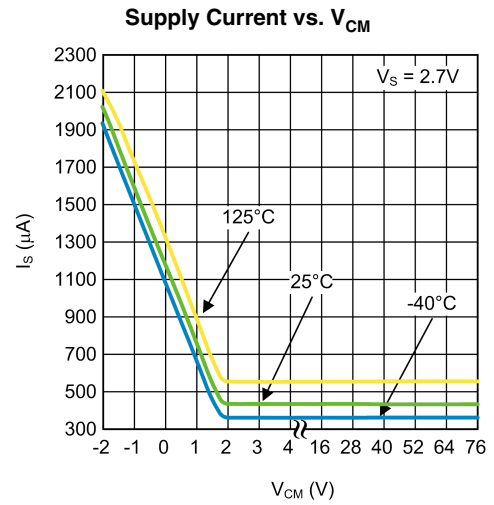


30071426

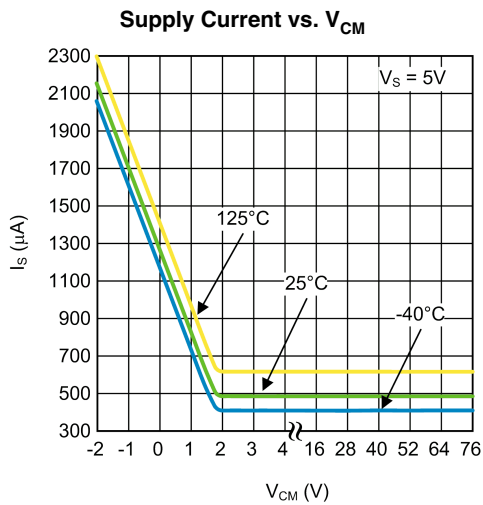


30071427

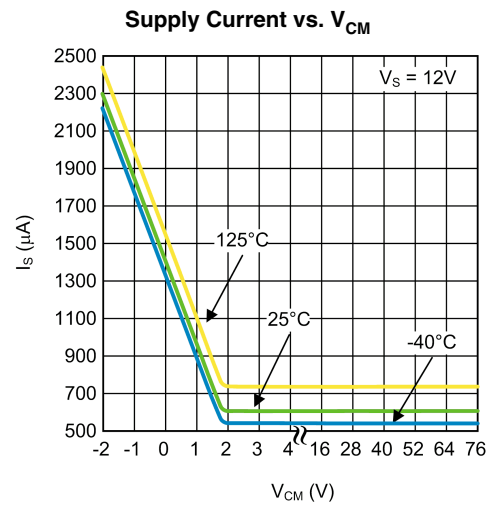


30071428

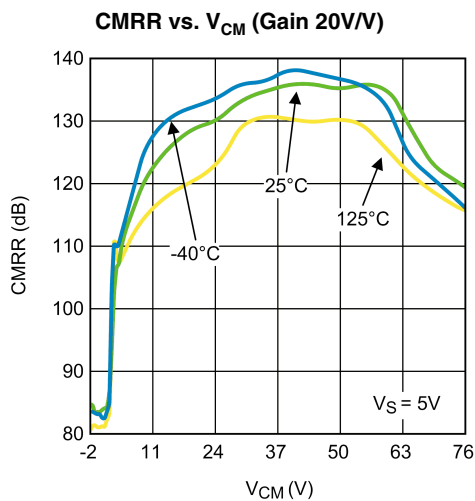


30071422

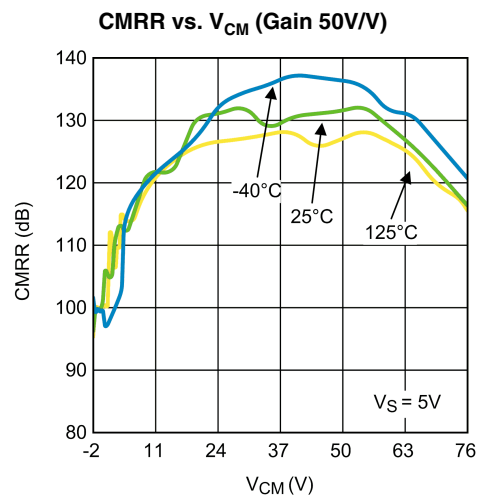


30071423

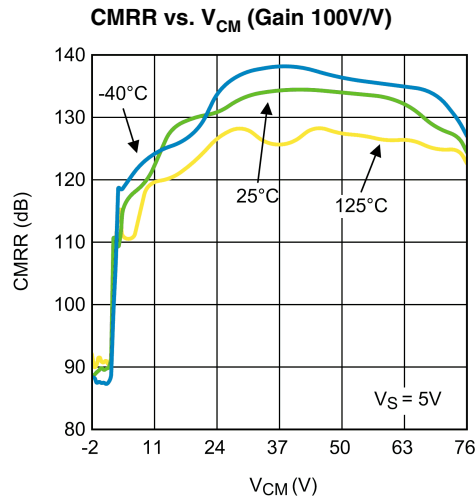


30071424

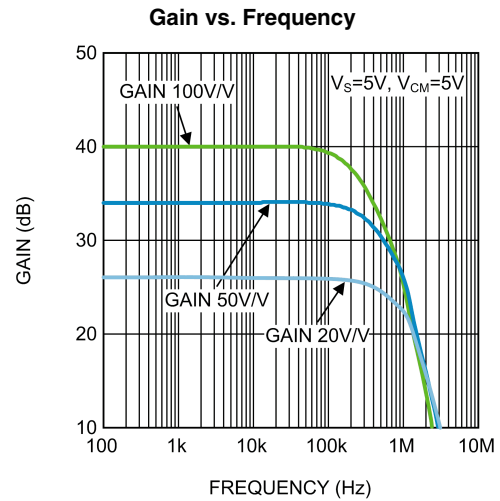


30071414

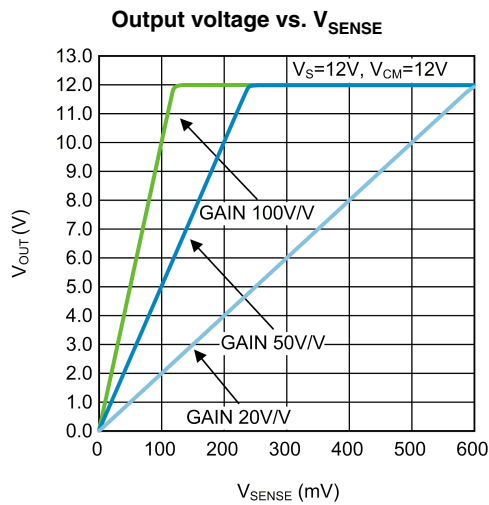


30071416

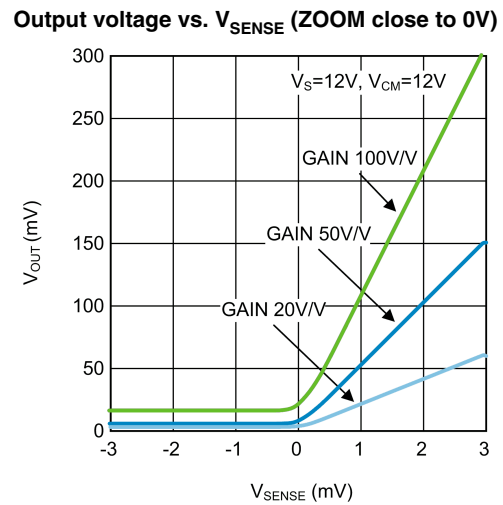


30071417

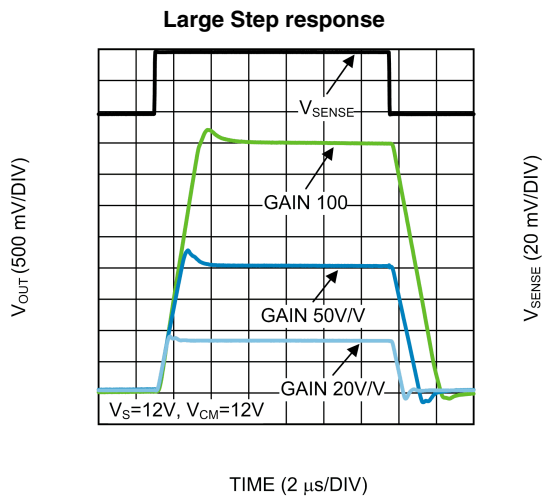


30071418

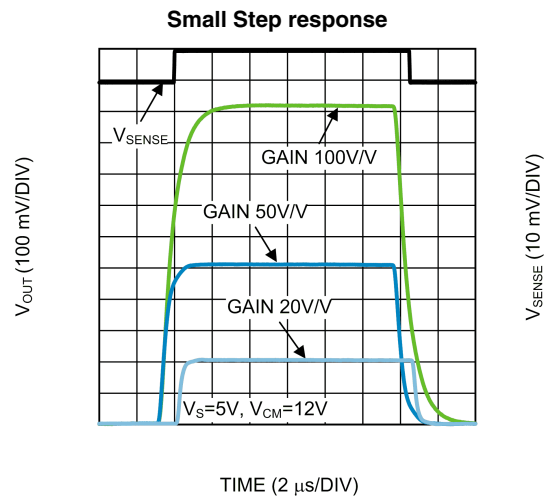


30071419

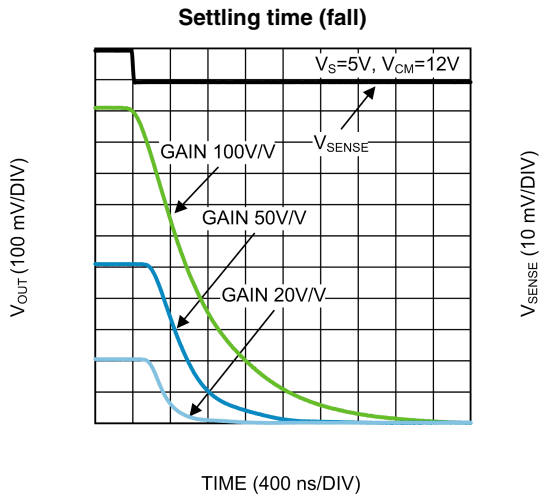


30071420

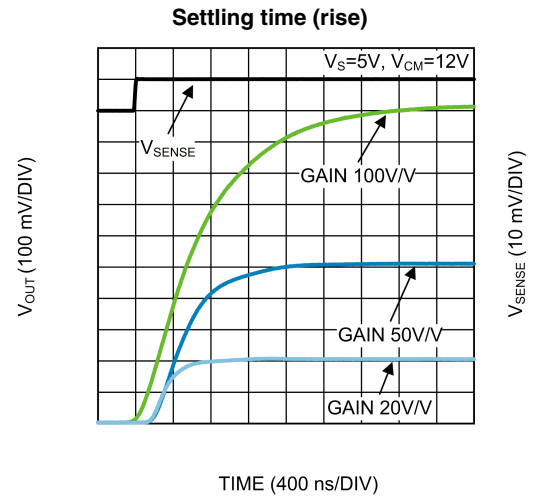


30071421

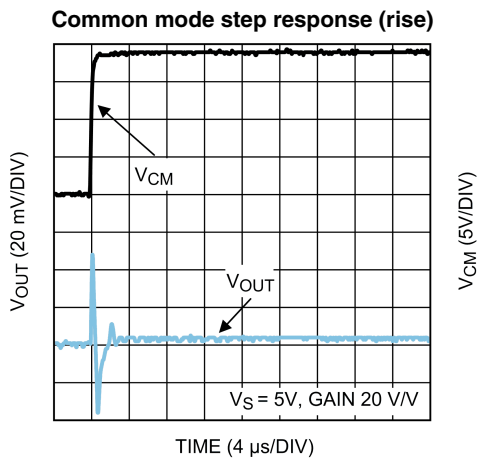


30071411

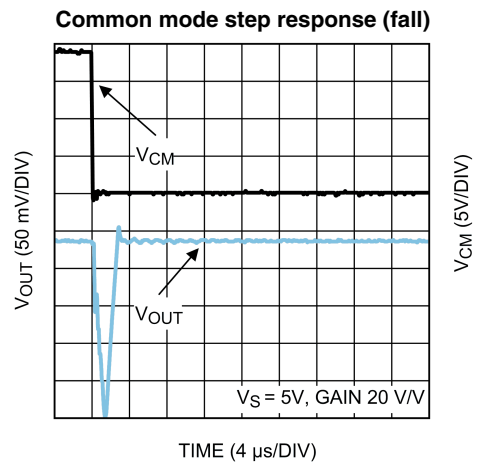


30071410

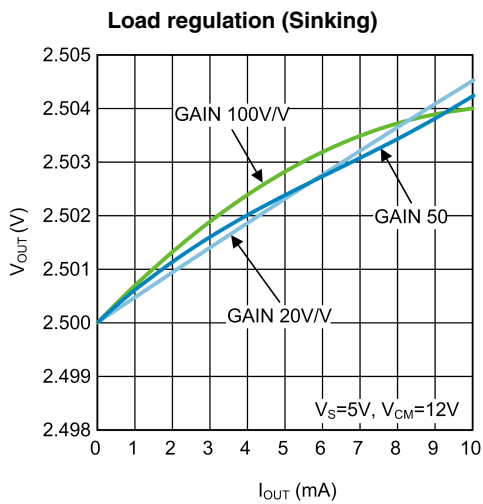


30071432

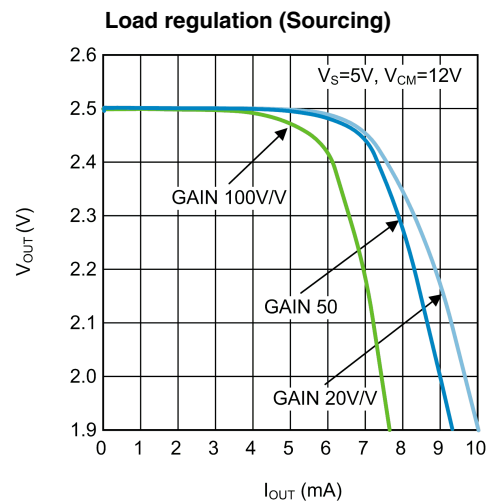

30071431

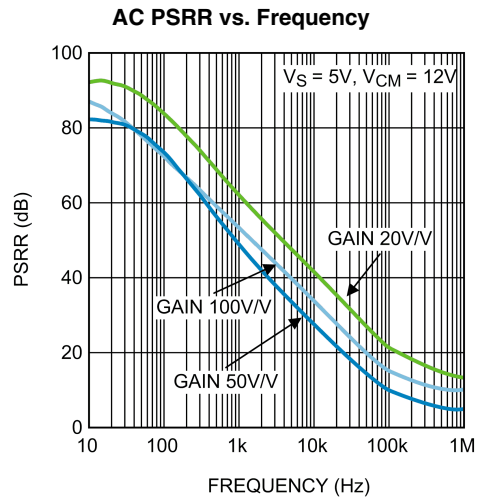

30071412

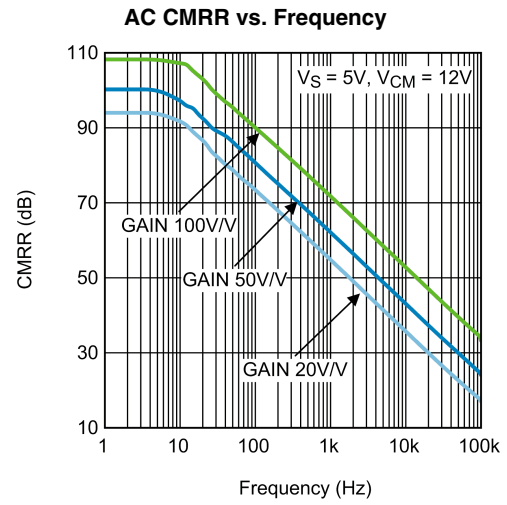

30071413

Application Information

GENERAL

The LMP8640 and LMP8640HV are single supply high side current sense amplifiers with a fixed gain of 20V/V, 50V/V, 100V/V and a common mode voltage range of -2V to 42V or -2V to 76V depending on the grade.

THEORY OF OPERATION

As seen from the picture below, the current flowing through R_S develops a voltage drop equal to V_{SENSE} across R_S . The high impedance inputs of the amplifier doesn't conduct this current and the high open loop gain of the sense amplifier forces its non-inverting input to the same voltage as the inverting input. In this way the voltage drop across R_{IN} matches V_{SENSE} . A current proportional to I_S according to the following relation:

$$I_G = V_{SENSE}/R_{IN} = R_S * I_S / R_{IN}$$

flows entirely in the internal gain resistor R_G developing a voltage drop equal to

$$V_{RG} = I_G * R_G = (V_{SENSE}/R_{IN}) * R_G = ((R_S * I_S)/R_{IN}) * R_G$$

This voltage is buffered and showed at the output with a very low impedance allowing a very easy interface of the LMP8640 with other ICs (ADC, $\mu C...$).

$$V_{OUT} = 2 * (R_S * I_S) * G,$$

where $G = R_G/R_{IN} = 10V/V, 25V/V, 50V/V$, according to the gain options.

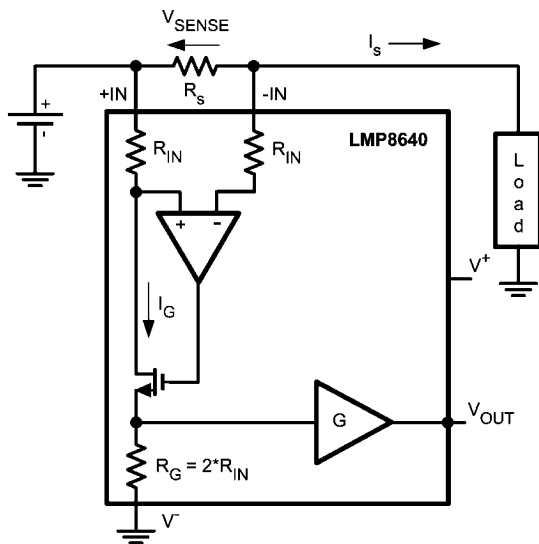


FIGURE 1. Current monitor


SELECTION OF THE SHUNT RESISTOR

The value chosen for the shunt resistor, R_S , depends on the application. It plays a big role in a current sensing system and must be chosen with care. The selection of the shunt resistor needs to take in account the small-signal accuracy, the power dissipated and the voltage loss across the shunt itself. In applications where a small current is sensed, a bigger value of R_S is selected to minimize the error in the proportional output voltage. Higher resistor value improves the SNR at the input of the current sense amplifier and hence gives an accurate output. Similarly when high current is sensed, the power losses in R_S can be significant so a smaller value of R_S is sug-

gested. In this condition is required to take in account also the power rating of R_S resistor. The low input offset of the LMP8640 allows the use of small sense resistors to reduce power dissipation still providing a good input dynamic range. The input dynamic range is the ratio expressed in dB between the maximum signal that can be measured and the minimum signal that can be detected, usually the input offset is the principal limiting factor.

DRIVING ADC

The input stage of an Analog to Digital converter can be modelled with a resistor and a capacitance versus ground. So if the voltage source doesn't have a low impedance an error in the amplitude's measurement will occur. In this case a buffer is needed to drive the ADC. The LMP8640 has an internal output buffer able to drive a capacitance load up to 30 pF or the input stage of an ADC. If required an external low pass RC filter can be added at the output of the LMP8640 to reduce the noise and the bandwidth of the current sense.

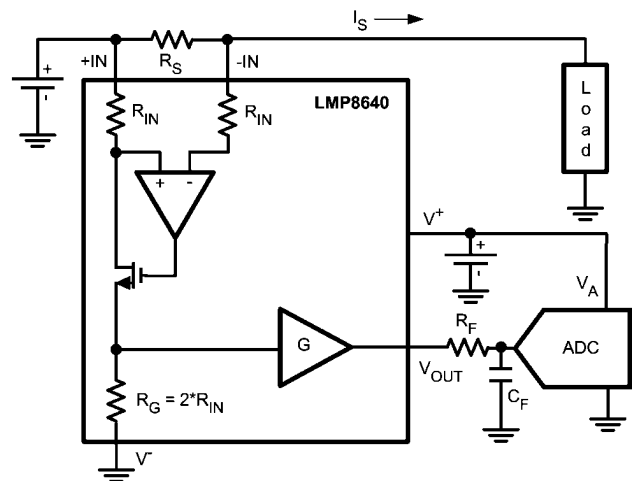

30071461

FIGURE 2. LMP8640 to ADC interface

DESIGN EXAMPLE

For example in a current monitor application is required to measure the current sunk by a load (peak current 10A) with a resolution of 10mA and 0.5% of accuracy. The 10bit analog to digital converter accepts a max input voltage of 4.1V. Moreover in order to not burn much power on the shunt resistor it needs to be less than 10m Ω . In the table below are summarized the other working condition.

Working Condition	Value	
	Min	Max
Supply Voltage	5V	5.5V
Common mode Voltage	48V	70V
Temperature	0°C	70°C
Signal BW		50kHz

First step – LMP8640 / LMP8640HV selection

The required common mode voltage of the application implies that the right choice is the LMP8640HV (High common mode voltage up to 76V).

Second step – Gain option selection

We can choose between three gain option (20V/V, 50V/V, 100V/V). considering the max input voltage of the ADC

(4.1V) , the max Sense voltage across the shunt resistor is evaluated according the following formula:

$$V_{\text{SENSE}} = (\text{MAX Vin ADC}) / \text{Gain};$$

hence the max V_{SENSE} will be 205mV, 82mV, 41mV respectively. The shunt resistor are then evaluated considering the maximum monitored current :

$$R_S = (\text{max } V_{\text{SENSE}}) / I_{\text{MAX}}$$

For each gain option the max shunt resistors are the following : 20.5m Ω , 8.2m Ω , 4.1m Ω respectively.

One of the project constraints requires $R_S < 10\text{m}\Omega$, it means that the 20.5m Ω will be discarded and hence the 50V/V and 100V/V gain options are still in play.

Third step – Shunt resistor selection

At this point an error budget calculation, considering the calibration of the Gain, Offset, CMRR, and PSRR, helps in the selection of the shunt resistor. In the table below the contribution of each error source is calculated considering the values of the EC Table at 5V supply.




Resolution Calculation

ERROR SOURCE	Rs=4.1m Ω	Rs=8.1m Ω
CMRR calibrated ad mid VCM range	77.9 μ V	77.9 μ V
PSRR calibrated at 5V	8.9 μ V	8.9 μ V
Total error (squared sum of contribution)	78 μ V	78 μ V
Resolution (Total error / R_S)	19.2mA	9.6mA


Accuracy Calculation

ERROR SOURCE	Rs=4.1m Ω	Rs=8.1m Ω
Tc Vos	182 μ V	182 μ V
Nosie	216 μ V	216 μ V
Gain drift	75.2 μ V	151 μ V
Total error (squared sum of contribution)	293 μ V	320 μ V
Accuracy 100*(Max_ V_{SENSE} / Total Error)	0.7%	0.4%

From the tables above is clear that the 8.2m Ω shunt resistor allows the respect of the project's constraints. The power burned on the Shunt is 820mW at 10A.

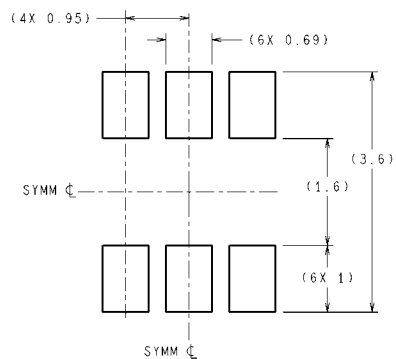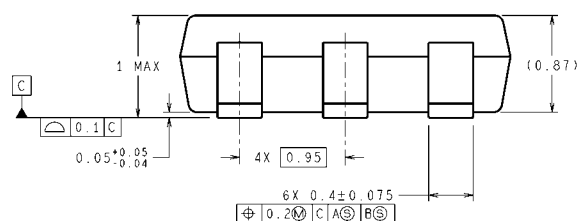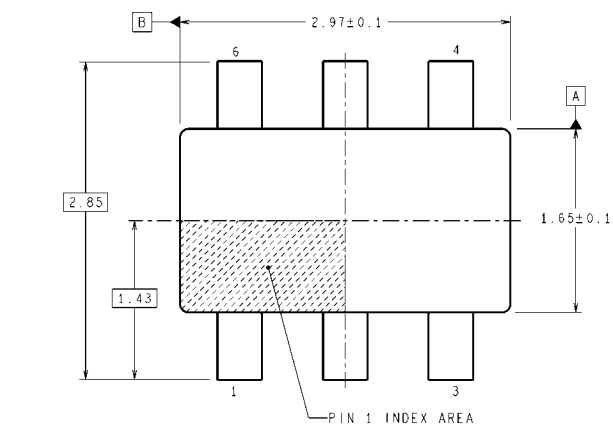Physical Dimensions inches (millimeters) unless otherwise noted

RECOMMENDED LAND PATTERN

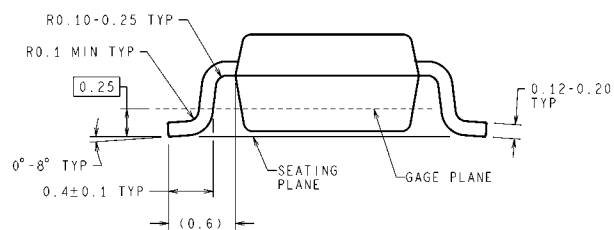

DIMENSIONS ARE IN MILLIMETERS

MK06A (Rev E)

TSOT-6
NS Package Number MK06A

Notes

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage References	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Applications & Markets	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	SolarMagic™	www.national.com/solarmagic
PLL/VCO	www.national.com/wireless	PowerWise® Design University	www.national.com/training

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com



Search For..



Enter order part number : LMP8640

Go!

Part Number(s) (NSID)	Top View	Availability	Current Reported Stock				Budgetary Pricing	Pack Size
LMP8640HVMK-F/NOPB RoHS Status	 TSOT	Full production Lead Time: 17 weeks	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 1000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640HVMK-H/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 1000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640HVMK-T/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 1000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640HVMKE-F/NOPB RoHS Status	 TSOT	Full production Lead Time: 17 weeks Samples	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 250
			DIGIKEY	Buy Now ▶	Worldwide	0		
			FUTURE	Buy Now ▶	Worldwide	250		
LMP8640HVMKE-H/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks Samples	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 250
			DIGIKEY	Buy Now ▶	Worldwide	0		
			FARNELL	Buy Now ▶	Europe and Asia	500		
			FUTURE	Buy Now ▶	Worldwide	500		
			NEWARK	Buy Now ▶	Americas	500		
LMP8640HVMKE-T/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks Samples	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 250
			ARROW	Buy Now ▶	Worldwide	1000		
			DIGIKEY	Buy Now ▶	Worldwide	0		
			FARNELL	Buy Now ▶	Europe and Asia	500		
			FUTURE	Buy Now ▶	Worldwide	500		
			NEWARK	Buy Now ▶	Americas	500		
LMP8640HVMKX-F/NOPB RoHS Status	 TSOT	Full production Lead Time: 17 weeks	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 3000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640HVMKX-H/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 3000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640HVMKX-T/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	Distributor		Region	Qty	\$0.99 each at 1K+ pcs	 reel of 3000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640MK-F/NOPB RoHS Status	 TSOT	Full production Lead Time: 17 weeks	Distributor		Region	Qty	\$0.89 each at 1K+ pcs	 reel of 1000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640MK-H/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	Distributor		Region	Qty	\$0.89 each at 1K+ pcs	 reel of 1000
			DIGIKEY	Buy Now ▶	Worldwide	0		
LMP8640MK-T/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	Distributor		Region	Qty	\$0.89 each at 1K+ pcs	 reel of 1000
			DIGIKEY	Buy Now ▶	Worldwide	0		
			Distributor		Region	Qty		

LMP8640MKE-F/NOPB RoHS Status	 TSOT	Full production Lead Time: 17 weeks Samples	<table><tr><td>DIGIKEY</td><td>Buy Now ▶</td><td>Worldwide</td><td>0</td></tr><tr><td>FARNELL</td><td>Buy Now ▶</td><td>Europe and Asia</td><td>500</td></tr><tr><td>FUTURE</td><td>Buy Now ▶</td><td>Worldwide</td><td>500</td></tr><tr><td>NEWARK</td><td>Buy Now ▶</td><td>Americas</td><td>500</td></tr></table>	DIGIKEY	Buy Now ▶	Worldwide	0	FARNELL	Buy Now ▶	Europe and Asia	500	FUTURE	Buy Now ▶	Worldwide	500	NEWARK	Buy Now ▶	Americas	500	\$0.89 each at 1K+ pcs	reel of 250 								
DIGIKEY	Buy Now ▶	Worldwide	0																										
FARNELL	Buy Now ▶	Europe and Asia	500																										
FUTURE	Buy Now ▶	Worldwide	500																										
NEWARK	Buy Now ▶	Americas	500																										
LMP8640MKE-H/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks Samples	<table><tr><td colspan="2">Distributor</td><td>Region</td><td>Qty</td></tr><tr><td>DIGIKEY</td><td>Buy Now ▶</td><td>Worldwide</td><td>0</td></tr><tr><td>FARNELL</td><td>Buy Now ▶</td><td>Europe and Asia</td><td>496</td></tr><tr><td>FUTURE</td><td>Buy Now ▶</td><td>Worldwide</td><td>500</td></tr><tr><td>NEWARK</td><td>Buy Now ▶</td><td>Americas</td><td>496</td></tr></table>	Distributor		Region	Qty	DIGIKEY	Buy Now ▶	Worldwide	0	FARNELL	Buy Now ▶	Europe and Asia	496	FUTURE	Buy Now ▶	Worldwide	500	NEWARK	Buy Now ▶	Americas	496	\$0.89 each at 1K+ pcs	reel of 250 				
Distributor		Region	Qty																										
DIGIKEY	Buy Now ▶	Worldwide	0																										
FARNELL	Buy Now ▶	Europe and Asia	496																										
FUTURE	Buy Now ▶	Worldwide	500																										
NEWARK	Buy Now ▶	Americas	496																										
LMP8640MKE-T/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks Samples	<table><tr><td colspan="2">Distributor</td><td>Region</td><td>Qty</td></tr><tr><td>ARROW</td><td>Buy Now ▶</td><td>Worldwide</td><td>1000</td></tr><tr><td>DIGIKEY</td><td>Buy Now ▶</td><td>Worldwide</td><td>485</td></tr><tr><td>FARNELL</td><td>Buy Now ▶</td><td>Europe and Asia</td><td>500</td></tr><tr><td>FUTURE</td><td>Buy Now ▶</td><td>Worldwide</td><td>500</td></tr><tr><td>NEWARK</td><td>Buy Now ▶</td><td>Americas</td><td>500</td></tr></table>	Distributor		Region	Qty	ARROW	Buy Now ▶	Worldwide	1000	DIGIKEY	Buy Now ▶	Worldwide	485	FARNELL	Buy Now ▶	Europe and Asia	500	FUTURE	Buy Now ▶	Worldwide	500	NEWARK	Buy Now ▶	Americas	500	\$0.89 each at 1K+ pcs	reel of 250 
Distributor		Region	Qty																										
ARROW	Buy Now ▶	Worldwide	1000																										
DIGIKEY	Buy Now ▶	Worldwide	485																										
FARNELL	Buy Now ▶	Europe and Asia	500																										
FUTURE	Buy Now ▶	Worldwide	500																										
NEWARK	Buy Now ▶	Americas	500																										
LMP8640MKX-F/NOPB RoHS Status	 TSOT	Full production Lead Time: 17 weeks	<table><tr><td colspan="2">Distributor</td><td>Region</td><td>Qty</td></tr><tr><td>DIGIKEY</td><td>Buy Now ▶</td><td>Worldwide</td><td>0</td></tr></table>	Distributor		Region	Qty	DIGIKEY	Buy Now ▶	Worldwide	0	\$0.89 each at 1K+ pcs	reel of 3000 																
Distributor		Region	Qty																										
DIGIKEY	Buy Now ▶	Worldwide	0																										
LMP8640MKX-H/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	<table><tr><td colspan="2">Distributor</td><td>Region</td><td>Qty</td></tr><tr><td>DIGIKEY</td><td>Buy Now ▶</td><td>Worldwide</td><td>0</td></tr></table>	Distributor		Region	Qty	DIGIKEY	Buy Now ▶	Worldwide	0	\$0.89 each at 1K+ pcs	reel of 3000 																
Distributor		Region	Qty																										
DIGIKEY	Buy Now ▶	Worldwide	0																										
LMP8640MKX-T/NOPB RoHS Status	 TSOT	Full production Lead Time: 6 weeks	<table><tr><td colspan="2">Distributor</td><td>Region</td><td>Qty</td></tr><tr><td>DIGIKEY</td><td>Buy Now ▶</td><td>Worldwide</td><td>0</td></tr></table>	Distributor		Region	Qty	DIGIKEY	Buy Now ▶	Worldwide	0	\$0.89 each at 1K+ pcs	reel of 3000 																
Distributor		Region	Qty																										
DIGIKEY	Buy Now ▶	Worldwide	0																										

Part Number(s) (NSID)	Description	Availability	Current Reported Stock			Budgetary Pricing	Pack Size	
LMP8640HV-FEVAL	Evaluation Board for LMP8640	Full production Lead Free (RoHS)	Distributor		Region	Qty	\$185.00 each	1
			DIGIKEY	Buy Now ▶	Worldwide	8		
			NATIONAL	Buy Now ▶	Worldwide	16		
Description: The LMP8640HV-F Current Sense Evaluation Board is designed to evaluate the LMP8640HV-F, Precision Current Sensing Amplifier with fixed gain of 50V/V. This board show a typical configuration of a bidirectional current sense with two LMP8640HV-F parts mounted on the PCB together with the required de-coupling capacitor, power supply connections, Input and Output connectors. Contents: - Assembled LMP8640HV-FEVAL Board - LMP8640 AN-1975 Also available are: LMP8640HV-HEVAL LMP8640HV-TEVAL								



Part Number(s) (NSID)	Description	Availability	Current Reported Stock			Budgetary Pricing	Pack Size
LMP8640HV-HEVAL	Evaluation Board for LMP8640	Full production Lead Free (RoHS)	Distributor NATIONAL	Region Worldwide	Qty 7	\$185.00 each	1
Description: The LMP8640HV-H Current Sense Evaluation Board is designed to evaluate the LMP8640HV-H, Precision Current Sensing Amplifier with fixed gain of 100V/V. This board show a typical configuration of a bidirectional current sense with two LMP8640HV-H parts mounted on the PCB 							



together with the required de-coupling capacitor, power supply connections, Input and Output connectors.

Contents:

- Assembled LMP8640HV-HEVAL Board
- LMP8640 AN-1975

Also available are:

- [LMP8640HV-FEVAL](#)
- [LMP8640HV-TEVAL](#)

Part Number(s) (NSID)	Description	Availability	Current Reported Stock				Budgetary Pricing	Pack Size
LMP8640HV-TEVAL	Evaluation Board for LMP8640	Full production Lead Free (RoHS)	Distributor		Region	Qty	\$185.00 each	1
			DIGIKEY	Buy Now ▶	Worldwide	7		
			NATIONAL	Buy Now ▶	Worldwide	18		

Description:

The LMP8640HV-T Current Sense Evaluation Board is designed to evaluate the LMP8640HV-T, Precision Current Sensing Amplifier with fixed gain of 20V/V. This board show a typical configuration of a bidirectional current sense with two LMP8640HV-T parts mounted on the PCB together with the required de-coupling capacitor, power supply connections, Input and Output connectors.

Contents:

- Assembled LMP8640HV-TEVAL Board
- LMP8640 AN-1975

Also available are:

- [LMP8640HV-FEVAL](#)
- [LMP8640HV-HEVAL](#)

**Advanced Search**[Get Answers](#)

Limit your search :

Product Information

- ☐ Analog
- ☐ Datasheets
- ☐ Product Folders - New
- ☐ Product Folders - Other
- ☐ Eval Boards
- ☐ Packaging
- ☐ Partners
- ☐ Automotive Solutions
- ☐ SolarMagic Solutions

Design Information

- ☐ Answers/FAQs
- ☐ Analog Univ
- ☐ Application Briefs
- ☐ Application Notes
- ☐ Bob Pease Articles
- ☐ Misc Documents
- ☐ National Edge
- ☐ Online Seminars
- ☐ Reference Designs
- ☐ WEBENCH Tools

Company Information

- ☐ Company
- ☐ Community
- ☐ Quality
- ☐ Secured Documents

[Site Map](#) | [About "Cookies"](#) | [National is ISO/TS16949 Certified](#) | [Privacy/Security Statement](#) | [Contact Us/Feedback](#) | [RSS Feed](#) | [Site Terms & Conditions of Use](#)

Copyright © 2010 National Semiconductor Corporation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Amplifiers](#) ***category:***

Click to view products by [Texas Instruments](#) ***manufacturer:***

Other Similar products are found below :

[LT6100IMS8#TRPBF](#) [WS74285C-8/TR](#) [INA181A1IDCKR](#) [TP181A3-CR](#) [LTC6102IDD#TRPBF](#) [INA241A2IDR](#) [LMP8640MKE-F](#)
[INA296A1IDGKR](#) [NCS7030DM2G014R2G](#) [NCS7031DM1G020R2G](#) [NCV7031D1G020R2G](#) [NCV7030DM2G014R2G](#)
[NCV7031DM1G020R2G](#) [INA212BIDCKR](#) [TSC102IYPT](#) [MAX4080FAUA+T](#) [INA240A3PWR](#) [INA199C3DCKT](#) [LTC6102CMS8#TRPBF](#)
[LT6106CS5#TRPBF](#) [INA214CIDCKR](#) [INA199C2DCKT](#) [AD8211WYRJZ-R7](#) [INA199C1DCKT](#) [INA199C3DCKR](#) [INA212BIRSWR](#)
[INA199C2DCKR](#) [INA212CIDCKT](#) [INA210CIDCKT](#) [INA214BQDCKRQ1](#) [INA199C3RSWR](#) [INA213CQDCKRQ1](#) [INA212CIDCKR](#)
[INA211BQDCKRQ1](#) [INA212CIRSWT](#) [INA231AIYFDR](#) [INA211CIRSWT](#) [INA213CIDCKR](#) [INA214CIRSWR](#) [INA240A3PW](#)
[INA215BIDCKR](#) [INA214CIDCKT](#) [NTE1609](#) [NTE955MC](#) [NTE955SM](#) [NTE978](#) [NTE978C](#) [NTE978SM](#) [AD8211YRJZ-RL7](#)
[AD8214ARMZ-R7](#)