


Ivy Carrier Board V1.0

HW Datasheet

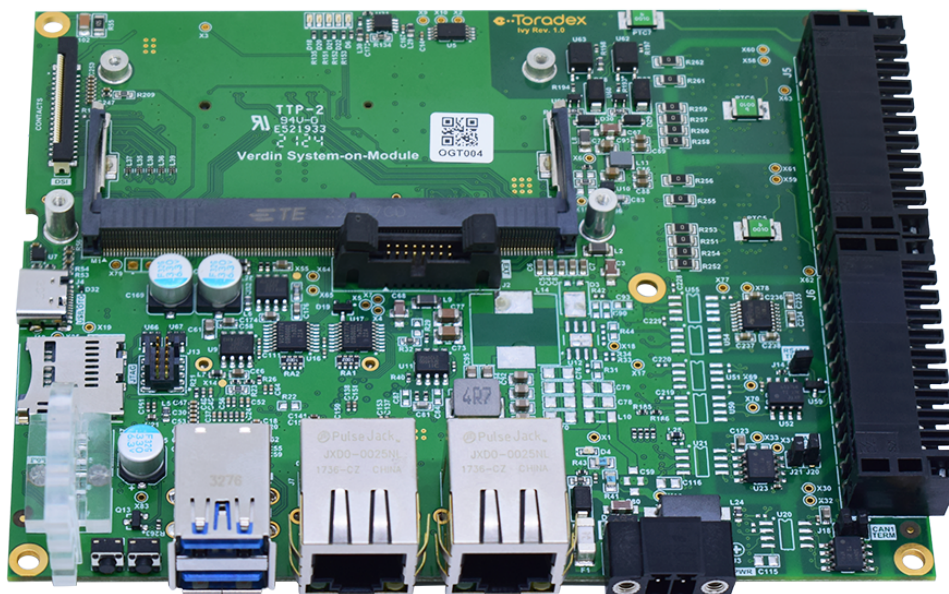

Revision History

Document Revisions

Date	Doc. Revision	Product Version	Changes
24-Oct-2024	Rev. 1.0	V1.0	Initial version Ivy and Ivy Plus

Contents

1	Introduction	3
1.1	Reference Documents	3
1.1.1	Verdin Family Specification	3
1.1.2	Verdin Carrier Board Design Guide	3
1.1.3	Verdin System on Module family overview	3
1.1.4	Toradex Developer Website – Verdin System on Module documents	3
1.2	Abbreviations	4
1.3	Main Features	6
1.4	Block Diagram	8
1.5	Physical Drawing	9
1.5.1	Top Side Connectors	9
1.5.2	Bottom Side Connectors	10
2	Interface Description	11
2.1	Verdin System-On-Module	11
2.2	Power Supply	11
2.3	LEDs Functions	12
2.4	Status LEDs	12
2.5	CAN Transceivers	12
2.6	RS-232/RS-485	13
2.7	Relays	14
2.8	ADC/Analog Inputs	14
2.9	Digital Inputs	15
2.10	Extension Connector	15
2.11	Miscellaneous Peripherals	16
2.12	Buttons	16
3	Operating Conditions	17
3.1	Operating Temperature Range	17
4	Product Compliance	17

1 Introduction

Ivy is a carrier board for the Verdin family of System-on-Modules (SoMs) / Computer-on-modules (CoMs). Ivy is designed to be use in a industrial enviroment.

1.1 Reference Documents

For detailed technical information, please refer to the documents listed below.

1.1.1 Verdin Family Specification

<https://docs.toradex.com/109262-verdin-family-specification.pdf>

1.1.2 Verdin Carrier Board Design Guide

<https://docs.toradex.com/108140-verdin-carrier-board-design-guide.pdf>

1.1.3 Verdin System on Module family overview

<https://www.toradex.com/computer-on-modules/Verdin-arm-family>

1.1.4 Toradex Developer Website – Verdin System on Module documents

<https://developer.toradex.com/products/verdin-som-family/modules>

1.2 Abbreviations

Table 1: Abbreviations

Abbreviation	Explanation
ADC	Analog to Digital Converter
CAN	Controller Area Network, a bus that is mainly used in the automotive and industrial environment
CAN FD	Controller Area Network Flexible Data-Rate, an extension to the original CAN bus protocol which allows higher data rates and larger message sizes.
CEC	Consumer Electronic Control, HDMI feature that allows controlling CEC compatible devices
CPU	Central Processor Unit
CSI	Camera Serial Interface
DAC	Digital to Analog Converter
DDC	Display Data Channel, interface for reading out the capability of a monitor. In this document DDC2B (based on I2C) is always meant.
DFP	Downstream Facing Port, USB Type-C port that acts as a host
DRP	Dual-Role Port, USB Type-C port that can operate as power sink and source
DSI	Display Serial Interface
DVI	Digital Visual Interface, digital signals are electrically compatible with HDMI
EDID	Extended Display Identification Data, timing setting information provided by the display in a PROM
EMI	Electromagnetic Interference, high-frequency disturbances
ESD	Electrostatic Discharge, high voltage spike or spark that can damage electrostatic-sensitive devices
FPD-Link	Flat Panel Display Link, high-speed serial interface for liquid crystal displays. In this document is also called the LVDS interface.
GBE	Gigabit Ethernet, Ethernet interface with a maximum data rate of 1000Mbit/s
GND	Ground
GND_CHASSIS	Chassis Ground
GPIO	General Purpose Input/Output, pin that can be configured as an input or output
GSM	Global System for Mobile Communications
HDA	High-Definition Audio (HD Audio), the digital audio interface between CPU and audio codec
I2C	Inter-Integrated Circuit, the two-wire interface for connecting low-speed peripherals
I2S	Integrated Interchip Sound, serial bus for connecting PCM audio data between two devices
I/O	Input-Output
JTAG	Joint Test Action Group, widely used debug interface
LCD	Liquid Crystal Display
LSB	Least Significant Bit
LVDS	Low-Voltage Differential Signaling, electrical interface standard that can transport high-speed signals over twisted-pair cables. Many interfaces like PCIe or SATA use this interface. Since the first successful application was the Flat Panel Display Link, LVDS became a synonymous for this interface. In this document, the term LVDS is used for the FPD-Link interface.
MAC	Medium Access Control is part of the second layer (data link layer) in the Ethernet stack
MIPI	Mobile Industry Processor Interface Alliance
MDI	Medium Dependent Interface, the physical interface between Ethernet PHY and cable connector
MDIO	Management Data Input/Output, an interface that is used for controlling the Ethernet PHY. The bus consists of the MDC clock and the MDIO bidirectional data signal.
mini PCIe	PCI Express Mini Card, the card form factor for internal peripherals. The interface features PCIe and USB 2.0 connectivity
MMC	MultiMediaCard, flash memory card

Continued on next page

Table 1: Abbreviations (Continued)

Abbreviation	Explanation
MSB	Most Significant Bit
NC	Not Connected
OD	Open-Drain
OTG	USB On-The-Go, a USB host interface that can also act as USB client when connected to another host interface
PCB	Printed Circuit Board
PCI	Peripheral Component Interconnect, parallel computer expansion bus for connecting peripherals
PCIe	PCI Express, a high-speed serial computer expansion bus, replaces the PCI bus
PCM	Pulse-Code Modulation, digitally representation of analog signals, standard interface for digital audio
PD	Pull-Down Resistor
PHY	The physical layer of the OSI model
PU	Pull-up Resistor
PWM	Pulse-Width Modulation
PWR	Power
QSPI	Quad SPI, SPI interface with four bidirectional data signals
RGMII	Reduced Gigabit Media-Independent Interface, the interface between Ethernet MAC and PHY for up to 1Gb/s
RJ45	Registered Jack, common name for the 8P8C modular connector that is used for Ethernet wiring
RS232	The single-ended serial port interface
RS485	Differential signaling serial port interface, half-duplex, multi-drop configuration possible
R-UIM	Removable User Identity Module, identifications card for CDMA phones and networks, an extension of the GSM SIM card
SD	Secure Digital, flash memory card
SDIO	Secure Digital Input Output, an external bus for peripherals that uses the SD interface
SIM	Subscriber Identification Module, an identification card for GSM phones
SMBus	System Management Bus (SMB), a two-wire bus based on the I ² C specifications, is used in x86 designs for system management.
SoC	System on a Chip, IC which integrates the main component of a computer on a single chip
SoM	System on a Module, PCB which integrates the main component of a computer on a single board
SPI	Serial Peripheral Interface Bus, synchronous four-wire full-duplex bus for peripherals
TIM	Thermal Interface Material, thermally conductive material between CPU and heat spreader or heat sink
TMDS	Transition-Minimized Differential Signaling, serial high-speed transmitting technology that is used by DVI and HDMI
TVS Diode	Transient-Voltage-Suppression Diode, a diode that is used to protect interfaces against voltage spikes
UFP	Upstream Facing Port, USB Type-C port that acts as a client
UART	Universal Asynchronous Receiver/Transmitter, serial interface, in combination with a transceiver an RS232, RS422, RS485, IrDA or similar interface can be achieved
USB	Universal Serial Bus, serial interface for internal and external peripherals


1.3 Main Features

- Power
 - Ivy - DC 8 to 32V, 2A
 - Ivy Plus - DC 8 to 72V, 2A
- Operating temperature range: -40 to 85 °C
- 4x SOM ADC input to measure major power rails (Vin, 5V, 3V3, 1V8)
- 3x GPIO controlled tri color status LEDs (D9 green is always on)
- 2x CAN-FD transceiver, with 120 ohm split termination
 - Ivy - Non-Isolated CAN
 - Ivy Plus - Isolated CAN
- 1x RS-232 Interface, with flow control
 - Ivy - Non-Isolated RS-232
 - Ivy Plus - Isolated RS-232
- 1x RS-485 Interface, with 120 ohm termination
 - Ivy - Non-Isolated RS-485
 - Ivy Plus - Isolated RS-485
- 1x Gigabit Ethernet connector to SOM
- 1x Gigabit Ethernet RGMII (DP83867)
- 2x USB 3.0 Type A connector
- 1x USB 2.0 OTG on USB-C connector, typically used for Linux image reflash
- Micro SD card connector
- 1.8V UART connection for Linux console connection (J17)
- 4x GPIO controlled +/-32V photorelays
- 1x Ivy Plus only: TPM 2.0 IC on SPI bus
- 1x Ivy Plus only: 32 KB SPI FRAM
- 1x I2C temperature sensor
- 1x 32 KB I2C EEPROM
- 2x Analog inputs for ADC measurement, with configuration of 0 to 33V or 0 to 20mA
 - Ivy – Non-Isolated
 - Ivy Plus – Isolated
- 2x Digital inputs, 5 to 32V input voltage
- MIPI DSI connector for Toradex Capacitive Touch Display
- JTAG connector
- RTC backup battery holder for CR1216/1220/1225
- MiniPCle connector
 - Can be used for LTE modem, Ethernet card or other MiniPCle cards
 - PCle signals (for Ethernet cards)
 - USB 2.0 (for LTE modems)
 - 3x LEDs
 - Nano SIM card connector
- Reset and Recovery mode buttons
- Extension connector with the following
 - 1x SPI interface
 - 2x I2C interfaces
 - 5V, 3V3, 1V8 power

- Size of the board 130mm x 105mm

1.4 Block Diagram

Figure 1: Ivy Carrier Board Hardware Architecture

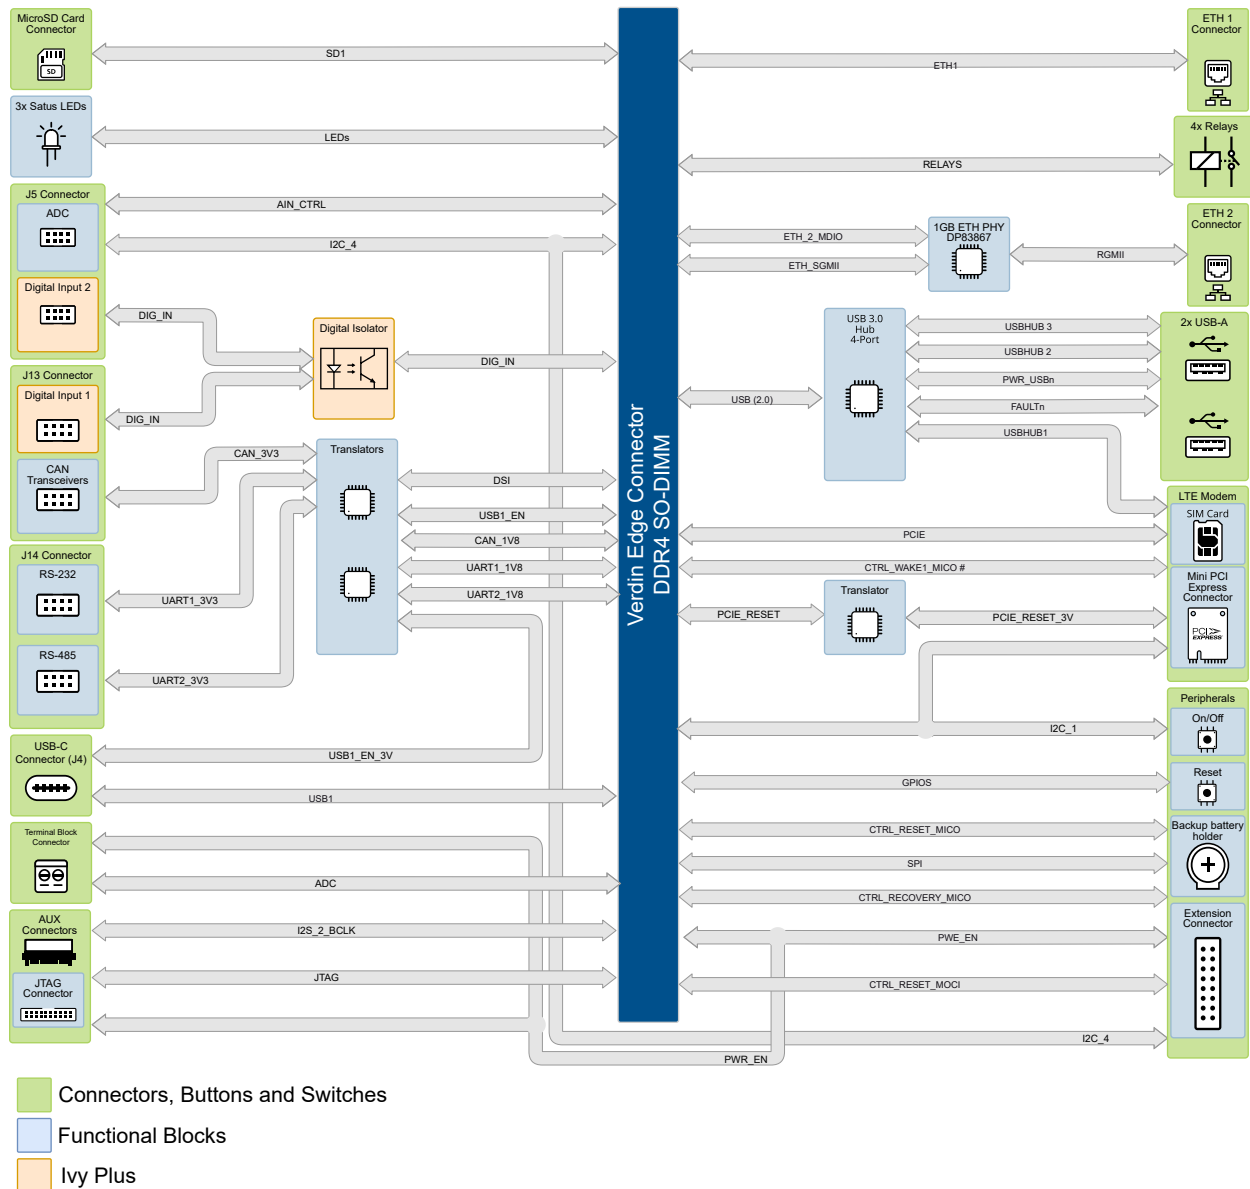

1.5 Physical Drawing

1.5.1 Top Side Connectors

Figure 2: Ivy Carrier Board top side connectors

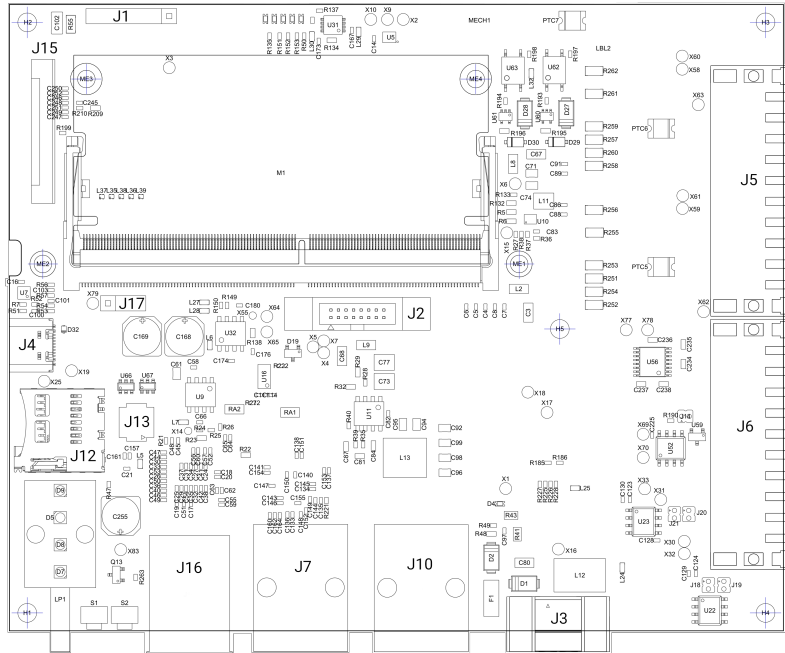


Table 2: List of top side connectors

Connector	Manufacture	Part Num.	Side	Description
J1	N/A	N/A	Top	6 pin header 3.3V UART connection for Linux console
J2	CNC	3210-16-001-12-00	Top	Extension connector
J3	Molex	0395061002	Top	Main power connector
J4	GCT	USB4105-GF-A-120	Top	USB 2.0 OTG, Type-C typically used for linux image reflash
J5,J6	Weidmuller	1728640000	Top	Field Connectors Gigabit Ethernet
J7	Pulse	JXD0-0025NL	Top	Gigabit Ethernet
J9	GCT	SIM8055-6-1-14-00-A	Top	SIM Card connector
J10	Pulse	JXD0-0025NL	Top	Gigabit Ethernet
J12	GCT	MEM2052-00-195-00-A	Top	Micro SD Card connector
J15	Wurth	687134149022	Top	MIPI DSI connector for Toradex Capacitive Touch Display
J16	Amphenol	GSB4112312HR	Top	2x USB3.0 Type A connectors
J17	N/A	N/A	Top	3 pin header. 1.8V UART connection for Linux console

1.5.2 Bottom Side Connectors

Figure 3: Ivy Carrier Board Bottom side connectors

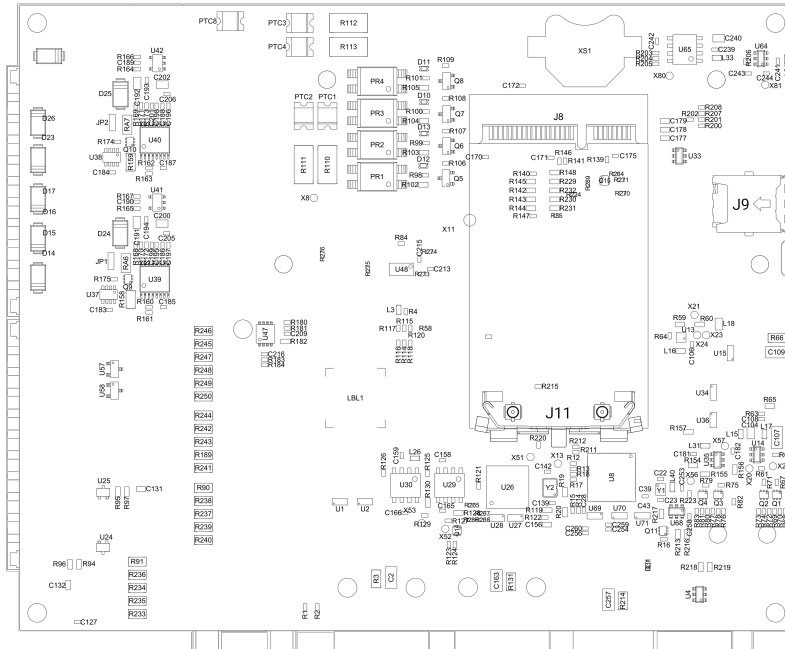


Table 3: List of bottom side connectors

Connector	Manufacture	Part Num.	Side	Description
X51	Keystone	3000	Bottom	Battery holder coin 1261/1220/1225
J8	TE Connectivity	1775862-2	Bottom	MiniPCIe card slot, full size
J9	GCT	SIM8055-6-1-12-00-A	Bottom	SIM Card connector

2 Interface Description

2.1 Verdin System-On-Module

Connector Type: DDR4 SO-DIMM 260 pin Socket

Manufacturer TE-2309409-2

For the pinout of the Verdin SoM, please refer to the applicable Verdin SoM datasheet. Standoffs are available on the Ivy Carrier Board for fixing the Verdin SoM to the carrier board.

2.2 Power Supply

The Ivy Carrier Board has a power connector J3, with the polarity as show in the following table:

Table 4: Power Input Connector (J3).

Pin	Signal Name	Voltage/Range
2	+V_PWR_IN_1	8V-32V ¹ , 2A
1	GND_IN	

¹ In the Ivy plus module the voltage are 8V - 72V, 2A.

Board power varies with version of board - Ivy: Rating 8 to 32VDC, 2A - Ivy Plus: Rating 8 to 72VDC, 2A

Power consumption varies with type of SOM, connected peripherals (especially type and number of connected USB devices). With no external devices connected, board and SOM will use typically between 4 and 6 watts. Fuse F1 is installed on power input line, located near power connector, with rating 5A, part number Bel 0680L5000-05.

2.3 LEDs Functions

Table 5: LED functions.

LED	Colour	Side	Function - LED is on when
D4	Green	Top	Power is applied at input J3
D5	Green	Top	3.3V power rail is active
D6	Green	Top	5V power rail is active
D7	Tri-colour (RGB)	Top	GPIO control signals are high see status LED section for details
D8	Tri-colour (RGB)	Top	GPIO control signals are high see status LED section for details
D9	Tri-colour (RGB)	Top	GPIO control signals are high see status LED section for details
D10	Green	Bottom	PR3 relay is enabled
D11	Green	Bottom	PR4 relay is enabled
D12	Green	Bottom	PR2 relay is enabled
D13	Green	Bottom	PR1 relay is enabled
D18	Green	Top	3.3V PCIe power rail is active
D20	Green	Top	MiniPCIe device enabled WWAN LED signal
D21	Green	Top	MiniPCIe device enabled WLAN LED signal
D22	Green	Top	MiniPCIe device enabled WPAN LED signal

2.4 Status LEDs

Table 6: Status LED information.

LED	Colour	GPIO Signal (High to enable)	SODIMM #
D7	Blue	LED.GPIO1	SODIMM 30
	Green	LED.GPIO2	SODIMM 32
	Red	LED.GPIO3	SODIMM 34
D8	Blue	LED.GPIO4	SODIMM 36
	Green	LED.GPIO5	SODIMM 54
	Red	LED.GPIO6	SODIMM 44
D9	Blue	LED.GPIO7	SODIMM 46
	Green	N/A	N/A
	Red	LED.GPIO8	SODIMM 48



Note

D9 green LED is always on, and cannot be controlled.

2.5 CAN Transceivers

CAN transceivers on Ivy are isolated in the Ivy Plus, and non-isolated in the Ivy. CAN buses 1 and 2 are equipped with split termination that is set through Jumpers. J18, J19 set CAN1 terminations, and J20, J21 set CAN2 terminations. The two CAN buses go to field connector J6, where it has the following pinout:

Table 7: CAN signals

J6 Pin number	Signal
1	GND_CAN1
2	CAN1_H
3	GND_CAN1
4	CAN1_L
5	GND_CAN2
6	GND2_H
7	GND_CAN2
8	CAN2_L

The CAN buses are terminated with a split-style termination. To enable this termination, insert jumpers to J18 and J19 (for CAN1), and J20 and J21 (for CAN2).

2.6 RS-232/RS-485

The Ivy board is equipped with a full duplex RS-232 transceiver, and a half duplex RS-485 Transceiver. The RS-232 and RS-485 interfaces are isolated in the Ivy Plus, and non-isolated in the Ivy. RS485 Termination is set using Jumper J14. The RS-232 and RS-485 interfaces go to field connector J6. See below for the pinout:

Table 8: RS-232 and RS-485 transceiver signals

J6 Pin number	Signal	SOM Interface
9	GND_485	UART2_TX UART2_RX UART2_RTS
10	RS485_P	
11	GND_485	
12	RS485_N	
13	GND_RS232	N/A
14	GND_RS232	N/A
15	RS232_TX	UART1_TX
16	RS232_RX	UART1_RX
17	RS232_RTS	UART1_RTS
18	RS232_CTS	UART1_CTS

The RS485 buses are terminated with a simple 120-ohm termination. To enable this termination, insert jumper to J14.

2.7 Relays

Ivy has 4 GPIO controlled photo relays, which can be accessed on field connector J5. These relays should be used with +/- 32V. See the table below for pinout and GPIO information.

Table 9: Photo relay GPIO signal and J5 pinout information.

Photo Relay	GPIO Signal (High to enable)	SODIMM #	J5 Pin number	Signal
PR1	REL1	SODIMM 60	3	PR_OUT1A
			4	PR_OUT1B
PR2	REL2	SODIMM 62	5	PR_OUT2A
			6	PR_OUT2B
PR3	REL3	SODIMM 64	7	PR_OUT3A
			8	PR_OUT3B
PR4	REL4	SODIMM 66	9	PR_OUT4A
			10	PR_OUT4B

2.8 ADC/Analog Inputs

Analog inputs on connector J13 can be used for single-ended or differential measurements. The rating of the ADC is 0-32V, 0-20mA. The analog inputs are isolated in the Ivy Plus and non-isolated in the Ivy.

The ADC used on Ivy is part number ADS1119, and is accessed through the I2C4 interface (SODIMM 93 and 95).

AINx_MODE signal is used to select between single-ended and differential measurement modes:

- AINx_MODE=0 for single-ended/voltage measurement
- AINx_MODE=1 for differential/current measurement
- AIN1_MODE is on SODIMM 216.
- AIN2_MODE is on SODIMM 218.

Signals AIN1_DRDY (SODIMM 220) and AIN2_DRDY (SODIMM 222) are active low digital outputs from the ADC which notifies the processor that new conversion data is ready. AINx_DRDY transitions high when conversion result is latched for output transmission.

The table below show the pinout information for J5.

Table 10: Analog input signals and J5 pinout information.

Analog Input	J5 Pin number	Signal
AIN1	1	AIN1-
	2	AIN1+
N/A	17	PWR1(Vin/0.1A)
	18	PWR2(Vin/0.1A)
AIN2	19	AIN2-
	20	AIN2+

2.9 Digital Inputs

Ivy has 2 optically isolated digital inputs. These inputs activate at 5V, with a maximum input voltage rating of +/-32V. These digital inputs can be accessed through the field connector J5. See the table below for pinout and GPIO information.

Table 11: Digital input GPIO signals and J5 pinout information.

Digital Input	GPIO Signal	SODIMM #	Pin number	Signal
DIO1	DIGI_1	SODIMM 54	11	DIO1-
			12	DIO1+
DIO2	DIGI_2	SODIMM 56	13	DIO2-
			14	DIO2+

2.10 Extension Connector

The extension connector on the Ivy board is a 2×8 16 position IDC connector. The extension connector has 3 power rails (5V, 3.3V, 1.8V), ground, SPI interface with dedicated SPI_CS signal, I2C1 and I2C4 interfaces, 2 GPIOs, and power enable signal. Below is a table of the pinout of the extension connector.

Table 12: Extension connector J2 signal and pinout information.

Pin Number	Signal	Voltage Level
1,2	GND	N/A
3	3V3	3.3V
4	5V	5V
5	PWR_EN	1.8V
6	1V8	1.8V
7	SPI_CLK	1.8V
8	GPIO2 (SODIMM 208)	1.8V
9	SPI_MOSI	1.8V
10	GPIO1 (SODIMM 206)	1.8V
11	SPI_MISO	1.8V
12	SPI_CS	1.8V
13	I2C1_SCL	1.8V
14	I2C4_SCL	1.8V
15	I2C1_SDA	1.8V
16	I2C4_SDA	1.8V

2.11 Miscellaneous Peripherals

Below is a table that lists general peripherals and their corresponding Verdin interfaces.

Table 13: Miscellaneous peripherals

Peripheral	Part Number	Verdin Interface	Notes
USB OTG	N/A	USB_1	
USB Hub	CYUSB3304	USB_2	
Ethernet	N/A	ETH_1	
Ethernet2	DP83867	ETH_2_RGMII	Address 0x02, autoneg, 2ns RX clock skew
TPM	SLM9670	SPI_1	GPIO1 (SODIMM 206) used for chip select
FRAM	MB85RS256	SPI_1	GPIO4 (SODIMM 212) used for chip select
Temp Sens	TMP1075	I2C_1	Address 0x4F
EEPROM	AT24C256C	I2C_1	Address 0x57
SD Card	N/A	SD_1	
MIPI DSI	N/A	DSI_1	
MiniPCle	N/A	PCIE_1 I2C_1 USB_2	
USB 3.0 Type A	N/A	Top USB_2 Bot USB_2	

2.12 Buttons

Buttons S1 and S2 provide a means to reset the SOM module, and put the SOM into recovery mode.

S1 – Reset button. Pressing S1 will issues reset to SOM module.

S2 – Recovery button. Used to enter recovery mode for Linux image reflash.

3 Operating Conditions

3.1 Operating Temperature Range

-40°C to 85°C

4 Product Compliance

Up-to-date information about product compliance such as RoHS, CE, UL-94, Conflict Mineral, REACH, etc. can be found on our [website](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM](#) ***category:***

Click to view products by [Toradex](#) ***manufacturer:***

Other Similar products are found below :

[CY4541](#) [POLYPOD-BGA324](#) [POLYPOD-TQ176](#) [5786](#) [STM3240G-USB/NMF](#) [OM13090UL](#) [ZDSD-Pinboard](#) [081ZYKFB](#)
[LKS32MC077MBS8-K](#) [LKS32MC038Y6P8B-K](#) [LKS32MC071DOC8T8-K](#) [LKS32MC038Y6P8-k](#) [Ai-WB2-32S-Kit](#) [XDS601](#) [VC-02-Kit_EN](#) [Ra-08H-Kit](#) [PB-03M-Kit](#) [Ai-WB2-13-Kit](#) [PB-03F-Kit](#) [Ra-08-Kit](#) [Hi-07SL-Kit](#) [PB-03-Kit](#) [AT-START-F407](#) [FT8132Q-3HALL-FOC+EMF](#) [EPC1EVK-ECGPPG\(FS\)](#) [.ENS1EVKB](#) [HLK-V20-SUIT](#) [JLC-DIG01](#) [JLC-DIG02](#) [LKS32MC057EM6S8-K](#)
[LKS32MC051DC6T8-K](#) [LKS32MC088C6T8-K](#) [LKS32AT039PXL5G6Q9B-3K](#) [LKS32AT039PXL5G6Q9B-K](#) [LKS32MC086N8Q8-K](#)
[LKS32MC037QM6Q8-K](#) [LKS32MC074DF8Q8-K](#) [LKS32MC034DF6Q8-k](#) [LKS32MC051C6T8-K](#) [LKS32MC081C8T8-K](#)
[LKS32MC083C8T8-K](#) [LKS32MC081C8T8-GK](#) [LKS32MC057M6S8-K](#) [LKS32MC037M6S8-K](#) [LKS32MC071C8T8-K](#) [LKS32MC057M6S8-GK](#) [LKS32MC054DF6Q8-K](#) [LKS32AT085C8Q9-K](#) [LKS32MC082K8Q8-K](#) [LKS32MC087M6S8-K](#)