



Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

MAX6715-MAX6729

General Description

The MAX6715–MAX6729 are ultra-low-voltage microprocessor (μ P) supervisory circuits designed to monitor two or three system power-supply voltages. These devices assert a system reset if any monitored supply falls below its factory-trimmed or adjustable threshold and maintain reset for a minimum timeout period after all supplies rise above their thresholds. The integrated dual/triple supervisory circuits significantly improve system reliability and reduce size compared to separate ICs or discrete components.


These devices monitor primary supply voltages (VCC1) from 1.8V to 5.0V and secondary supply voltages (VCC2) from 0.9V to 3.3V with factory-trimmed reset threshold voltage options (see *Reset Voltage Threshold Suffix Guide*). An externally adjustable RSTIN input option allows customers to monitor a third supply voltage down to 0.62V. These devices are guaranteed to be in the correct reset output logic state when either VCC1 or VCC2 remains greater than 0.8V.

A variety of push-pull or open-drain reset outputs along with watchdog input, manual reset input, and power-fail input/output features are available (see *Selector Guide*). Select reset timeout periods from 1.1ms to 1120ms (min) (see *Reset Timeout Period Suffix Guide*). The MAX6715–MAX6729 are available in small 5, 6, and 8-pin SOT23 packages and operate over the -40°C to $+85^{\circ}\text{C}$ temperature range.

Applications

Multivoltage Systems
Telecom/Networking Equipment
Computers/Servers
Portable/Battery-Operated Equipment
Industrial Equipment
Printer/Fax
Set-Top Boxes

Typical Operating Circuit

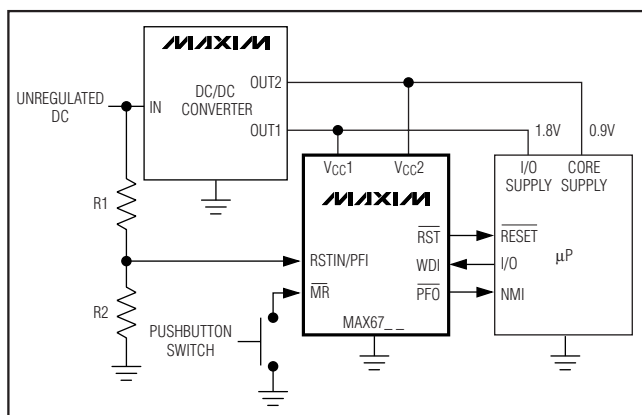

Features

- ◆ VCC1 (primary supply) Reset Threshold Voltages from 1.58V to 4.63V
- ◆ VCC2 (secondary supply) Reset Threshold Voltages from 0.79V to 3.08V
- ◆ Externally Adjustable RSTIN Threshold for Auxiliary/Triple-Voltage Monitoring (0.62V internal reference)
- ◆ Watchdog Timer Option
 - 35s (min) Long Startup Period
 - 1.12s (min) Normal Timeout Period
- ◆ Manual Reset Input Option
- ◆ Power-Fail Input/Power-Fail Output Option (Push-Pull and Open-Drain Active-Low)
- ◆ Guaranteed Reset Valid Down to VCC1 or VCC2 = 0.8V
- ◆ Reset Output Logic Options
- ◆ Immune to Short VCC Transients
- ◆ Low Supply Current 14 μ A (typ) at 3.6V
- ◆ Small 5, 6, and 8-Pin SOT23 Packages

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX6715UT_ _D_ -T	-40°C to $+85^{\circ}\text{C}$	6 SOT23-6
MAX6716UT_ _D_ -T	-40°C to $+85^{\circ}\text{C}$	6 SOT23-6
MAX6717UK_ _D_ -T	-40°C to $+85^{\circ}\text{C}$	5 SOT23-5
MAX6718UK_ _D_ -T	-40°C to $+85^{\circ}\text{C}$	5 SOT23-5
MAX6719UT_ _D_ -T	-40°C to $+85^{\circ}\text{C}$	6 SOT23-6
MAX6720UT_ _D_ -T	-40°C to $+85^{\circ}\text{C}$	6 SOT23-6

Note: The first “_ _” are placeholders for the threshold voltage levels of the devices. Desired threshold levels are set by the part number suffix found in the Reset Voltage Threshold Suffix Guide. The “_” after the D is a placeholder for the reset timeout delay time. Desired delay time is set using the timeout period suffix found in the Reset Timeout Period Suffix Guide. For example the MAX6716UTLTD3-T is a dual-voltage supervisor $V_{TH1} = 4.625\text{V}$, $V_{TH2} = 3.075\text{V}$, and 210ms (typ) timeout period.

Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing “-T” with “+T” when ordering.

Ordering Information continued at end of data sheet.

Pin Configurations and Selector Guide appear at end of data sheet.



Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

ABSOLUTE MAXIMUM RATINGS

Terminal Voltage (with respect to GND)

V_{CC1} , V_{CC2} -0.3V to +6V
 Open-Drain $\overline{RST}$, $\overline{RST1}$, $\overline{RST2}$, $\overline{PFO}$, $\overline{RST}$ -0.3V to +6V
 Push-Pull $\overline{RST}$, $\overline{RST1}$, $\overline{PFO}$, $\overline{RST}$ -0.3V to ($V_{CC1} + 0.3V$)
 Push-Pull $\overline{RST2}$ -0.3V to ($V_{CC2} + 0.3V$)
 $\overline{RSTIN}$, $\overline{PFI}$, $\overline{MR}$, $\overline{WDI}$ -0.3V to +6V
 Input Current/Output Current (all pins) 20mA

Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)

5-Pin SOT23-5 (derate 7.1mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) 571mW
 6-Pin SOT23-6 (derate 8.7mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) 696mW
 8-Pin SOT23-8 (derate 8.9mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) 714mW
 Operating Temperature Range -40°C to $+85^\circ\text{C}$
 Storage Temperature Range -65°C to $+150^\circ\text{C}$
 Junction Temperature $+150^\circ\text{C}$
 Lead Temperature (soldering, 10s) $+300^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{CC1} = V_{CC2} = 0.8V$ to $5.5V$, $GND = 0$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V_{CC}		0.8		5.5	V
Supply Current	I_{CC1}	$V_{CC1} < 5.5V$, all I/O pins open		15	39	μA
		$V_{CC1} < 3.6V$, all I/O pins open		10	28	
	I_{CC2}	$V_{CC2} < 3.6V$, all I/O pins open		4	11	
		$V_{CC2} < 2.75V$, all I/O pins open		3	9	
V_{CC1} Reset Threshold	V_{TH1}	L (falling)	4.500	4.625	4.750	V
		M (falling)	4.250	4.375	4.500	
		T (falling)	3.000	3.075	3.150	
		S (falling)	2.850	2.925	3.000	
		R (falling)	2.550	2.625	2.700	
		Z (falling)	2.250	2.313	2.375	
		Y (falling)	2.125	2.188	2.250	
		W (falling)	1.620	1.665	1.710	
V_{CC2} Reset Threshold	V_{TH2}	V (falling)	1.530	1.575	1.620	V
		T (falling)	3.000	3.075	3.150	
		S (falling)	2.850	2.925	3.000	
		R (falling)	2.550	2.625	2.700	
		Z (falling)	2.250	2.313	2.375	
		Y (falling)	2.125	2.188	2.250	
		W (falling)	1.620	1.665	1.710	
		V (falling)	1.530	1.575	1.620	
		I (falling)	1.350	1.388	1.425	
		H (falling)	1.275	1.313	1.350	
		G (falling)	1.080	1.110	1.140	
		F (falling)	1.020	1.050	1.080	
		E (falling)	0.810	0.833	0.855	
		D (falling)	0.765	0.788	0.810	
Reset Threshold Tempco				20		ppm/ $^\circ\text{C}$
Reset Threshold Hysteresis	V_{HYST}	Referenced to V_{TH} typical		0.5		%

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

MAX6715-MAX6729

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC1} = V_{CC2} = 0.8V$ to $5.5V$, $GND = 0$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
V _{CC} to Reset Output Delay	t _{RD}	V _{CC1} = (V _{TH1} + 100mV) to (V _{TH1} - 100mV) or V _{CC2} = (V _{TH2} + 75mV) to (V _{TH2} - 75mV)	20			μs
Reset Timeout Period	t _{RP}	D1	1.1	1.65	2.2	ms
		D2	8.8	13.2	17.6	
		D3	140	210	280	
		D5	280	420	560	
		D6	560	840	1120	
		D4	1120	1680	2240	
ADJUSTABLE RESET COMPARATOR INPUT (MAX6719/MAX6720/MAX6723–MAX6727)						
RSTIN Input Threshold	V _{RSTIN}		611	626.5	642	mV
RSTIN Input Current	I _{RSTIN}		-25	+25		nA
RSTIN Hysteresis			3			mV
RSTIN to Reset Output Delay	t _{RSTIND}	V _{RSTIN} to (V _{RSTIN} - 30mV)	22			μs
POWER-FAIL INPUT (MAX6728/MAX6729)						
PFI Input Threshold	V _{PFI}		611	626.5	642	mV
PFI Input Current	I _{PFI}		-25	+25		nA
PFI Hysteresis	V _{PFH}		3			mV
PFI to $\overline{PFO}$ Delay	t _{DPF}	(V _{PFI} + 30mV) to (V _{PFI} - 30mV)	2			μs
MANUAL RESET INPUT (MAX6715–MAX6722/MAX6725–MAX6729)						
$\overline{MR}$ Input Voltage	V _{IL}		0.3 × V _{CC1}			V
	V _{IH}		0.7 × V _{CC1}			
$\overline{MR}$ Minimum Pulse Width			1			μs
$\overline{MR}$ Glitch Rejection			100			ns
$\overline{MR}$ to Reset Delay	t _{MR}		200			ns
$\overline{MR}$ Pullup Resistance			25	50	80	kΩ
WATCHDOG INPUT (MAX6721–MAX6729)						
Watchdog Timeout Period	t _{WD}	First watchdog period after reset timeout period	35	54	72	s
		Normal mode	1.12	1.68	2.24	
WDI Pulse Width	t _{WDI}	(Note 2)	50			ns
WDI Input Voltage	V _{IL}		0.3 × V _{CC1}			V
	V _{IH}		0.7 × V _{CC1}			
WDI Input Current	I _{WDI}	WDI = 0 or V _{CC1}	-1	+1		μA

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC1} = V_{CC2} = 0.8V$ to $5.5V$, $GND = 0$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
RESET/POWER-FAIL OUTPUTS						
$\overline{RST}/\overline{RST1}/\overline{RST2}/\overline{PFO}$ Output LOW (Push-Pull or Open-Drain)	V_{OL}	V_{CC1} or $V_{CC2} \geq 0.8V$, $I_{SINK} = 1\mu A$, output asserted			0.3	V
		V_{CC1} or $V_{CC2} \geq 1.0V$, $I_{SINK} = 50\mu A$, output asserted			0.3	
		V_{CC1} or $V_{CC2} \geq 1.2V$, $I_{SINK} = 100\mu A$, output asserted			0.3	
		V_{CC1} or $V_{CC2} \geq 2.7V$, $I_{SINK} = 1.2mA$, output asserted			0.3	
		V_{CC1} or $V_{CC2} \geq 4.5V$, $I_{SINK} = 3.2mA$, output asserted			0.4	
$\overline{RST}/\overline{RST1}/\overline{PFO}$ Output HIGH (Push-Pull Only)	V_{OH}	$V_{CC1} \geq 1.8V$, $I_{SOURCE} = 200\mu A$, output not asserted	$0.8 \times V_{CC1}$			V
		$V_{CC1} \geq 2.7V$, $I_{SOURCE} = 500\mu A$, output not asserted	$0.8 \times V_{CC1}$			
		$V_{CC1} \geq 4.5V$, $I_{SOURCE} = 800\mu A$, output not asserted	$0.8 \times V_{CC1}$			
$\overline{RST2}$ Output HIGH (Push-Pull Only)	V_{OH}	$V_{CC2} \geq 1.8V$, $I_{SOURCE} = 200\mu A$, output not asserted	$0.8 \times V_{CC2}$			V
		$V_{CC2} \geq 2.7V$, $I_{SOURCE} = 500\mu A$, output not asserted	$0.8 \times V_{CC2}$			
		$V_{CC2} \geq 4.5V$, $I_{SOURCE} = 800\mu A$, output not asserted	$0.8 \times V_{CC2}$			
RST Output HIGH (Push-Pull Only)	V_{OH}	$V_{CC1} \geq 1.0V$, $I_{SOURCE} = 1\mu A$, reset asserted	$0.8 \times V_{CC1}$			V
		$V_{CC1} \geq 1.8V$, $I_{SOURCE} = 150\mu A$, reset asserted	$0.8 \times V_{CC1}$			
		$V_{CC1} \geq 2.7V$, $I_{SOURCE} = 500\mu A$, reset asserted	$0.8 \times V_{CC1}$			
		$V_{CC1} \geq 4.5V$, $I_{SOURCE} = 800\mu A$, reset asserted	$0.8 \times V_{CC1}$			
RST Output LOW (Push-Pull or Open Drain)	V_{OL}	V_{CC1} or $V_{CC2} \geq 1.8V$, $I_{SINK} = 500\mu A$, reset not asserted			0.3	V
		V_{CC1} or $V_{CC2} \geq 2.7V$, $I_{SINK} = 1.2mA$, reset not asserted			0.3	
		V_{CC1} or $V_{CC2} \geq 4.5V$, $I_{SINK} = 3.2mA$, reset not asserted			0.4	
$\overline{RST}/\overline{RST1}/\overline{RST2}/\overline{PFO}$ Output Open-Drain Leakage Current		Output not asserted			0.5	μA
RST Output Open-Drain Leakage Current		Output asserted			0.5	μA

Note 1: Devices tested at $+25^{\circ}C$. Overtemperature limits are guaranteed by design and not production tested.

Note 2: Parameter guaranteed by design.


Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Typical Operating Characteristics


($V_{CC1} = 5V$, $V_{CC2} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX6715-MAX6729


SUPPLY CURRENT vs. TEMPERATURE
 $V_{CC1} = 5V$, $V_{CC2} = 3.3V$

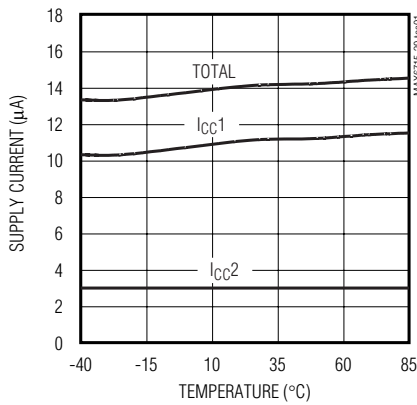


SUPPLY CURRENT vs. TEMPERATURE
 $V_{CC1} = 3.3V$, $V_{CC2} = 2.5V$

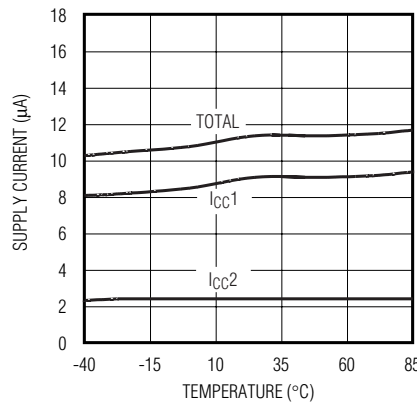


SUPPLY CURRENT vs. TEMPERATURE
 $V_{CC1} = 2.5V$, $V_{CC2} = 1.8V$

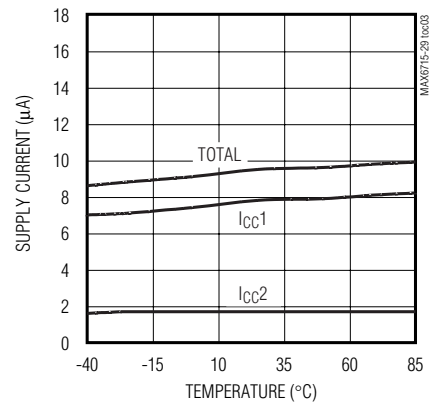


SUPPLY CURRENT vs. TEMPERATURE
 $V_{CC1} = 1.8V$, $V_{CC2} = 1.2V$

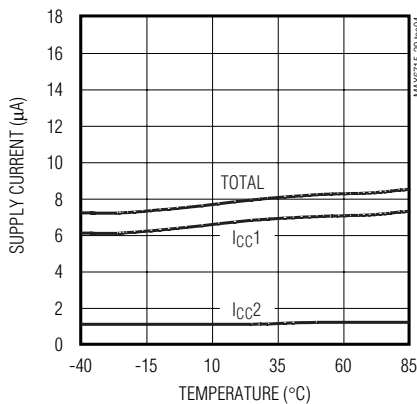


NORMALIZED RESET/WATCHDOG TIMEOUT PERIOD vs. TEMPERATURE

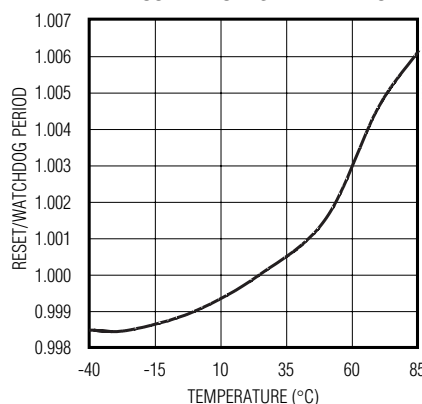


MAXIMUM V_{CC} TRANSIENT DURATION vs. RESET THRESHOLD OVERDRIVE

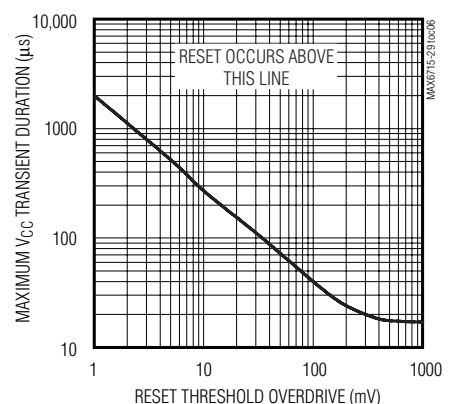


NORMALIZED V_{CC} RESET THRESHOLD vs. TEMPERATURE

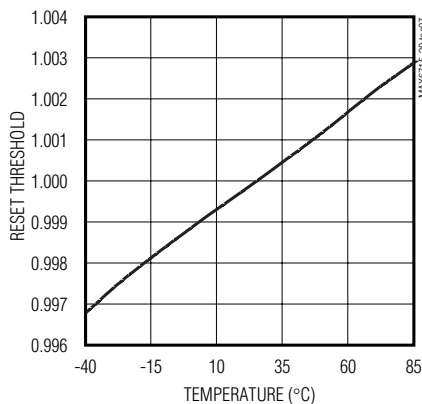

RESET INPUT AND POWER-FAIL INPUT THRESHOLD vs. TEMPERATURE

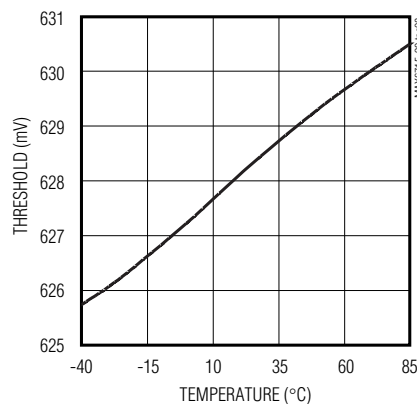




V_{CC} TO RESET DELAY vs. TEMPERATURE

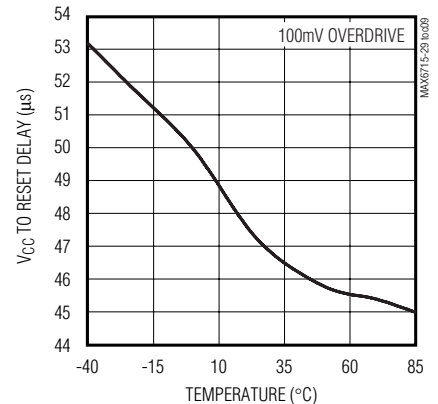

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Typical Operating Characteristics (continued)

(VCC1 = 5V, VCC2 = 3.3V, TA = +25°C, unless otherwise noted.)

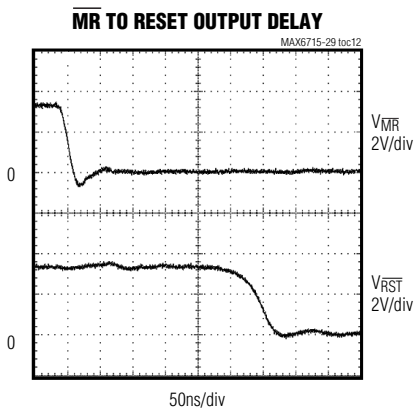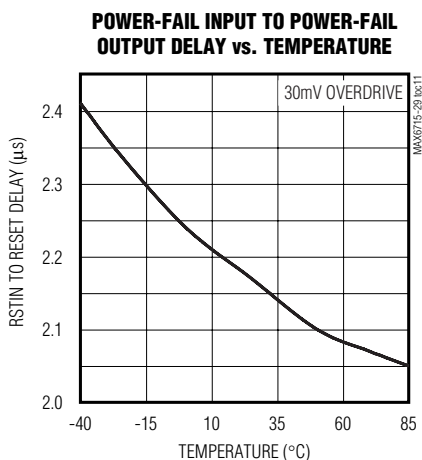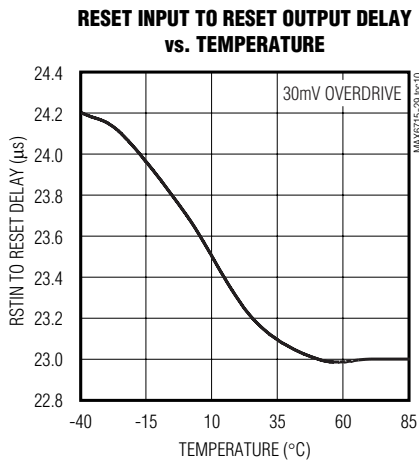

Pin Description

PIN								NAME	FUNCTION
MAX6715/ MAX6716	MAX6717/ MAX6718	MAX6719/ MAX6720	MAX6721/ MAX6722	MAX6723/ MAX6724	MAX6725/ MAX6726	MAX6727	MAX6728/ MAX6729		
1	1	1	1	1	1	1, 4	1	RST/ RST1	Active-Low Reset Output, Open-Drain or Push-Pull. RST/RST1 changes from high to low when VCC1 or VCC2 drops below the selected reset thresholds, RSTIN is below threshold, MR is pulled low, or the watchdog triggers a reset. RST/RST1 remains low for the reset timeout period after VCC1/VCC2/RSTIN exceed the device reset thresholds, MR goes low to high, or the watchdog triggers a reset. Open-drain outputs require an external pullup resistor. Push-pull outputs are referenced to VCC1.

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Pin Description (continued)

PIN								NAME	FUNCTION
MAX6715/ MAX6716	MAX6717/ MAX6718	MAX6719/ MAX6720	MAX6721/ MAX6722	MAX6723/ MAX6724	MAX6725/ MAX6726	MAX6727	MAX6728/ MAX6729		
5	—	—	—	—	—	—	—	$\overline{\text{RST2}}$	Active-Low Reset Output, Open-Drain or Push-Pull. $\overline{\text{RST2}}$ changes from high to low when V_{CC1} or V_{CC2} drops below the selected reset thresholds or $\overline{\text{MR}}$ is pulled low. $\overline{\text{RST2}}$ remains low for the reset timeout period after V_{CC1}/V_{CC2} exceed the device reset thresholds or $\overline{\text{MR}}$ goes low to high. Open-drain outputs require an external pullup resistor. Push-pull outputs are referenced to V_{CC2} .
2	2	2	2	2	2	2	2	GND	Ground
3	3	3	3	—	5	5	5	$\overline{\text{MR}}$	Active-Low Manual Reset Input. Internal $50\text{k}\Omega$ pullup to V_{CC1} . Pull low to force a reset. Reset remains active as long as $\overline{\text{MR}}$ is low and for the reset timeout period after $\overline{\text{MR}}$ goes high. Leave unconnected or connect to V_{CC1} if unused.
4	4	4	4	4	6	6	6	V_{CC2}	Secondary Supply Voltage Input. Powers the device when it is above V_{CC1} and input for secondary reset threshold monitor.
6	5	6	6	6	8	8	8	V_{CC1}	Primary Supply Voltage Input. Powers the device when it is above V_{CC2} and input for primary reset threshold monitor.

MAX6715-MAX6729

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Pin Description (continued)

PIN								NAME	FUNCTION
MAX6715/ MAX6716	MAX6717/ MAX6718	MAX6719/ MAX6720	MAX6721/ MAX6722	MAX6723/ MAX6724	MAX6725/ MAX6726	MAX6727	MAX6728/ MAX6729		
—	—	—	5	3	3	3	3	WDI	Watchdog Input. If WDI remains high or low for longer than the watchdog timeout period, the internal watchdog timer runs out and the reset output asserts for the reset timeout period. The internal watchdog timer clears whenever a reset is asserted or WDI sees a rising or falling edge. The watchdog has a long timeout period (35s min) after each reset event and a short timeout period (1.12s min) after the first valid WDI transition.
—	—	5	—	5	7	7	—	RSTIN	Undervoltage Reset Comparator Input. High-impedance input for adjustable reset monitor. The reset output is asserted when RSTIN falls below the 0.626V internal reference voltage. Set the monitored voltage reset threshold with an external resistor-divider network. Connect RSTIN to V _{CC1} or V _{CC2} if not used.
—	—	—	—	—	—	—	7	PFI	Power-Fail Voltage Monitor Input. High-impedance input for internal power-fail monitor comparator. Connect PFI to an external resistor-divider network to set the power-fail threshold voltage (0.626V typical internal reference voltage). Connect to GND, V _{CC1} , or V _{CC2} if not used.

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Pin Description (continued)

PIN								NAME	FUNCTION
MAX6715/ MAX6716	MAX6717/ MAX6718	MAX6719/ MAX6720	MAX6721/ MAX6722	MAX6723/ MAX6724	MAX6725/ MAX6726	MAX6727	MAX6728/ MAX6729		
—	—	—	—	—	—	—	4	$\overline{\text{PFO}}$	Active-Low Power-Fail Monitor Output, Open-Drain or Push-Pull. $\overline{\text{PFO}}$ is asserted low when PFI is less than 0.626V. $\overline{\text{PFO}}$ deasserts without a reset timeout period. Open-drain outputs require an external pullup resistor. Push-pull outputs are referenced to VCC1.
—	—	—	—	—	4	—	—	RST	Active-High Reset Output, Open-Drain or Push-Pull. RST changes from low to high when VCC1 or VCC2 drops below selected reset thresholds, RSTIN is below threshold, MR is pulled low, or the watchdog triggers a reset. RST remains HIGH for the reset timeout period after VCC1/VCC 2/RSTIN exceed the device reset thresholds, $\overline{\text{MR}}$ goes low to high, or the watchdog triggers a reset. Open-drain outputs require an external pullup resistor. Push-pull outputs are referenced to VCC1.

Detailed Description

Supply Voltages

The MAX6715–MAX6729 microprocessor (μ P) supervisory circuits maintain system integrity by alerting the μ P to fault conditions. These ICs are optimized for systems that monitor two or three supply voltages. The output-reset state is guaranteed to remain valid while either VCC1 or VCC2 is above 0.8V.

Threshold Levels

Input voltage threshold level combinations are indicated by a two-letter code in the *Reset Voltage Threshold*

Suffix Guide (Table 1). Contact factory for availability of other voltage threshold combinations.

Reset Outputs

The MAX6715–MAX6729 provides an active-low reset output (RST) and the MAX6725/MAX6726 provides both an active-high (RST) and an active-low reset output ($\overline{\text{RST}}$). RST, $\overline{\text{RST}}$, $\overline{\text{RST1}}$, and $\overline{\text{RST2}}$ are asserted when the voltage at either VCC1 or VCC2 falls below the voltage threshold level, RSTIN drops below threshold, or MR is pulled low. Once reset is asserted it stays low for the reset timeout period (see Table 2). If VCC1, VCC2, or RSTIN goes below the reset threshold before the reset timeout period is completed, the internal timer

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

restarts. The MAX6715/MAX6717/MAX6719/MAX6721/MAX6723/MAX6725/MAX6727/MAX6728 contain open-drain reset outputs, while the MAX6716/MAX6718/MAX6720/MAX6722/MAX6724/MAX6726/MAX6729 contain push-pull reset outputs. The MAX6727 provides two separate open-drain $\overline{\text{RST}}$ outputs driven by the same internal logic.

Manual Reset Input

Many microprocessor-based products require manual reset capability, allowing the operator, a test technician, or external logic circuitry to initiate a reset. A logic low on $\overline{\text{MR}}$ asserts the reset output. Reset remains asserted while $\overline{\text{MR}}$ is low and for the reset timeout period (t_{RP}) after $\overline{\text{MR}}$ returns high. This input has an internal 50k Ω pullup resistor to V_{CC1} and can be left unconnected if not used. $\overline{\text{MR}}$ can be driven with TTL or CMOS logic levels, or with open-drain/collector outputs. Connect a normally open momentary switch from $\overline{\text{MR}}$ to GND to create a manual reset function; external debounce circuitry is not required. If $\overline{\text{MR}}$ is driven from long cables or if the device is used in a noisy environment, connect a 0.1 μ F capacitor from $\overline{\text{MR}}$ to GND to provide additional noise immunity.

Adjustable Input Voltage

The MAX6719/MAX6720 and MAX6723-MAX6727 provide an additional input to monitor a third system voltage. The threshold voltage at RSTIN is typically 626mV. Connect a resistor-divider network to the circuit as shown in Figure 1 to establish an externally controlled threshold voltage, $V_{\text{EXT_TH}}$.

$$V_{\text{EXT_TH}} = 626\text{mV} \cdot ((R1 + R2)/R2)$$

Low leakage current at RSTIN allows the use of large-valued resistors resulting in reduced power consumption of the system.

Watchdog Input

The watchdog monitors μ P activity through the watchdog input (WDI). To use the watchdog function, connect WDI to a bus line or μ P I/O line. When WDI remains high or low for longer than the watchdog timeout period, the reset output asserts.

The MAX6721-MAX6729 include a dual-mode watchdog timer to monitor μ P activity. The flexible timeout architecture provides a long period initial watchdog mode, allowing complicated systems to complete lengthy boots, and a short period normal watchdog mode, allowing the supervisor to provide quick alerts

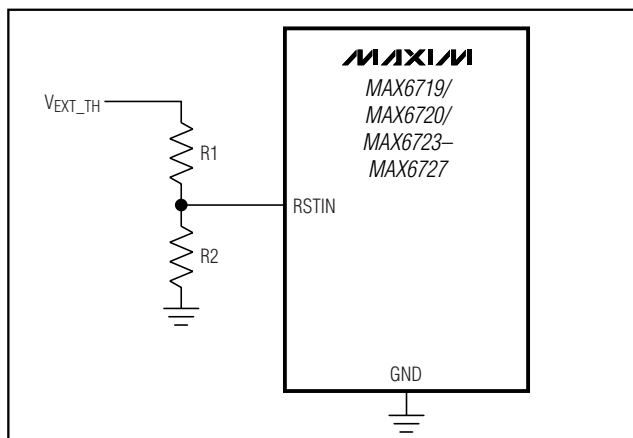


Figure 1. Monitoring a Third Voltage

when processor activity fails. After each reset event (V_{CC} power-up/brownout, manual reset, or watchdog reset), there is a long initial watchdog period of 35s minimum. The long watchdog period mode provides an extended time for the system to power-up and fully initialize all μ P and system components before assuming responsibility for routine watchdog updates.

The normal watchdog timeout period (1.12s min) begins after the first transition on WDI before the conclusion of the long initial watchdog period (Figure 2). During the normal operating mode, the supervisor will issue a reset pulse for the reset timeout period if the μ P does not update the WDI with a valid transition (high-to-low or low-to-high) within the standard timeout period (1.12s min).

Power-Fail Comparator

PFI is the noninverting input to a comparator. If PFI is less than V_{PFI} (626.5mV), PFO goes low. Common uses for the power-fail comparator include monitoring preregulated input of the power supply (such as a battery) or

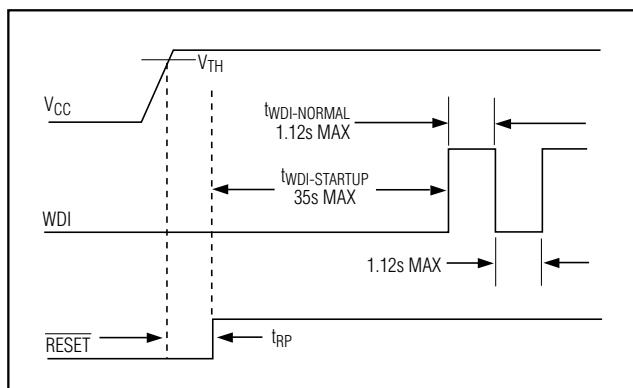


Figure 2. Normal Watchdog Startup Sequence

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

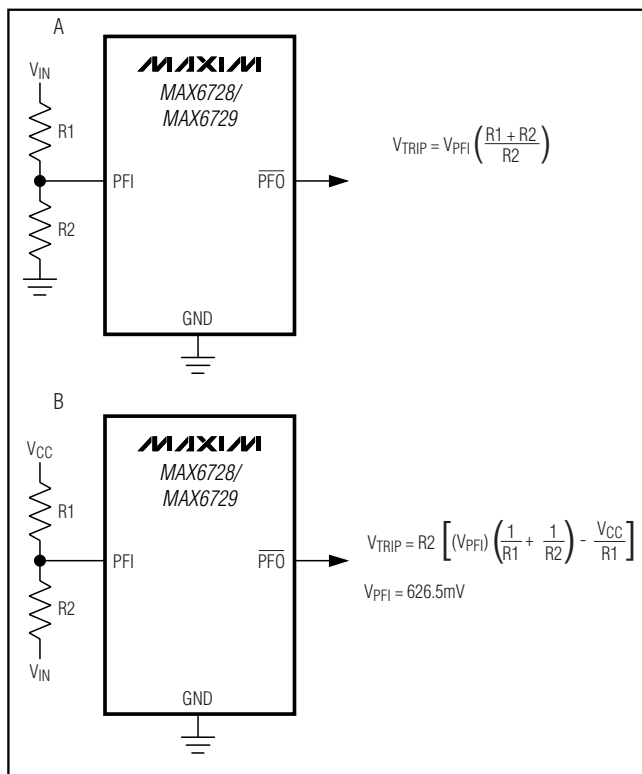


Figure 3. Using Power-Fail Input to Monitor an Additional Power-Supply a) V_{IN} is Positive b) V_{IN} is Negative

providing an early power-fail warning so software can conduct an orderly system shutdown. It can also be used to monitor supplies other than V_{CC1} or V_{CC2} by setting the power-fail threshold with a resistor-divider, as shown in Figure 3. PFI is the input to the power-fail comparator. The typical comparator delay is $2\mu s$ from PFI to $\overline{PFO}$. Connect PFI to ground of V_{CC1} if unused.

Ensuring a Valid Reset Output Down to $V_{CC} = 0$

The MAX6715–MAX6729 are guaranteed to operate properly down to $V_{CC} = 0.8V$. In applications that require valid reset levels down to $V_{CC} = 0$ use a pull-down resistor at $\overline{RST}$ to ground. The resistor value used is not critical, but it must be large enough not to load the reset output when V_{CC} is above the reset threshold. For most applications, $100k\Omega$ is adequate. This configuration does not work for the open-drain outputs of the MAX6715/MAX6717/MAX6719/MAX6721/MAX6723/MAX6725/MAX6727/MAX6728. For push-pull, active-high $\overline{RST}$ output connect the external resistor as a pullup from $\overline{RST}$ to V_{CC1} .

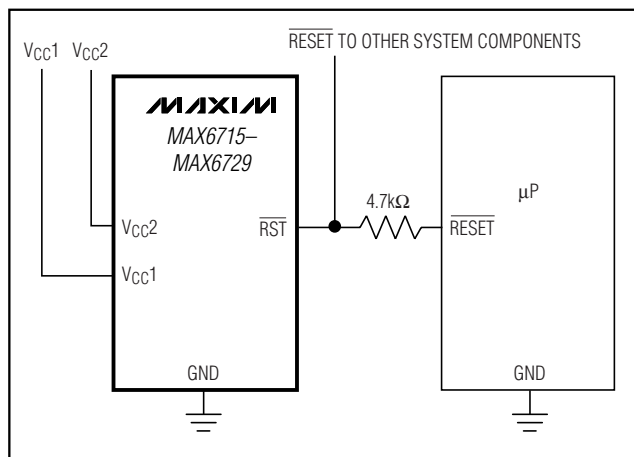


Figure 4. Interfacing to μP s with Bidirectional Reset I/O

Applications Information

Interfacing to μP s with Bidirectional Reset Pins

Most microprocessors with bidirectional reset pins can interface directly to open-drain $\overline{RST}$ output options. Systems simultaneously requiring a push-pull $\overline{RST}$ output and a bidirectional reset interface can be in logic contention. To prevent contention, connect a $4.7k\Omega$ resistor between $\overline{RST}$ and the μP 's reset I/O port as shown in Figure 4.

Adding Hysteresis to the Power-Fail Comparator

The power-fail comparator has a typical input hysteresis of $3mV$. This is sufficient for most applications where a power-supply line is being monitored through an external voltage-divider (see the *Power-Fail Comparator* section). If additional noise margin is desired, connect a resistor between $\overline{PFO}$ and PFI as shown in Figure 5. Select the values of R_1 , R_2 , and R_3 so PFI sees V_{PFI} ($626mV$) when V_{EXT} falls to its power-fail trip point (V_{FAIL}) and when V_{IN} rises to its power-good trip point (V_{GOOD}). The hysteresis window extends between the specified V_{FAIL} and V_{GOOD} thresholds. R_3 adds the additional hysteresis by sinking current from the R_1/R_2 divider network when $\overline{PFO}$ is logic low and sourcing current into the network when $\overline{PFO}$ is logic high. R_3 is typically an order of magnitude greater than R_1 or R_2 .

The current through R_2 should be at least $2.5\mu A$ to ensure that the $25nA$ (max) PFI input current does not significantly shift the trip points. Therefore, $R_2 < V_{PFI}/2.5\mu A < 248k\Omega$ for most applications. R_3 will provide additional hysteresis for $\overline{PFO}$ push-pull ($V_{OH} = V_{CC1}$) or open-drain ($V_{OH} = V_{PULLUP}$) applications.

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

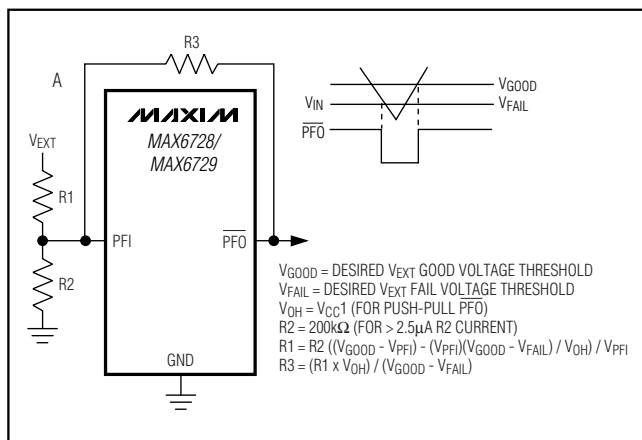


Figure 5. Adding Hysteresis to Power-Fail for Push-Pull PFO

Monitoring an Additional Power Supply

These μ P supervisors can monitor either positive or negative supplies using a resistor voltage-divider to PFI. $\overline{PFO}$ can be used to generate an interrupt to the μ P or cause reset to assert (Figure 3).

Monitoring a Negative Voltage

The power-fail comparator can be used to monitor a negative supply voltage using the circuit shown in Figure 3. When the negative supply is valid, $\overline{PFO}$ is low. When the negative supply voltage drops, $\overline{PFO}$ goes high. The circuit's accuracy is affected by the PFI threshold tolerance, V_{CC} , $R1$, and $R2$.

Negative-Going V_{CC} Transients

The MAX6715-MAX6729 supervisors are relatively immune to short-duration negative-going V_{CC} transients (glitches). It is usually undesirable to reset the μ P when V_{CC} experiences only small glitches. The *Typical Operating Characteristics* show Maximum Transient Duration vs. Reset Threshold Overdrive, for which reset pulses are not generated. The graph was produced using negative-going V_{CC} pulses, starting above V_{TH} and ending below the reset threshold by the magnitude indicated (reset threshold overdrive). The graph shows the maximum pulse width that a negative-going V_{CC} transient may typically have without causing a reset pulse to be issued. As the amplitude of the transient increases (i.e., goes farther below the reset threshold), the maximum allowable pulse width decreases. A $0.1\mu F$ bypass capacitor mounted close to the V_{CC} pin provides additional transient immunity.

Watchdog Software Considerations

Setting and resetting the watchdog input at different points in the program, rather than "pulsing" the watchdog input high-low-high or low-high-low, helps the

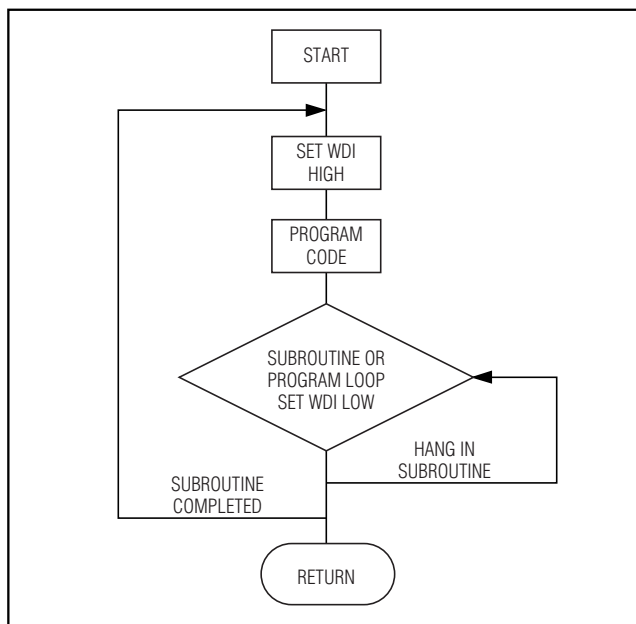


Figure 6. Watchdog Flow Diagram

watchdog timer to closely monitor software execution. This technique avoids a "stuck" loop where the watchdog timer continues to be reset within the loop, keeping the watchdog from timing out. Figure 6 shows an example flow diagram where the I/O driving the watchdog input is set high at the beginning of the program, set low at the beginning of every subroutine or loop, then set high again when the program returns to the beginning. If the program should "hang" in any subroutine, the I/O is continually set low and the watchdog timer is allowed to time out, causing a reset or interrupt to be issued.


Chip Information

TRANSISTOR COUNT: 1072

PROCESS: BiCMOS

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Functional Diagram

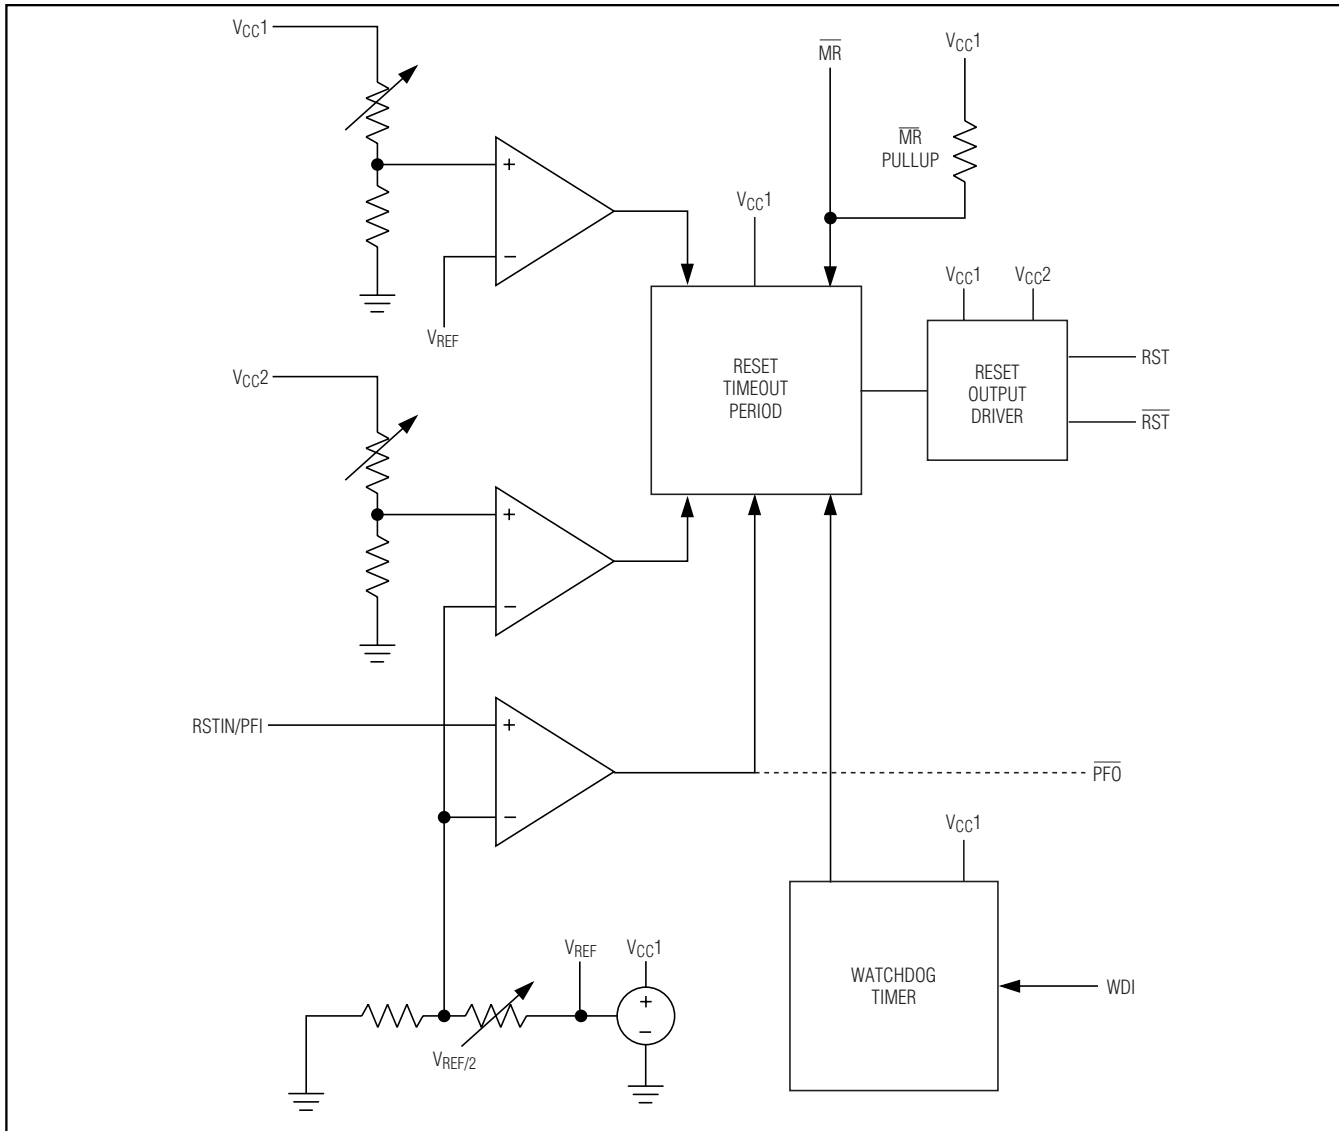

MAX6715-MAX6729

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Selector Guide

PART NUMBER	NUMBER OF VOLTAGE MONITORS	OPEN-DRAIN RESET	OPEN-DRAIN RESET	PUSH-PULL RESET	PUSH-PULL RESET	MANUAL RESET	WATCH-DOG INPUT	POWER-FAIL INPUT/OUTPUT
MAX6715	2	2	—	—	—	√	—	—
MAX6716	2	—	—	2	—	√	—	—
MAX6717	2	1	—	—	—	√	—	—
MAX6718	2	—	—	1	—	√	—	—
MAX6719	3	1	—	—	—	√	—	—
MAX6720	3	—	—	1	—	√	—	—
MAX6721	2	1	—	—	—	√	√	—
MAX6722	2	—	—	1	—	√	√	—
MAX6723	3	1	—	—	—	—	√	—
MAX6724	3	—	—	1	—	—	√	—
MAX6725	3	1	1	—	—	√	√	—
MAX6726	3	—	—	1	1	√	√	—
MAX6727	3	2	—	—	—	√	√	—
MAX6728	3	1	—	—	—	√	√	√ (open drain)
MAX6729	3	—	—	1	—	√	√	√ (push-pull)

Ordering Information (continued)

PART	TEMP RANGE	PIN-PACKAGE
MAX6721UT_ _D_ -T	-40°C to +85°C	6 SOT23-6
MAX6722UT_ _D_ -T	-40°C to +85°C	6 SOT23-6
MAX6723UT_ _D_ -T	-40°C to +85°C	6 SOT23-6
MAX6724UT_ _D_ -T	-40°C to +85°C	6 SOT23-6
MAX6725KA_ _D_ -T	-40°C to +85°C	8 SOT23-8
MAX6726KA_ _D_ -T	-40°C to +85°C	8 SOT23-8
MAX6727KA_ _D_ -T	-40°C to +85°C	8 SOT23-8
MAX6728KA_ _D_ -T	-40°C to +85°C	8 SOT23-8
MAX6729KA_ _D_ -T	-40°C to +85°C	8 SOT23-8

Note: The first “_ _” are placeholders for the threshold voltage levels of the devices. Desired threshold levels are set by the part number suffix found in the Reset Voltage Threshold Suffix Guide. The “_” after the D is a placeholder for the reset timeout delay time. Desired delay time is set using the timeout period suffix found in the Reset Timeout Period Suffix Guide. For example the MAX6716UTLTD3-T is a dual-voltage supervisor $V_{TH1} = 4.625V$, $V_{TH2} = 3.075V$, and 210ms (typ) timeout period.

Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing “-T” with “+T” when ordering.

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Table 1. Reset Voltage Threshold Suffix Guide**

PART NUMBER SUFFIX (_)	V _{CC1} NOMINAL VOLTAGE THRESHOLD (V)	V _{CC2} NOMINAL VOLTAGE THRESHOLD (V)
LT	4.625	3.075
MS	4.375	2.925
MR	4.375	2.625
TZ	3.075	2.313
SY	2.925	2.188
RY	2.625	2.188
TW	3.075	1.665
SV	2.925	1.575
RV	2.625	1.575
TI	3.075	1.388
SH	2.925	1.313
RH	2.625	1.313
TG	3.075	1.110
SF	2.925	1.050
RF	2.625	1.050
TE	3.075	0.833
SD	2.925	0.788
RD	2.625	0.788
ZW	2.313	1.665
YV	2.188	1.575
ZI	2.313	1.388
YH	2.188	1.313
ZG	2.313	1.110
YF	2.188	1.050
ZE	2.313	0.833
YD	2.188	0.788
WI	1.665	1.388
VH	1.575	1.313
WG	1.665	1.110
VF	1.575	1.050
WE	1.665	0.833
VD	1.575	0.788

Standard versions are shown in bold and are available in a D3 timeout option only. Standard versions require 2,500 piece order increments and are typically held in sample stock. There is a 10,000 order increment on nonstandard versions. **Other threshold voltages may be available, contact factory for availability.

Table 2. Reset Timeout Period Suffix Guide


TIMEOUT PERIOD SUFFIX	ACTIVE TIMEOUT PERIOD	
	MIN [ms]	MAX [ms]
D1	1.1	2.2
D2	8.8	17.6
D3	140	280
D5	280	560
D6	560	1120
D4	1120	2240

MAX6715-MAX6729


Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Pin Configurations


TOP VIEW




SOT23




SOT23




SOT23




SOT23




SOT23



SOT23



SOT23




SOT23

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

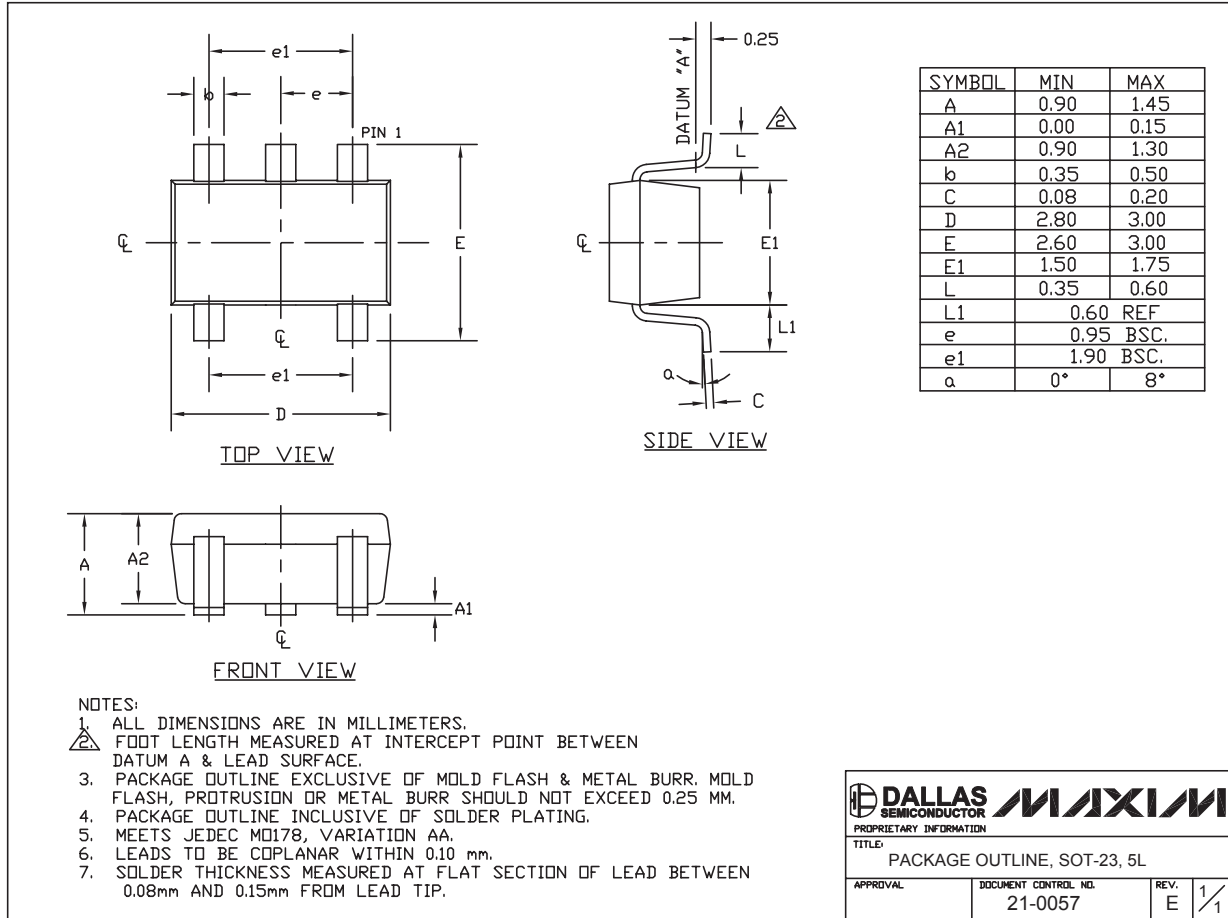


SOT-23 5L .EPS

MAX6715-MAX6729

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

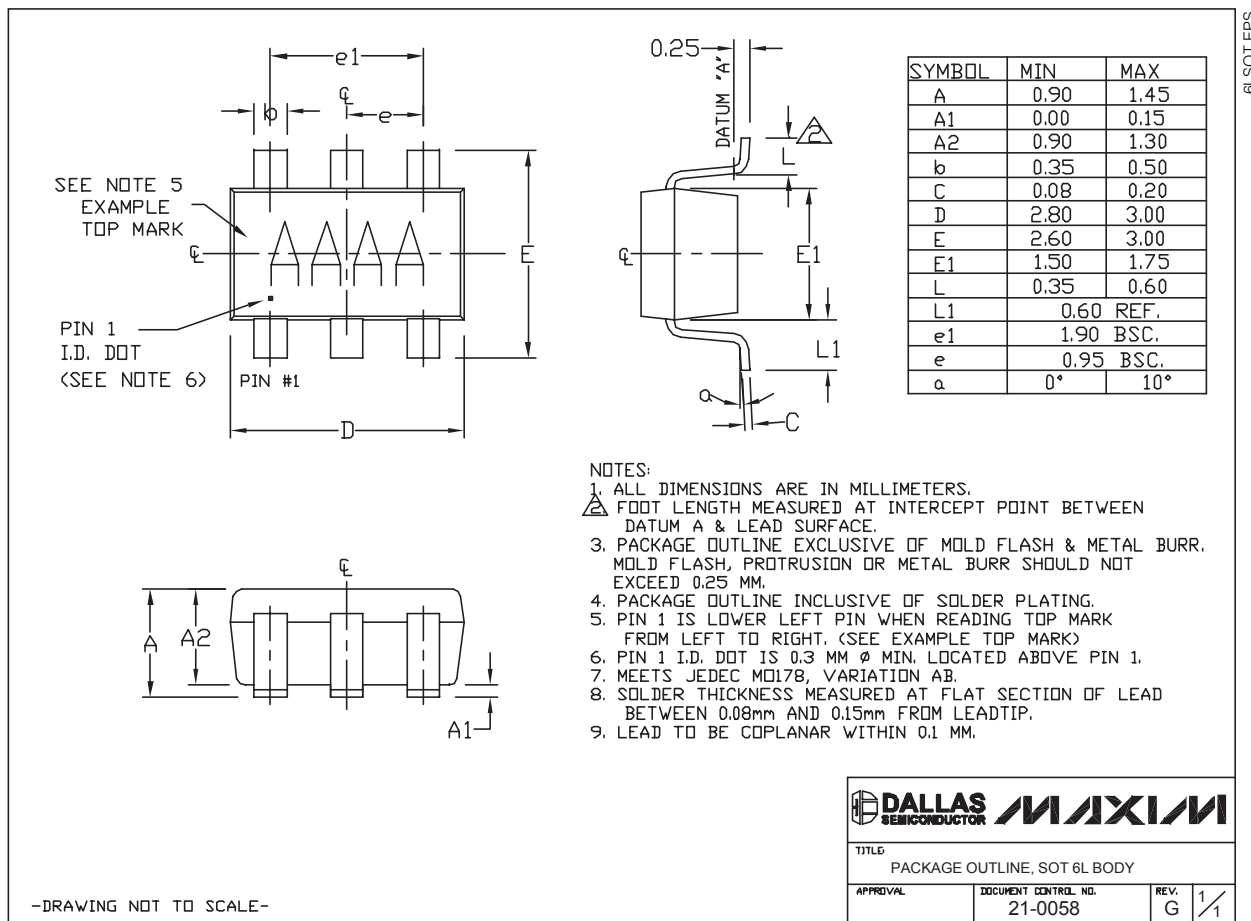


6LSOT1EPS

Dual/Triple Ultra-Low-Voltage SOT23 μ P Supervisory Circuits

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-integrated.com/packages.)

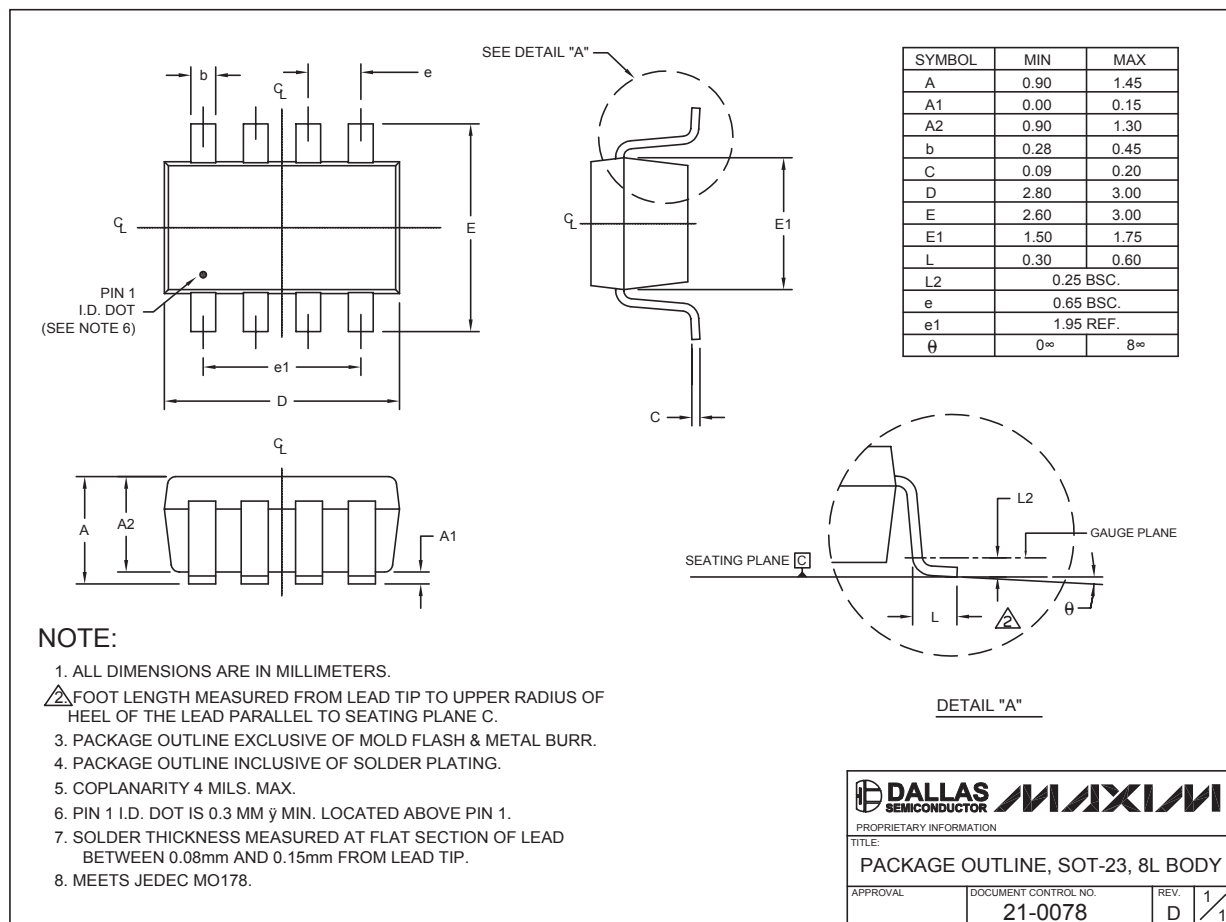

MAX6715-MAX6729

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 19


[WHAT'S NEW](#) [PRODUCTS](#) [SOLUTIONS](#) [DESIGN](#) [APPNOTES](#) [SUPPORT](#) [BUY](#) [COMPANY](#) [MEMBERS](#)

MAX6729

Versions and Part Numbers Available

Part Number	Temperature	Package Code	Package	Pins	Body Size	Package Outline Drawing and Materials Analysis	RoHS/ Lead-Free?	Sample	Buy
MAX6729KALTD1							No		Buy
MAX6729KALTD1-T							No		Buy
MAX6729KALTD2							No		Buy
MAX6729KALTD2-T							No		Buy
MAX6729KALTD3	-40°C to +85°C	K8S-3	SOT-23	8		21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	No	Sample	Buy
MAX6729KALTD3+	-40°C to +85°C	K8S+3	SOT-23	8		21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes	Sample	Buy
MAX6729KALTD3+T	-40°C to +85°C	K8S+3	SOT-23	8		21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes		Buy
MAX6729KALTD3-T	-40°C to +85°C	K8S-3	SOT-23	8		21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	No		Buy
MAX6729KALTD4							No		Buy
MAX6729KALTD4-T							No		Buy
MAX6729KALTD5							No		Buy
MAX6729KALTD5-T							No		Buy
MAX6729KALTD6							No		Buy
MAX6729KALTD6-T							No		Buy
MAX6729KAMRD1							No		Buy
MAX6729KAMRD1-T							No		Buy

MAX6729KAMRD2	No	Buy
MAX6729KAMRD2-T	No	Buy
MAX6729KAMRD3	No	Buy
MAX6729KAMRD3-T	No	Buy
MAX6729KAMRD4	No	Buy
MAX6729KAMRD4-T	No	Buy
MAX6729KAMRD5	No	Buy
MAX6729KAMRD5-T	No	Buy
MAX6729KAMRD6	No	Buy
MAX6729KAMRD6-T	No	Buy
MAX6729KAMSD1	No	Buy
MAX6729KAMSD1-T	No	Buy
MAX6729KAMSD2	No	Buy
MAX6729KAMSD2-T	No	Buy
MAX6729KAMSD3	No	Buy
MAX6729KAMSD3-T	No	Buy
MAX6729KAMSD4	No	Buy
MAX6729KAMSD4-T	No	Buy
MAX6729KAMSD5	No	Buy
MAX6729KAMSD5-T	No	Buy
MAX6729KAMSD6	No	Buy
MAX6729KAMSD6-T	No	Buy
MAX6729KARDD1	No	Buy
MAX6729KARDD1-T	No	Buy
MAX6729KARDD2	No	Buy
MAX6729KARDD2-T	No	Buy
MAX6729KARDD3	No	Buy

MAX6729KARDD3-T	No	Buy
MAX6729KARDD4	No	Buy
MAX6729KARDD4-T	No	Buy
MAX6729KARDD5	No	Buy
MAX6729KARDD5-T	No	Buy
MAX6729KARDD6	No	Buy
MAX6729KARDD6-T	No	Buy
MAX6729KARFD1	No	Buy
MAX6729KARFD1-T	No	Buy
MAX6729KARFD2	No	Buy
MAX6729KARFD2-T	No	Buy
MAX6729KARFD3	No	Buy
MAX6729KARFD3-T	No	Buy
MAX6729KARFD4	No	Buy
MAX6729KARFD4-T	No	Buy
MAX6729KARFD5	No	Buy
MAX6729KARFD5-T	No	Buy
MAX6729KARFD6	No	Buy
MAX6729KARFD6-T	No	Buy
MAX6729KARHD1	No	Buy
MAX6729KARHD1-T	No	Buy
MAX6729KARHD2	No	Buy
MAX6729KARHD2-T	No	Buy
MAX6729KARHD3	No	Buy
MAX6729KARHD3-T	No	Buy
MAX6729KARHD4	No	Buy
MAX6729KARHD4-T	No	Buy

MAX6729KARHD5				No	Buy
MAX6729KARHD5-T				No	Buy
MAX6729KARHD6				No	Buy
MAX6729KARHD6-T				No	Buy
MAX6729KARVD1				No	Buy
MAX6729KARVD1-T				No	Buy
MAX6729KARVD2				No	Buy
MAX6729KARVD2-T				No	Buy
MAX6729KARVD3				No	Sample Buy
MAX6729KARVD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KARVD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KARVD3-T			8		No Buy
MAX6729KARVD4				No	Buy
MAX6729KARVD4-T				No	Buy
MAX6729KARVD5				No	Buy
MAX6729KARVD5-T				No	Buy
MAX6729KARVD6				No	Buy
MAX6729KARVD6-T				No	Buy
MAX6729KARYD1				No	Buy
MAX6729KARYD1-T				No	Buy
MAX6729KARYD2				No	Buy
MAX6729KARYD2-T				No	Buy
MAX6729KARYD3				No	Buy
MAX6729KARYD3-T				No	Buy
MAX6729KARYD4				No	Buy
MAX6729KARYD4-T				No	Buy

MAX6729KARYD5				No	Buy
MAX6729KARYD5-T				No	Buy
MAX6729KARYD6				No	Buy
MAX6729KARYD6-T				No	Buy
MAX6729KASDD1				No	Buy
MAX6729KASDD1-T				No	Buy
MAX6729KASDD2				No	Buy
MAX6729KASDD2-T				No	Buy
MAX6729KASDD3				No	Sample Buy
MAX6729KASDD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KASDD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KASDD3-T			8		No Buy
MAX6729KASDD4				No	Buy
MAX6729KASDD4-T				No	Buy
MAX6729KASDD5				No	Buy
MAX6729KASDD5-T				No	Buy
MAX6729KASDD6				No	Buy
MAX6729KASDD6-T				No	Buy
MAX6729KASFD1				No	Buy
MAX6729KASFD1-T				No	Buy
MAX6729KASFD2				No	Buy
MAX6729KASFD2-T				No	Buy
MAX6729KASFD3				No	Buy
MAX6729KASFD3-T				No	Buy
MAX6729KASFD4				No	Buy
MAX6729KASFD4-T				No	Buy

MAX6729KASFD5				No	Buy
MAX6729KASFD5-T				No	Buy
MAX6729KASFD6				No	Buy
MAX6729KASFD6-T				No	Buy
MAX6729KASHD1				No	Buy
MAX6729KASHD1-T				No	Buy
MAX6729KASHD2				No	Buy
MAX6729KASHD2-T				No	Buy
MAX6729KASHD3				No	Sample Buy
MAX6729KASHD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KASHD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KASHD3-T			8		No Buy
MAX6729KASHD4				No	Buy
MAX6729KASHD4-T				No	Buy
MAX6729KASHD5				No	Buy
MAX6729KASHD5-T				No	Buy
MAX6729KASHD6				No	Buy
MAX6729KASHD6-T				No	Buy
MAX6729KASVD1				No	Buy
MAX6729KASVD1-T				No	Buy
MAX6729KASVD2				No	Buy
MAX6729KASVD2-T				No	Buy
MAX6729KASVD3				No	Sample Buy
MAX6729KASVD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy

MAX6729KASVD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes	Buy
MAX6729KASVD3-T			8		No	Buy
MAX6729KASVD4					No	Buy
MAX6729KASVD4-T					No	Buy
MAX6729KASVD5					No	Buy
MAX6729KASVD5-T					No	Buy
MAX6729KASVD6					No	Buy
MAX6729KASVD6-T					No	Buy
MAX6729KASYD1					No	Buy
MAX6729KASYD1-T					No	Buy
MAX6729KASYD2					No	Buy
MAX6729KASYD2-T					No	Buy
MAX6729KASYD3					No	Sample Buy
MAX6729KASYD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes	Sample Buy
MAX6729KASYD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes	Buy
MAX6729KASYD3-T			8		No	Buy
MAX6729KASYD4					No	Buy
MAX6729KASYD4-T					No	Buy
MAX6729KASYD5					No	Buy
MAX6729KASYD5-T					No	Buy
MAX6729KASYD6					No	Buy
MAX6729KASYD6-T					No	Buy
MAX6729KATED1					No	Buy
MAX6729KATED1-T					No	Buy
MAX6729KATED2					No	Buy

MAX6729KATED2-T					No	Buy
MAX6729KATED3					No	Sample Buy
MAX6729KATED3+	-40°C to +85°C	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KATED3+T	-40°C to +85°C	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KATED3-T				8	No	Buy
MAX6729KATED4					No	Buy
MAX6729KATED4-T					No	Buy
MAX6729KATED5					No	Buy
MAX6729KATED5-T					No	Buy
MAX6729KATED6					No	Buy
MAX6729KATED6-T					No	Buy
MAX6729KATGD1					No	Buy
MAX6729KATGD1-T					No	Buy
MAX6729KATGD2					No	Buy
MAX6729KATGD2-T					No	Buy
MAX6729KATGD3					No	Sample Buy
MAX6729KATGD3+		K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KATGD3+T				8	No	Buy
MAX6729KATGD3-T				8	No	Buy
MAX6729KATGD4					No	Buy
MAX6729KATGD4-T					No	Buy
MAX6729KATGD5					No	Buy
MAX6729KATGD5-T					No	Buy
MAX6729KATGD6					No	Buy
MAX6729KATGD6-T					No	Buy

MAX6729KATID1	No	Buy
MAX6729KATID1-T	No	Buy
MAX6729KATID2	No	Buy
MAX6729KATID2-T	No	Buy
MAX6729KATID3	No	Buy
MAX6729KATID3-T	No	Buy
MAX6729KATID4	No	Buy
MAX6729KATID4-T	No	Buy
MAX6729KATID5	No	Buy
MAX6729KATID5-T	No	Buy
MAX6729KATID6	No	Buy
MAX6729KATID6-T	No	Buy
MAX6729KATWD1	No	Buy
MAX6729KATWD1-T	No	Buy
MAX6729KATWD2	No	Buy
MAX6729KATWD2-T	No	Buy
MAX6729KATWD3	No	Buy
MAX6729KATWD3-T	No	Buy
MAX6729KATWD4	No	Buy
MAX6729KATWD4-T	No	Buy
MAX6729KATWD5	No	Buy
MAX6729KATWD5-T	No	Buy
MAX6729KATWD6	No	Buy
MAX6729KATWD6-T	No	Buy
MAX6729KATZD1	No	Buy
MAX6729KATZD1-T	No	Buy
MAX6729KATZD2	No	Buy

MAX6729KATZD2-T				No	Buy
MAX6729KATZD3				No	Buy
MAX6729KATZD3-T				No	Buy
MAX6729KATZD4				No	Buy
MAX6729KATZD4-T				No	Buy
MAX6729KATZD5				No	Buy
MAX6729KATZD5-T				No	Buy
MAX6729KATZD6				No	Buy
MAX6729KATZD6-T				No	Buy
MAX6729KAVDD1				No	Buy
MAX6729KAVDD1-T				No	Buy
MAX6729KAVDD2				No	Buy
MAX6729KAVDD2-T				No	Buy
MAX6729KAVDD3				No	Sample Buy
MAX6729KAVDD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KAVDD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KAVDD3-T			8		No Buy
MAX6729KAVDD4					No Buy
MAX6729KAVDD4-T					No Buy
MAX6729KAVDD5					No Buy
MAX6729KAVDD5-T					No Buy
MAX6729KAVDD6					No Buy
MAX6729KAVDD6-T					No Buy
MAX6729KAVFD1					No Buy
MAX6729KAVFD1-T					No Buy
MAX6729KAVFD2					No Buy

MAX6729KAVFD2-T				No	Buy
MAX6729KAVFD3				No	Buy
MAX6729KAVFD3-T				No	Buy
MAX6729KAVFD4				No	Buy
MAX6729KAVFD4-T				No	Buy
MAX6729KAVFD5				No	Buy
MAX6729KAVFD5-T				No	Buy
MAX6729KAVFD6				No	Buy
MAX6729KAVFD6-T				No	Buy
MAX6729KAVHD1				No	Buy
MAX6729KAVHD1-T				No	Buy
MAX6729KAVHD2				No	Buy
MAX6729KAVHD2-T				No	Buy
MAX6729KAVHD3				No	Sample Buy
MAX6729KAVHD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KAVHD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KAVHD3-T			8		No Buy
MAX6729KAVHD4				No	Buy
MAX6729KAVHD4-T				No	Buy
MAX6729KAVHD5				No	Buy
MAX6729KAVHD5-T				No	Buy
MAX6729KAVHD6				No	Buy
MAX6729KAVHD6-T				No	Buy
MAX6729KAWED1				No	Buy
MAX6729KAWED1-T				No	Buy
MAX6729KAWED2				No	Buy

MAX6729KAWED2-T				No	Buy
MAX6729KAWED3				No	Buy
MAX6729KAWED3-T				No	Buy
MAX6729KAWED4				No	Buy
MAX6729KAWED4-T				No	Buy
MAX6729KAWED5				No	Buy
MAX6729KAWED5-T				No	Buy
MAX6729KAWED6				No	Buy
MAX6729KAWED6-T				No	Buy
MAX6729KAWGD1				No	Buy
MAX6729KAWGD1-T				No	Buy
MAX6729KAWGD2				No	Buy
MAX6729KAWGD2-T				No	Buy
MAX6729KAWGD3				No	Sample Buy
MAX6729KAWGD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KAWGD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KAWGD3-T			8		No Buy
MAX6729KAWGD4				No	Buy
MAX6729KAWGD4-T				No	Buy
MAX6729KAWGD5				No	Buy
MAX6729KAWGD5-T				No	Buy
MAX6729KAWGD6				No	Buy
MAX6729KAWGD6-T				No	Buy
MAX6729KAWID1				No	Buy
MAX6729KAWID1-T				No	Buy
MAX6729KAWID2				No	Buy

MAX6729KAWID2-T				No	Buy
MAX6729KAWID3				No	Buy
MAX6729KAWID3-T				No	Buy
MAX6729KAWID4				No	Buy
MAX6729KAWID4-T				No	Buy
MAX6729KAWID5				No	Buy
MAX6729KAWID5-T				No	Buy
MAX6729KAWID6				No	Buy
MAX6729KAWID6-T				No	Buy
MAX6729KAYDD1				No	Buy
MAX6729KAYDD1-T				No	Buy
MAX6729KAYDD2				No	Buy
MAX6729KAYDD2-T				No	Buy
MAX6729KAYDD3				No	Sample Buy
MAX6729KAYDD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KAYDD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KAYDD3-T			8		No Buy
MAX6729KAYDD4				No	Buy
MAX6729KAYDD4-T				No	Buy
MAX6729KAYDD5				No	Buy
MAX6729KAYDD5-T				No	Buy
MAX6729KAYDD6				No	Buy
MAX6729KAYDD6-T				No	Buy
MAX6729KAYFD1				No	Buy
MAX6729KAYFD1-T				No	Buy
MAX6729KAYFD2				No	Buy

MAX6729KAYFD2-T			No	Buy
MAX6729KAYFD3			No	Buy
MAX6729KAYFD3-T			No	Buy
MAX6729KAYFD4			No	Buy
MAX6729KAYFD4-T			No	Buy
MAX6729KAYFD5			No	Buy
MAX6729KAYFD5-T			No	Buy
MAX6729KAYFD6			No	Buy
MAX6729KAYFD6-T			No	Buy
MAX6729KAYHD1			No	Buy
MAX6729KAYHD1-T			No	Buy
MAX6729KAYHD2			No	Buy
MAX6729KAYHD2-T			No	Buy
MAX6729KAYHD3			No	Sample Buy
MAX6729KAYHD3+	K8S+3	SOT-23 8	Yes	Sample Buy
				21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis
MAX6729KAYHD3+T		8	No	Buy
MAX6729KAYHD3-T		8	No	Buy
MAX6729KAYHD4			No	Buy
MAX6729KAYHD4-T			No	Buy
MAX6729KAYHD5			No	Buy
MAX6729KAYHD5-T			No	Buy
MAX6729KAYHD6			No	Buy
MAX6729KAYHD6-T			No	Buy
MAX6729KAYVD1			No	Buy
MAX6729KAYVD1-T			No	Buy
MAX6729KAYVD2			No	Buy

MAX6729KAYVD2-T				No	Buy
MAX6729KAYVD3				No	Buy
MAX6729KAYVD3-T				No	Buy
MAX6729KAYVD4				No	Buy
MAX6729KAYVD4-T				No	Buy
MAX6729KAYVD5				No	Buy
MAX6729KAYVD5-T				No	Buy
MAX6729KAYVD6				No	Buy
MAX6729KAYVD6-T				No	Buy
MAX6729KAZED1				No	Buy
MAX6729KAZED1-T				No	Buy
MAX6729KAZED2				No	Buy
MAX6729KAZED2-T				No	Buy
MAX6729KAZED3				No	Sample Buy
MAX6729KAZED3+	-40°C to +85°C	K8S+3	SOT-23 8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KAZED3+T	-40°C to +85°C	K8S+3	SOT-23 8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KAZED3-T			8	No	Buy
MAX6729KAZED4				No	Buy
MAX6729KAZED4-T				No	Buy
MAX6729KAZED5				No	Buy
MAX6729KAZED5-T				No	Buy
MAX6729KAZED6				No	Buy
MAX6729KAZED6-T				No	Buy
MAX6729KAZGD1				No	Buy
MAX6729KAZGD1-T				No	Buy
MAX6729KAZGD2				No	Buy

MAX6729KAZGD2-T				No	Buy
MAX6729KAZGD3				No	Sample Buy
MAX6729KAZGD3+	K8S+3	SOT-23	8	Yes	Sample Buy
					21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis
MAX6729KAZGD3+T	K8S+3	SOT-23	8	Yes	Buy
					21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis
MAX6729KAZGD3-T			8	No	Buy
MAX6729KAZGD4				No	Buy
MAX6729KAZGD4-T				No	Buy
MAX6729KAZGD5				No	Buy
MAX6729KAZGD5-T				No	Buy
MAX6729KAZGD6				No	Buy
MAX6729KAZGD6-T				No	Buy
MAX6729KAZID1				No	Buy
MAX6729KAZID1-T				No	Buy
MAX6729KAZID2				No	Buy
MAX6729KAZID2-T				No	Buy
MAX6729KAZID3				No	Buy
MAX6729KAZID3-T				No	Buy
MAX6729KAZID4				No	Buy
MAX6729KAZID4-T				No	Buy
MAX6729KAZID5				No	Buy
MAX6729KAZID5-T				No	Buy
MAX6729KAZID6				No	Buy
MAX6729KAZID6-T				No	Buy
MAX6729KAZWD1				No	Buy
MAX6729KAZWD1-T				No	Buy
MAX6729KAZWD2				No	Buy

MAX6729KAZWD2-T				No	Buy
MAX6729KAZWD3				No	Sample Buy
MAX6729KAZWD3+	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Sample Buy
MAX6729KAZWD3+T	K8S+3	SOT-23	8	21-0078E (PDF) PKG. OUTLINE, SOT23, 8L Materials Analysis	Yes Buy
MAX6729KAZWD3-T			8		No Buy
MAX6729KAZWD4				No	Buy
MAX6729KAZWD4-T				No	Buy
MAX6729KAZWD5				No	Buy
MAX6729KAZWD5-T				No	Buy
MAX6729KAZWD6				No	Buy
MAX6729KAZWD6-T				No	Buy

See the [MAX6729 QuickView Data Sheet](#) for further information on this product family or download the [MAX6729 full data sheet](#) (PDF, 720k).

Note: **There are often additional part types available which do not appear here.** If you do not see what you need, refer to the "Ordering Information" section of the [MAX6729 full data sheet](#) (PDF, 720k) or see the [Price and Availability](#) section of the website.

Other options and links for purchasing parts are listed at: <http://www.maxim-ic.com/sales>.

[Didn't Find What You Need?](#)



[CONTACT US: FEEDBACK, QUESTIONS](#)



[★ ★ ★ RATE THIS PAGE](#)



[MAIL THIS PAGE](#)

Copyright © 2006 by Maxim Integrated Products • [Legal Notices](#) • [Privacy Policy](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Supervisory Circuits](#) category:

Click to view products by [Maxim](#) manufacturer:

Other Similar products are found below :

[NCP304LSQ38T1G](#) [NCP304LSQ40T1G](#) [NCP304LSQ42T1G](#) [NCP304LSQ43T1G](#) [NCP304LSQ46T1G](#) [NCP305LSQ11T1G](#)
[NCP305LSQ16T1G](#) [NCP305LSQ17T1G](#) [NCP305LSQ18T1G](#) [NCP305LSQ24T1G](#) [NCP305LSQ25T1G](#) [NCP305LSQ29T1G](#)
[NCP305LSQ31T1G](#) [NCP305LSQ32T1G](#) [NCP308MT250TBG](#) [NCP308SN300T1G](#) [NCP391FCALT2G](#) [NCV303LSN42T1G](#)
[NCV308SN330T1G](#) [CAT1161LI-25-G](#) [CAT853STBI-T3](#) [MAX1232CPA](#) [MAX705CPA](#) [CAT1026LI-30-G](#) [CAT1320LI-25-G](#) [CAT872-30ULGT3](#) [LA-ispPAC-POWR1014-01TN48E](#) [NCP304HSQ18T1G](#) [NCP304HSQ29T1G](#) [NCP304LSQ27T1G](#) [NCP304LSQ29T1G](#)
[NCP304LSQ45T1G](#) [NCP305LSQ26T1G](#) [NCP305LSQ35T1G](#) [NCP305LSQ37T1G](#) [NCP308MT300TBG](#) [NCV300LSN36T1G](#)
[NCV302LSN30T1G](#) [NCV303LSN16T1G](#) [NCV303LSN22T1G](#) [NCV303LSN27T1G](#) [NCV33161DMR2G](#) [TC54VN2402EMB713](#)
[MCP1316T-44NE/OT](#) [MCP1316MT-45GE/OT](#) [MCP1316MT-23LI/OT](#) [MCP1316T-26LE/OT](#) [MAX8997EWW+](#) [MAX821RUS+T](#)
[MAX6725AKASYD3-LF-T](#)