

DIN RAIL PULSE/FREQUENCY/CONDITIONER

SEM1600F

- DUAL OR SINGLE UNIVERSAL FREQUENCY INPUT(S) PLUS EXCITATION
- MODES FREQUENCY (0.01 to 65000) Hz ; COUNTER (DC to 1000) Hz
- RATE/TOTALISE, K FACTOR, M FACTOR, MATHS FUNCTIONS
- SECOND INPUT ACTS AS RE-SET IN SINGLE CHANNEL MODE
- VOLT FREE CONTACT TRIP, LATCHED TRIP, PULSE ACTIONS OUTPUT(S)
- ISOLATED OUTPUT CURRENT SINK/SOURCE or BIPOLAR VOLTAGE
- AC/DC POWER SUPPLY



➤ INTRODUCTION

The product is a cost effective smart+ powered conditioner that accepts all common process pulse signals with a frequency range between (0.01 to 65000) Hz in standard configuration and (DC to 1000) Hz in counter mode. Typical applications would be to measure flow or batch counting.

The product has a built in capability to operate as a dual input which allows differential flow / count measurement with advanced maths functions. Or, as a single channel input, with an external reset contact.


When operated in signal channel mode, the discrete input can be programmed to reset the total counter, batch counter or latched relay. The input can also be programmed to control the total counter direction with a combination of count up /count down or halt modes available.

A volt free output contact is provided capable of operating as either a trip, latched trip or pulsed trip. High and low level trip functions are also available.

The output stage offers either voltage, bipolar voltage or active / passive current re-transmission signals. The retransmission signal can be ranged to a scale anywhere within the process range.

The product uses a USB port for configuration, together with a simple to use free menu driven software configuration tool, allowing the user to take advantage of the products comprehensive specification. The device can be configured to operate in three modes:-

- Frequency to process signal mode plus trip
- Advanced frequency mode with K factor, M factor, totalise, rate, maths functions, process signal + trip
- Counter mode with K factor, totalise, maths functions, process signal + trip

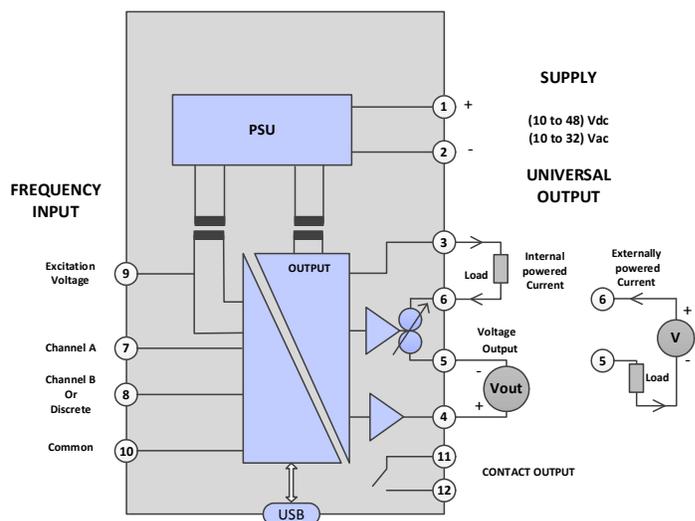

DIN RAIL PULSE/FREQUENCY/CONDITIONER

> PC CONFIGURATION

| | |
|------------------|---|
| EQUIPMENT | |
| COMPUTER | Running Windows XP or later with USB port |
| USB CABLE | A to mini B |

METHOD

Load PC with USB SPEEDLINK software.
Connect SEM1600F USB port to PC USB port using cable.
Run software, set configuration required and save to device.

> SPECIFICATION @ 20 ° C

OPERATION MODES

| | |
|----------------|---|
| Dual Channel | Channel A Frequency Channel B Frequency |
| Single Channel | Channel A frequency Channel B discrete input |

INPUT TYPE

Note channel B offers all input sense option when set in discrete mode. In this mode channel B input value is either high or low.

Frequency Mode

| | |
|---------------------|--------------------|
| Frequency Range | (0.01 to 65000) Hz |
| Min measuring Value | 0.01 Hz |
| Min cut off | 0.01 Hz |
| Min pulse width | 50 μ S |
| Sample Time | 0.1 S or 1 S |

Counter Mode

| | |
|-----------------|-----------------|
| Range | (DC to 1000) Hz |
| Min pulse width | 50 μ S |

Tacho (mV) input

| | |
|--------------|------------------|
| Low trigger | < 100 mV |
| High Trigger | > 200 mV |
| Impedance | > 100 K Ω |
| Over voltage | \pm 50 V |

mA Input

| | |
|--------------|--------------|
| Low trigger | < 1.2 mA |
| High Trigger | > 2.1 mA |
| Impedance | 1 K Ω |

PNP, NPN, Contact

| | |
|--------------|-------------------------|
| Current Max | 16 mA @ 15 V Excitation |
| Current Max | 9 mA @ 8 V Excitation |
| Low trigger | < 1.2 mA |
| High Trigger | > 2.1 mA |
| Impedance | 1 K Ω |

TTL input

| | |
|--------------|----------------|
| Low trigger | < 1.0 V |
| High Trigger | > 2.0 V |
| Impedance | 100 K Ω |

Sensor supply

| | |
|--------|-----------------------------|
| Namur | 8 V dc \pm 1.0 V @ 25 mA |
| Sensor | 15 V dc \pm 1.0 V @ 25 mA |

OUTPUT VOLT FREE CONTACT

| | |
|-----------------------|--|
| Max Voltage | 24 V dc |
| Current | 0.5 A dc |
| Trip Actions | High/Low level trip, High/Low latched trip |
| Frequency Mode Signal | Rate A, Total A, Rate B, Total B, Rate Maths Function, Total Maths Function. |
| Counter Mode Signal | Total A, Total B, Total Maths Function. |
| Pulse output | Period (20 to 10000) mS |
| Frequency Mode Signal | Total A, Total B, Total Maths Function. |
| Counter Mode Signal | Total A, Total B, Total Maths Function. |

ANALOGUE OUTPUT

| | |
|-----------------------|--|
| Output Types | Current /Voltage |
| Frequency Mode Signal | Rate A, Total A, Rate B, Total B, Rate Maths Function, Total Maths Function. |
| Counter Mode Signal | Total A, Total B, Total Maths Function. |

OUTPUT CURRENT

| | |
|---------------------|--|
| Output Types | current sink, source |
| Current sink | Supply voltage (10 to 30) V dc |
| Current source | Max Load 750 R |
| Range | (0 to 20) mA |
| Max Range | 21.5 mA |
| Output Connection | Screw Terminal |
| Accuracy | (mA output /2000) or 5 μ A (Whichever is the greater) |
| Loop Voltage effect | 0.2 μ A / V (Sink Mode) |
| Thermal drift | 1 μ A / °C |

OUTPUT VOLTAGE

| | |
|-------------------|----------------------------|
| Voltage output | Max Load current 5 mA |
| Range | (0 to 10) V, (-10 to 10) V |
| Max Range | 10.5 V |
| Output Connection | Screw Terminal |
| Accuracy | \pm 5 mV |

ISOLATION

| | |
|------------|----------|
| Three port | 500 V dc |
|------------|----------|

GENERAL SPECIFICATION

| | |
|-----------------------------|--|
| Update time | 100 mS |
| Response Time | 200 mS |
| Start up time | 4 seconds (Output start up condition lags) |
| Warm-up time | 1 minute to full accuracy |
| Active Scaling | Allows scaling of output against active input, Using USB port |
| Ambient storage temperature | (-20 to +70) °C |
| Ambient humidity range | (10 to 90) % RH non condensing |

SUPPLY

| | |
|------------|--|
| Range | (10 to 48) V dc (10 to 32) V rms ac |
| Power | < 1 W @ full output current |
| Protection | Internal resettable fuse (0.5 A) + Over Voltage protection. |

APPROVALS

| | |
|-------------------|--|
| EMC - BS EN 61326 | Electrical equipment for measurement control and laboratory use. |
|-------------------|--|

Note - Signal input wires to be less than 30 metres to comply.
NPN inputs require external 2 K Ω pull up resistor.

DIN RAIL PULSE/FREQUENCY/CONDITIONER

➤ CONFIGURATION


DUAL CHANNEL FREQUENCY MODE

| | |
|-------------------------------------|--|
| Sensor Excitation | 8 V or 15 V dc |
| Channel A Channel B | |
| Sensor | |
| Type | TTL, mA, PNP, NPN, Contact, mV |
| Sample Time | 100 mS or 1 second |
| Cut Low | (0.01 to 50000) Hz |
| Cut High | (5.0 to 65000) Hz |
| Preset | Sensor override user set signal |
| Rate | |
| Rate Low | Scale process low to frequency |
| Rate High | Scale process high to frequency |
| K factor | Range 0.0001 to 100000.0 |
| M factor | 15 correction points |
| Total | |
| Total direction | Count up, count down or halted |
| Total time base | Second, Minute, Hour |
| Total factor | (1 to 1000000) |
| Total Divisor | (1 to 100000) |
| Total Range | ±10000000.000 |
| Total Variables | Start, Reset-up, Reset-Down |
| COMMON | |
| Rate Units | 6 Characters |
| Total units | 6 Characters |
| Tag Number | 8 Characters |
| FUNCTIONS | |
| Rate | A + B, A - B, Highest, Lowest Total A + B, A - B, Highest, Lowest |
| CONTACT | |
| Trip (Normally open) | |
| Action | High/low level trip, High/low level latched trip |
| Source | RateA, RateB, TotalA, TotalB, Rate Maths Function or Total Maths Function. |
| Hysteresis | (1 to 100000) units |
| Latch Reset | USB reset or power down |
| Pulse output (normally open) | |
| Source | TotalA or TotalB, Total Maths Function |
| Pulse period | (20 to 10000) mS |
| Batch counter | Advance on pulse |
| Batch Reset | 1 to 100000000 |
| ANALOGUE PROCESS OUTPUTS | |
| Source | RateA, TotalA, RateB, TotalB, Rate Maths Function or Total Maths Function |
| Low, High Range | Within working range |
| OUTPUT SIGNAL | |
| Type | mA, Volts, ± Volts |
| Low Scale | Any within O/P Range |
| High Scale | Any within O/P Range |
| LIVE PROCESS DATA READ, LOG | |
| Channel A | Hz, Rate, Total |
| Channel B | Hz, Rate, Total |
| Functions | Rate Maths Function, Total Maths Function |
| Batch Counter | Batch Total |
| Logger Type | desktop file *.txt format |
| Logger Period | (0.04 to 30) Minutes |
| Time Stamp | Each reading (log only) |
| LIVE COMMANDS | |
| Individual Resets | Total A, Total B, Batch |
| Master Reset | Total A, Total B, Batch |
| Relay | Reset Latched Relay |


SINGLE CHANNEL FREQUENCY MODE

| | |
|-------------------------------------|---|
| Sensor Excitation | 8 V or 15 V dc |
| Channel A | |
| Sensor | |
| Type | TTL, mA, PNP, NPN, Contact, mV |
| Sample Time | 100mS or 1 second |
| Cut Low | (0.00 to 50000) Hz |
| Cut High | (5.0 to 65000) Hz |
| Rate | |
| Rate Low | Scale process low to frequency |
| Rate High | Scale process high to frequency |
| K factor | Range 0.0001 to 100000.0 |
| M factor | 15 correction points |
| Total | |
| Total direction | Count up or count down |
| Total time base | Second, Minute, Hour |
| Total factor | (1 to 1000000) |
| Total Divisor | (1 to 100000) |
| Total Range | ±10000000.000 |
| Total Variables | Start, Reset-up, Reset-Down |
| Channel B | |
| Sensor | |
| Type | TTL, mA, PNP, NPN, Contact, mV |
| Active | Contact open (input High) or Contact Closed (low input) |
| Action | Reset Total A, Reset Total B Reset Relay. Counter control, Off, Up/Halt, down/halt or up/down. |
| COMMON | |
| Rate Units | 6 Characters |
| Tag Number | 8 Characters |
| CONTACT | |
| Trip (Normally open) | |
| Action | High/low level trip, High/low level latched trip |
| Source | RateA, TotalA, (1 to 100000) units |
| Hysteresis | USB reset or power down or discrete |
| Latch Reset | |
| Pulse output (normally open) | |
| Source | TotalA |
| Pulse period | (20 to 10000) mS |
| Batch counter | Advance on pulse |
| Batch Reset | 1 to 100000000 |
| ANALOGUE PROCESS OUTPUTS | |
| Source | RateA, TotalA, Total Maths Function |
| Low Range | Within working range |
| High Range | Within working range |
| OUTPUT SIGNAL | |
| Type | mA, Volts, ± Volts |
| Low Scale | Any within O/P Range |
| High Scale | Any within O/P Range |
| LIVE PROCESS DATA READ, LOG | |
| Channel A | Hz, Rate, Total |
| Channel B | 0 or 1 (1 = active) |
| Batch Counter | Batch Total |
| Logger Type | Save to desktop file *.txt format |
| Logger period | (0.04 to 30) Minutes |
| Time Stamp | Each reading (log only) |
| LIVE COMMANDS | |
| Individual Resets | Total A, Batch |
| Master Reset | Total A, Batch |
| Relay | Reset Latched Relay |

DIN RAIL PULSE/FREQUENCY/CONDITIONER

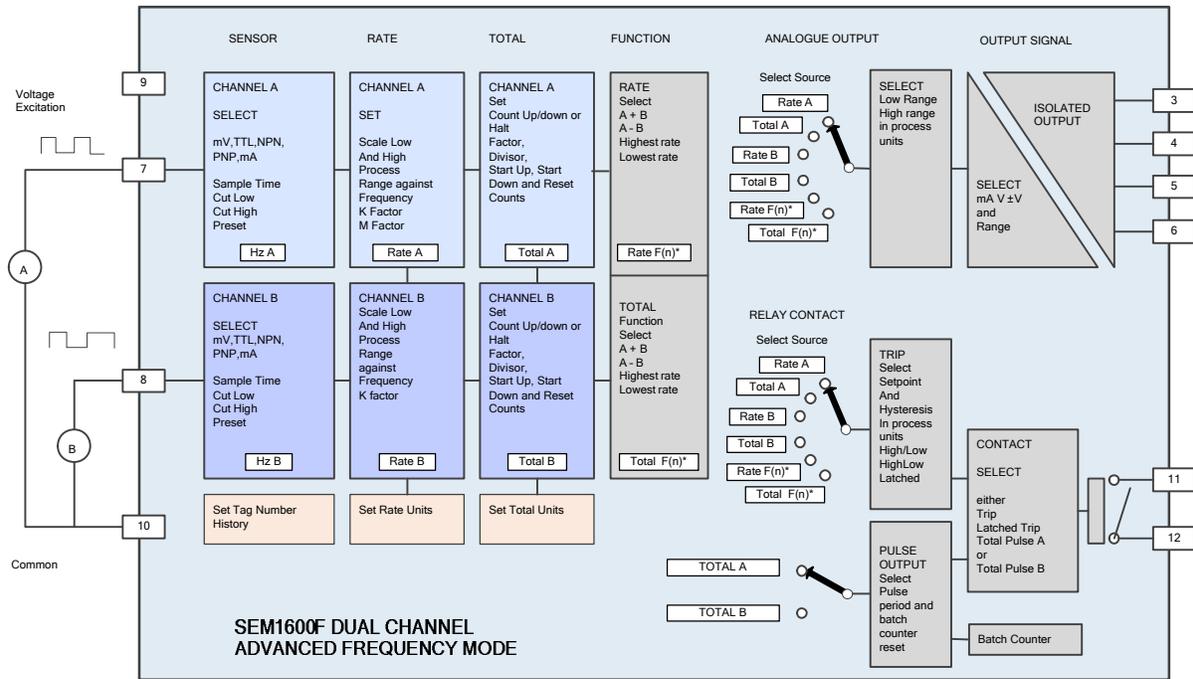

F(n) * = Maths Function

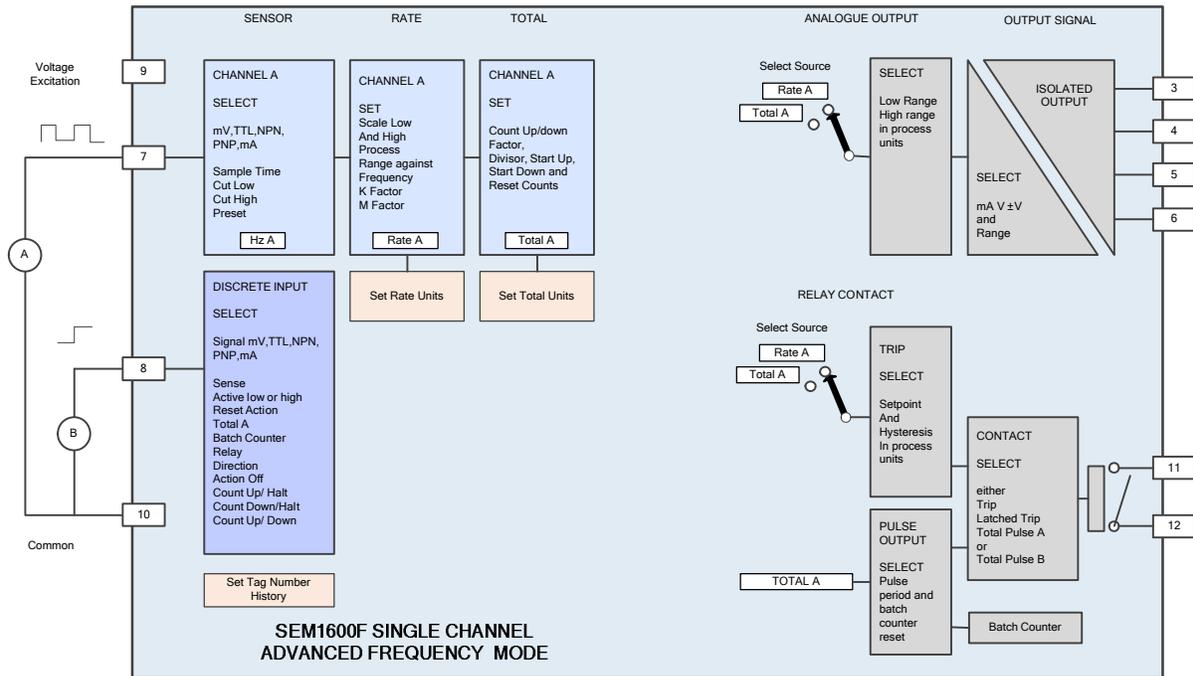

DIN RAIL PULSE/FREQUENCY/CONDITIONER


DUAL CHANNEL COUNTER MODE

| | |
|-------------------------------------|--|
| Sensor Excitation | 8 V or 15 V dc |
| Channel A Channel B | |
| Sensor Type | TTL, mA, PNP, NPN, Contact, mV |
| Total | |
| Total direction | Count up, count down or halted |
| K factor | range 0.001 to 10000 |
| Total Range | ±10000000.000 |
| Total Variables | Start, Reset-up, Reset-Down |
| Max pulse rate | 50 pulses per second |
| COMMON | |
| Total units | 6 Characters |
| Tag Number | 8 Characters |
| FUNCTIONS | |
| Total | A + B, A - B, Highest, Lowest |
| CONTACT Trip (Normally open) | |
| Action | High/low level trip, High/low level latched trip |
| Source | TotalA, TotalB, or Total Maths Function. |
| Hysteresis | (1 to 100000) units |
| Latch Reset | USB reset or power down |
| Pulse output (normally open) | |
| Source | TotalA or TotalB Total Maths Function |
| Pulse period | (20 to 10000) mS |
| Batch counter | Advance on pulse |
| Batch Reset | 1 to 100000000 |
| ANALOGUE PROCESS OUTPUTS | |
| Source | TotalA, TotalB, Total Maths Function |
| Low, High Range | Within working range |
| OUTPUT SIGNAL | |
| Type | mA, Volts, ± Volts |
| Low Scale | Any within O/P Range |
| High Scale | Any within O/P Range |
| LIVE PROCESS DATA READ, LOG | |
| Channel A | Total |
| Channel B | Total |
| Functions | Total Maths Function |
| Batch Counter | Batch Total |
| Logger Type | desktop file *.txt format |
| Logger period | (0.04 to 30) Minutes |
| Time Stamp | Each reading (log only) |
| LIVE COMMANDS | |
| Individual Resets | Total A, Total B, Batch |
| Master Reset | Total A, Total B, Batch |
| Relay | Reset Latched Relay |


SINGLE CHANNEL COUNTER MODE

| | |
|-------------------------------------|---|
| Sensor Excitation | 8 V or 15 V dc |
| Channel A Sensor Type | |
| | TTL, mA, PNP, NPN, Contact, mV |
| Total | |
| Total direction | Count up, count down or halted |
| K factor | range 0.001 to 10000 |
| Total Range | ±1000000000000000 |
| Total Variables | Start, Reset-up, Reset-Down |
| Max pulse rate | 50 pulses per second |
| Channel B Sensor Type | |
| | TTL, mA, PNP, NPN, Contact, mV |
| Active | Contact open (input High) or Contact Closed (low input) |
| Action | Reset Total A, Reset Total B Reset Relay. |
| | Counter control, Off, Up/Halt, down/halt or up/down. |
| COMMON | |
| Rate Units | 6 Characters |
| Tag Number | 8 Characters |
| CONTACT Trip (Normally open) | |
| Action | High/low level trip, High/low level latched trip |
| Source | RateA, TotalA, |
| Hysteresis | (1 to 100000) units |
| Latch Reset | USB reset or power down or discrete |
| Pulse output (normally open) | |
| Source | TotalA |
| Pulse period | (20 to 10000) mS |
| Batch counter | Advance on pulse |
| Batch Reset | 1 to 1000000000 |
| ANALOGUE PROCESS OUTPUTS | |
| Source | RateA, TotalA, Total Maths Function |
| Low Range | Within working range |
| High Range | Within working range |
| OUTPUT SIGNAL | |
| Type | mA, Volts, ± Volts |
| Low Scale | Any within O/P Range |
| High Scale | Any within O/P Range |
| LIVE PROCESS DATA READ, LOG | |
| Channel A | Total |
| Channel B | 0 or 1 (1 = active) |
| Batch Counter | Batch Total |
| Logger Type | Save to desktop file *.txt format |
| Logger period | (0.04 to 30) Minutes |
| Time Stamp | Each reading (log only) |
| LIVE COMMANDS | |
| Individual Resets | Total A, Batch |
| Master Reset | Total A, Batch |
| Relay | Reset Latched Relay |

DIN RAIL PULSE/FREQUENCY/CONDITIONER

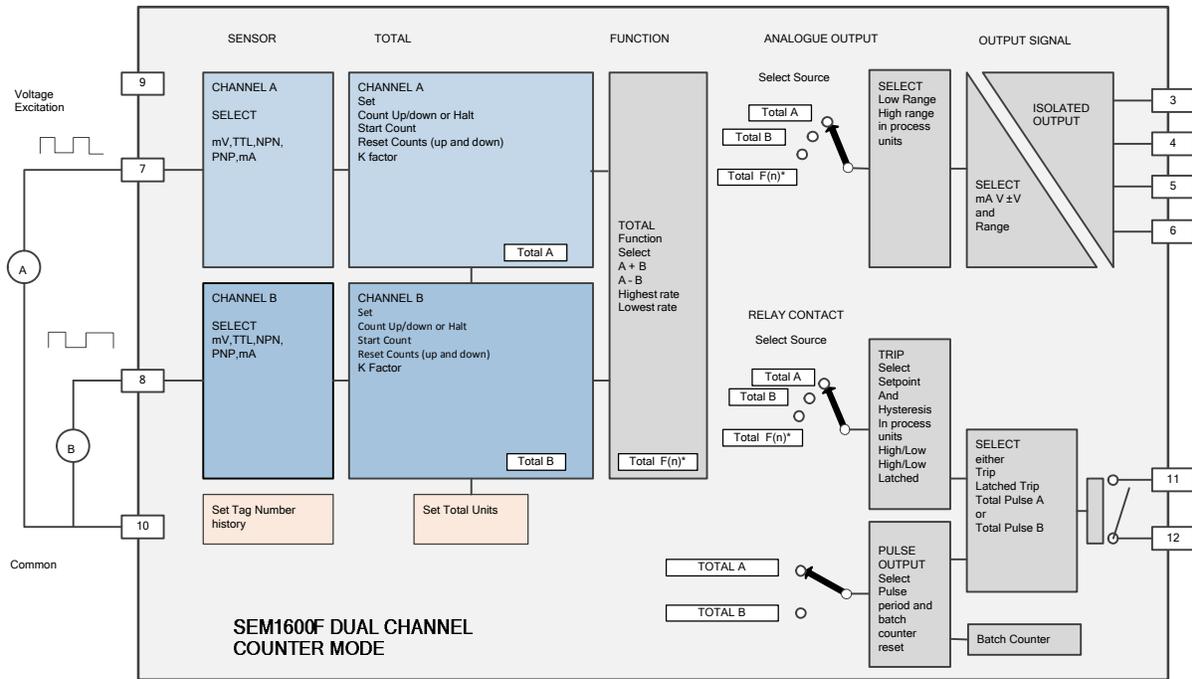


F(n) * = Maths Function

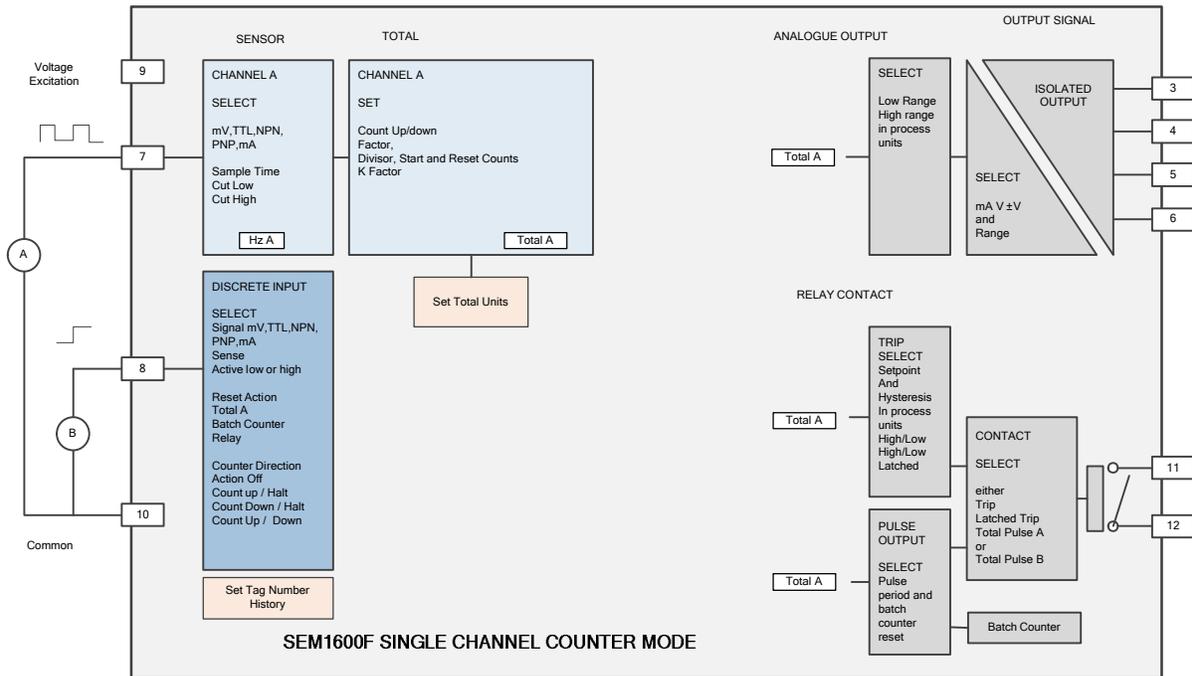

PRESSURE TRANSMITTER

> MECHANICAL

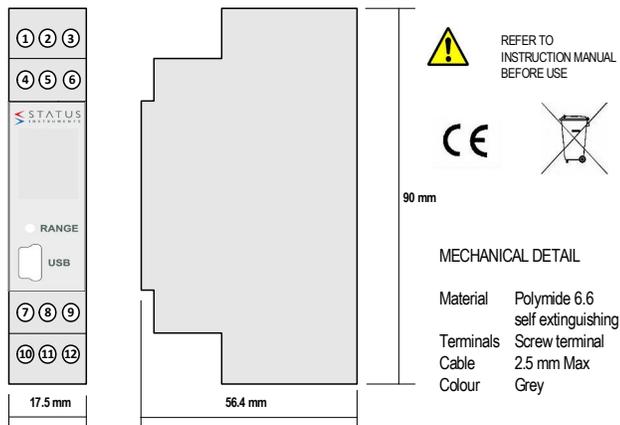

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminal Block Interface Modules](#) category:

Click to view products by [Status manufacturer](#):

Other Similar products are found below :

[73-551-6002I](#) [GCN1MX25B](#) [11S](#) [DIN-50P-01](#) [DIN-68H-01](#) [DIN-96DI-01](#) [2291901](#) [2900185](#) [2903392](#) [2907794](#) [2M10FCL](#) [2281759](#)
[2906249](#) [2907808](#) [TB ML 3P ST D5.08](#) [5604442](#) [XW2B-40G5-T](#) [5606629](#) [XW2B-20G5-D](#) [2903870](#) [5541988](#) [5541962](#) [1776613-1](#) [XW2B-](#)
[34G4](#) [XW2B-60G5](#) [XW2R-E34G-C1](#) [XW2R-E34G-C3](#) [XW2R-J40G-T](#) [XW2R-P34G-C4](#) [XW2B-50G5](#) [XW2R-E40G-T](#) [XW2R-E34G-C2](#)
[XW2R-J34G-C2](#) [ADAM-3920R-AE](#) [060-6827-06](#) [2311030](#) [2287708](#) [XW2C-20G6-IO16](#) [XW2R-J20G-T](#) [XW2B-60G4](#) [GCN1-T](#)
[00111550102](#) [2908853](#) [2908851](#) [2908852](#) [2908850](#) [1033201](#) [5541234](#) [410-261](#) [5521322](#)