



Micro Modules

(Substrates with Built-in ICs, Products Utilizing with SESUB)

Bluetooth® V4.1 Smart (Low Energy) Single Mode Module

SESUB-PAN-D14580

Micro Modules


(Substrates with Built-in ICs, Products Utilizing with SESUB)

Bluetooth® V4.1 Smart (Low Energy) Single Mode Module


Overview of SESUB-PAN-D14580

FEATURES



- Ultra small package - Ideal for for wearable devices
- Space saving Ultra small package 3.5 x 3.5 x 1.0mm (TYP)
- Packaged in 36 pin solder bumped BGA with 0.5mm pitch
- Compatible with Bluetooth® Smart Ready products
- ARM Cortex-M0 32bit high performance microcontroller
- 32kB OTP programmable memory, 84kB ROM for BT stack
- 42kB System SRAM, 8kB Retention SRAM
- Including IC (Dialog Semiconductor : DA14580), Crystal (16MHz), Inductor, and Capacitor in this module.

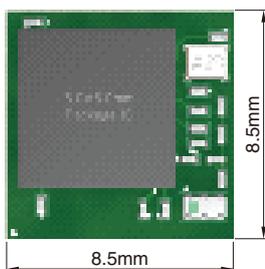

Discrete Solution
72.3mm²

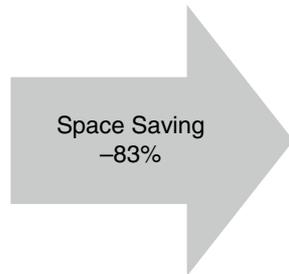

* Production Part is over molded




0.5mm pitch
Solder Bumped BGA
36pins

SESUB-PAN-D14580
12.3mm²

APPLICATION



- Healthcare/sports & fitness equipment
(Example: Activity mass meter, thermometer, sphygmomanometer, blood oximeter, blood glucose meter, heart rate meter, biometrics)
- Wearable devices
(Example: Wristband, watch, ring, glasses, shoes, hat, shirt)
- Home entertainment equipment
(Example: Remote control, sensor tag, toys, lighting products)
- PC peripheral applications
(Example: Mouse, key board, stylus, presentation pointer)

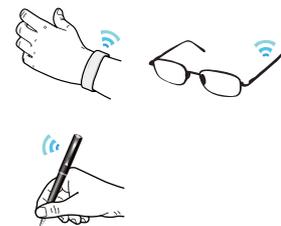

- Bluetooth® and Bluetooth® Low Energy are the standards established by Bluetooth Special Interest Group (SIG).

SESUB-PAN-D14580

SHAPE & DIMENSIONS

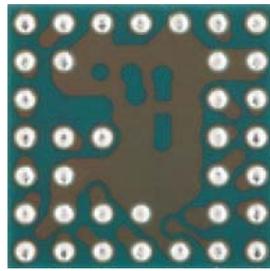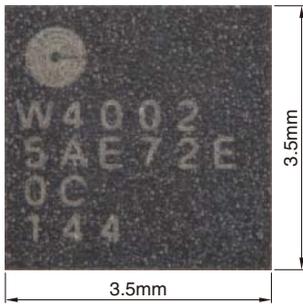

0.5mm pitch
Solder Bumped BGA
36pins

* Production Part is over molded


ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE


Communication standard	2.4GHz Bluetooth® V4.1 Low Energy
Transmitter output power level	0dBm (typ)
Receiver sensitivity level	-94dBm
Host Interface	UART (2ch) / SPI+ / I2C (100k/400kHz)
Peripheral Interface	10bits ADC (4ch) / Pin-configurable GPIO
Current consumption	5.0mA (Tx), 5.4mA (Rx), 0.8μA (Deep Sleep mode)

RF CHARACTERISTICS

Frequency vs. TX Power

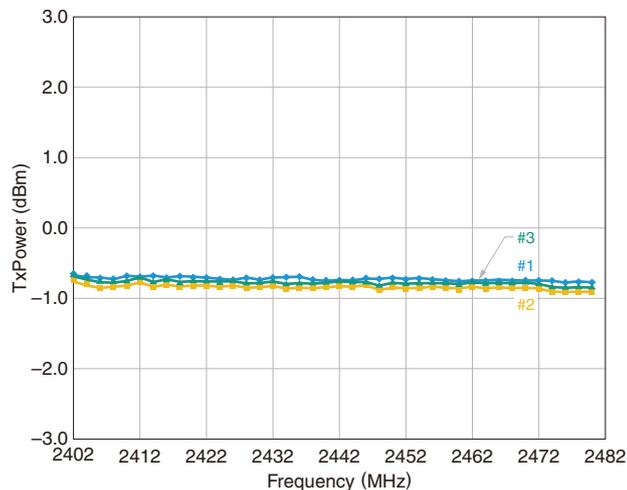


Frequency vs. Sensitivity

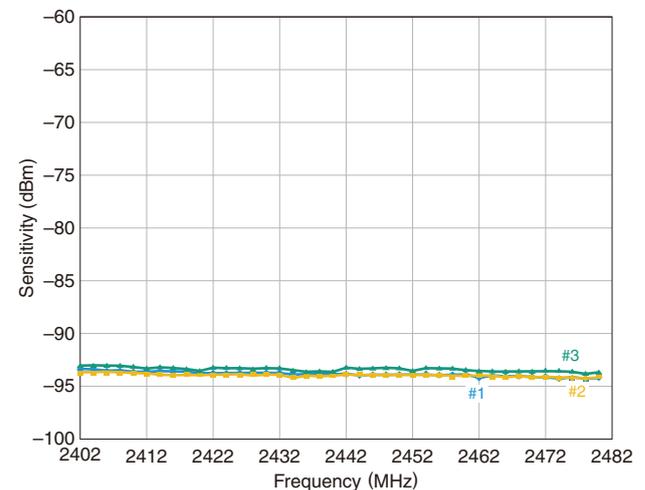

SESUB-PAN-D14580

■ SESUB-PAN-D14580 EVALUATION BOARD [SP14817]

- TDK's SP14817, Daughter board is ready to connect with Dialog Semiconductor's evaluation mother board. This allows for quick designs by utilizing Dialog's -software development tools and development materials

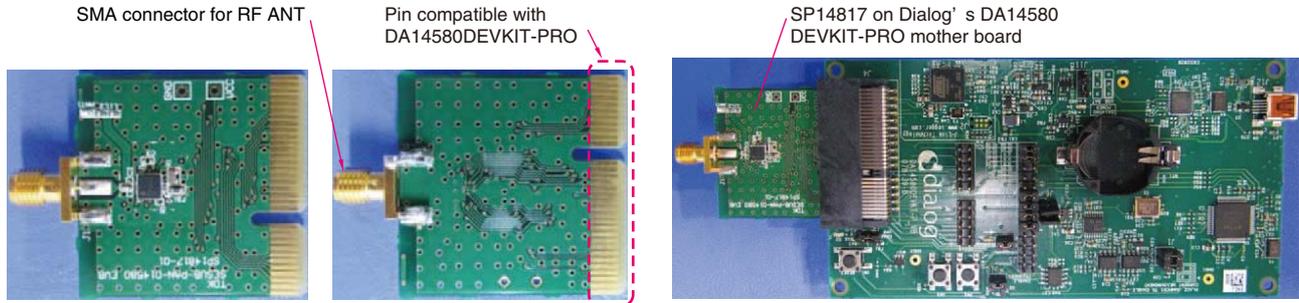

■ SESUB-PAN-D14580 EVALUATION KIT [SESUB-PAN-D14580EVK]

- Regulatory certified evaluation module [SP14808] with integrated 128kB Serial Flash ROM for reprogramming during development. Evaluation Module is ideal for immediate software development.



■ ORDERING INFORMATION

Ordering Code	Contents	MOQ	Remark
SESUB-PAN-D14580		1000pcs	
SP14817		1pc	Evaluation board for RF characteristics.
SESUB-PAN-D14580 EVK	SP14808	1pc	SESUB-PAN-D14580 Evaluation Module with ANT Certified Japanese & FCC Radio Certification
	SP14809	1pc	Adapter Board for SP14808.
SP14808		1pc	For the customer who wants to have spare units.
SP14808 ST		1set	SP14808ST contains 5 pcs of SP14808 in a set. Volume discount.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bluetooth Development Tools \(802.15.1\)](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[ENW89819AZKF](#) [CYBLE-212020-EVAL](#) [DVK-BT860-SA](#) [DVK-BT850-SA](#) [DVK-MSD50NBT](#) [SP14808ST](#) [DVK-BL600-SA-07](#) [DVK-BT860-ST](#) [DVK-BT850-ST](#) [MBH7BLZ02-EF-KIT](#) [CYBLE-014008-PROG](#) [FWM7BLZ20-EB-KIT](#) [SP14801-DUT](#) [ATSAMB11ZR-XPRO](#)
[EBWT11u](#) [SLWRB4306B](#) [SKY66111-21EK1](#) [QN9020DKUL](#) [CYBT-213043-EVAL](#) [QPK-NRF5X-01](#) [3026](#) [2267](#) [2479](#) [2487](#)
[DA14580DONGLE](#) [2633](#) [2995](#) [BMD-301-EVAL](#) [EBSHCNZWZ](#) [EBSHJNZWZ](#) [EKSHCNZWZ](#) [EKSHJNZWZ](#) [R41Z-TA-EVAL](#)
[CY8CKIT-062-BLE](#) [CYBLE-013025-EVAL](#) [CYBLE-214015-EVAL](#) [CYW920706WCDEVAL](#) [STEVAL-BLUEMIC-1](#) [STEVAL-](#)
[IDB007V1M](#) [EBSGJNAWY-WX](#) [EBSGCNAWY-WX](#) [AC320032-3](#) [ENW-89847AWKF](#) [UGWZ3AA001A](#) [STEVAL-IDB007V2](#) [CYBLE-](#)
[212006-EVAL](#) [DVK-BT800-02](#) [EBSHCNZXZ](#) [WSM-BL241-ADA-008DK](#) [SLWRB4303A](#)