


NPN SWITCHING TRANSISTOR

MMBT3904

FEATURES

- Epitaxial planar die construction.
- Complementary PNP type available (MMBT3906).
- Collector Current Capability $I_{CM}=200\text{mA}$.
- Collector-emitter Voltage $V_{CEO}=40\text{V}$.
- MSL 1

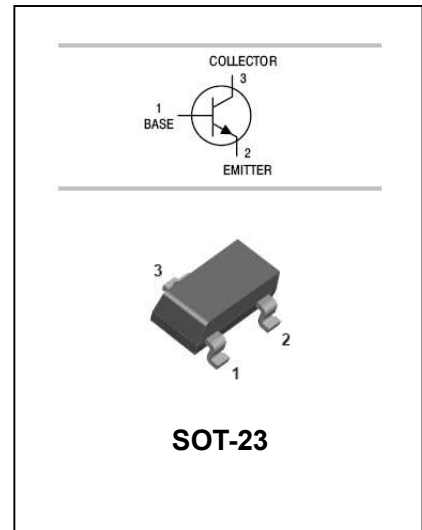

APPLICATIONS

- General switching and amplification

ORDERING INFORMATION

Type No.	Marking	Package Code
MMBT3904□	1AM	SOT-23

□: none is for Lead Free package;

“G” is for Halogen Free package.

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	Value	UNIT
V_{CBO}	collector-base voltage	open emitter	60	V
V_{CEO}	collector-emitter voltage	open base	40	V
V_{EBO}	emitter-base voltage	open collector	6	V
I_C	collector current (DC)		200	mA
I_{CM}	peak collector current		200	mA
I_{BM}	peak base current		100	mA
P_{tot}	total power dissipation	$T_{amb} \leq 25^\circ\text{C}$	250	mW
T_{stg}	storage temperature		-65 to +150	$^\circ\text{C}$
T_j	junction temperature		150	$^\circ\text{C}$

NPN SWITCHING TRANSISTOR

MMBT3904

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified


SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0; V_{CB} = 30\text{ V}$	-	50	nA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = 6\text{ V}$	-	50	nA
h_{FE}	DC current gain	$V_{CE} = 1\text{ V};$ $I_C = 0.1\text{ mA}$ $I_C = 1\text{ mA}$ $I_C = 10\text{ mA}$ $I_C = 50\text{ mA}$ $I_C = 100\text{ mA}$	60 80 100 60 30	- - 300 - -	
$V_{CE(sat)}$	collector-emitter saturation voltage	$I_C = 10\text{ mA}; I_B = 1\text{ mA}$	-	200	mV
		$I_C = 50\text{ mA}; I_B = 5\text{ mA}$	-	300	mV
$V_{BE(sat)}$	base-emitter saturation voltage	$I_C = 10\text{ mA}; I_B = 1\text{ mA}$	650	850	mV
		$I_C = 50\text{ mA}; I_B = 5\text{ mA}$	-	950	mV
C_{obo}	Output Capacitance	$I_E = I_C = 0; V_{CB} = 5\text{ V};$ $f = 1\text{ MHz}$	-	4	pF
C_{ibo}	Input Capacitance	$I_C = I_E = 0; V_{BE} = 500\text{ mV};$ $f = 1\text{ MHz}$	-	8	pF
f_T	transition frequency	$I_C = 10\text{ mA}; V_{CE} = 20\text{ V};$ $f = 100\text{ MHz}$	300	-	MHz
F	noise figure	$I_C = 100\text{ mA}; V_{CE} = 5\text{ V};$ $R_S = 1\text{ k}\Omega; f = 10\text{ Hz to } 15.7\text{ kHz}$	-	5	dB
Switching times (between 10% and 90% levels);					
t_d	delay time	$V_{CC} = 3\text{ Vdc}, V_{BE} = -0.5\text{ Vdc}$	-	35	ns
t_r	rise time	$I_C = 10\text{ mA}, I_{B1} = 1\text{ mA}$	-	35	ns
t_s	storage time	$V_{CC} = 3\text{ Vdc}, I_C = 10\text{ mA}$	-	200	ns
t_f	fall time	$I_{B1} = I_{B2} = 1\text{ mA}$	-	50	ns

Note Pulse test: $t_p \leq 300\text{ ms}; d \leq 0.02$.


NPN SWITCHING TRANSISTOR

MMBT3904


TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

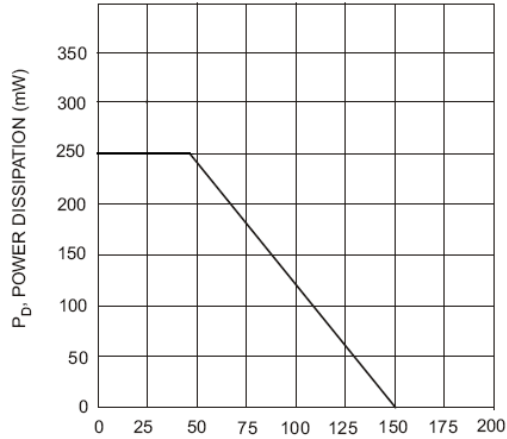


T_A , AMBIENT TEMPERATURE ($^\circ\text{C}$)
Fig. 1, Max Power Dissipation vs Ambient Temperature

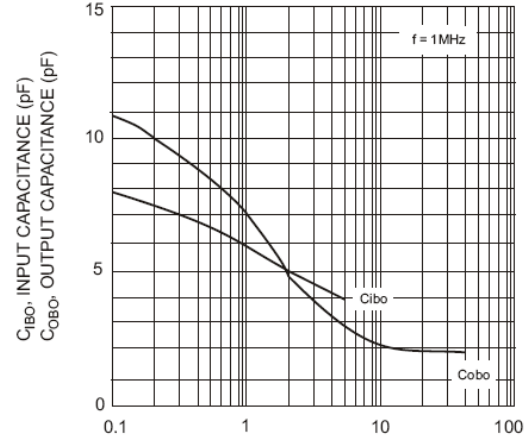


V_{CB} , COLLECTOR-BASE VOLTAGE (V)
Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

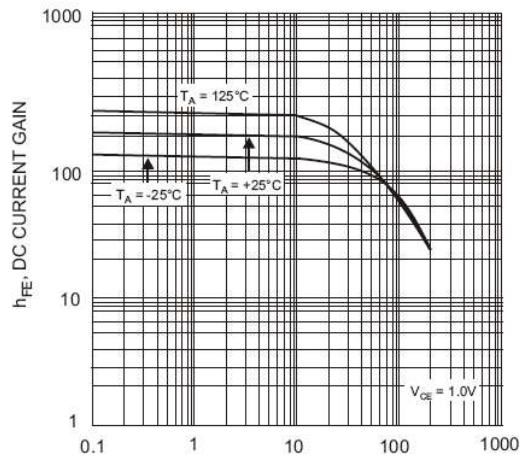

I_C , COLLECTOR CURRENT (mA)
Fig. 3, Typical DC Current Gain vs Collector Current

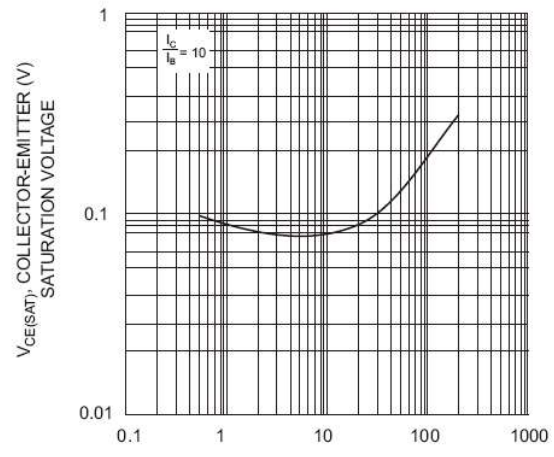

I_C , COLLECTOR CURRENT (mA)
Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

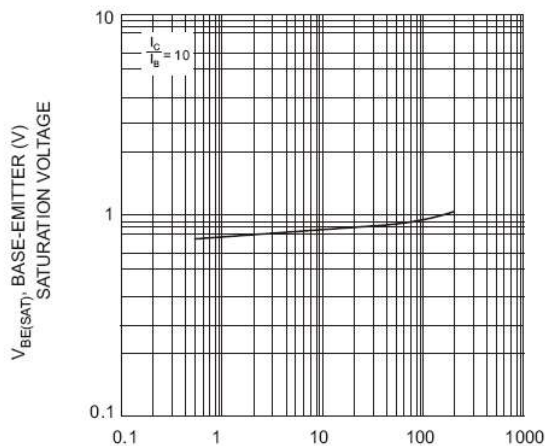

I_C , COLLECTOR CURRENT (mA)
Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current


NPN SWITCHING TRANSISTOR

MMBT3904


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

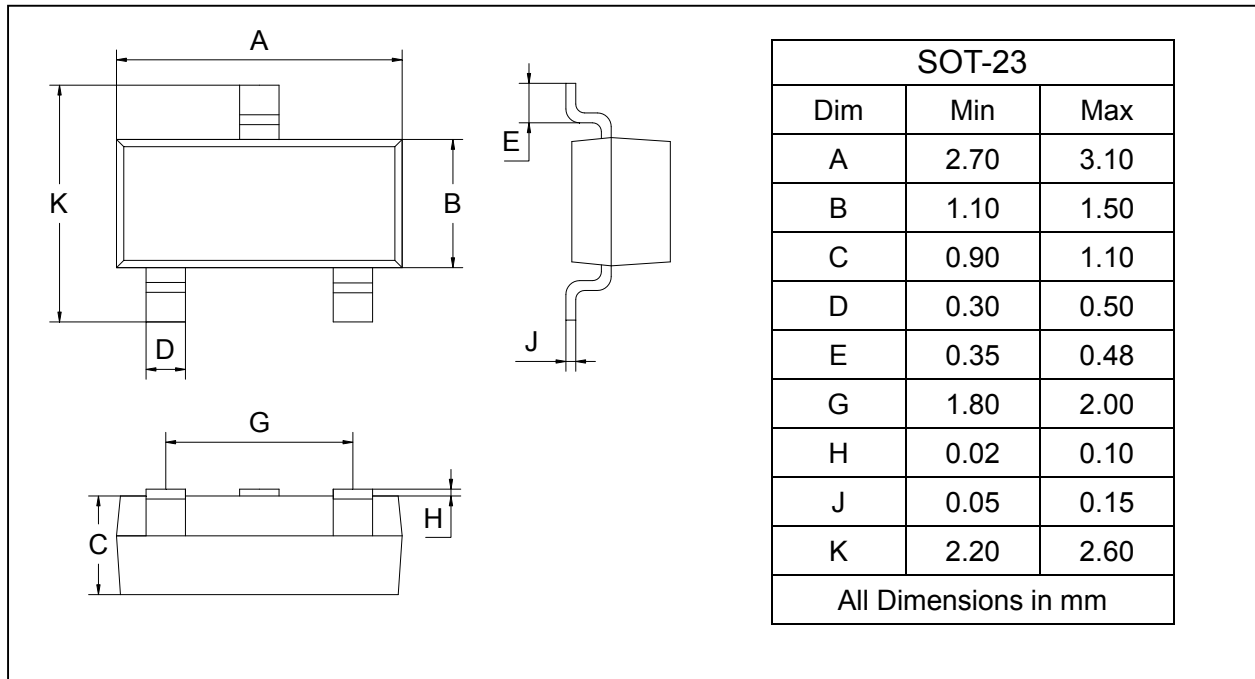

SOLDERING FOOTPRINT

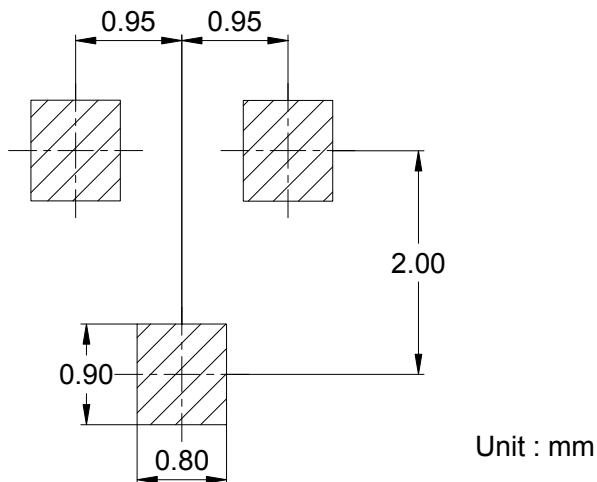

PACKAGE INFORMATION

Device	Package	Shipping
MMBT3904	SOT-23	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT](#) ***category:***

Click to view products by [Galaxy](#) ***manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)