

RED INDICATES ORIGINAL

TABLE 1

DASH NO.	FIG. NO.	CABLES ACCOMMODATED	A DIM	B DIM	C FLATS	D FLATS	ASSEMBLE PER
-1	1,3	RG-58 ESSEX 621-715	.096	1.274	.438	.500	TAI-101
-2		RG-59					
-2A		BELDEN 8279					
-2B		AT&T 730A					
-3		RG-223					
-3A		RG-55					
-4		RG-122 BELDEN 8218					
-5		RG-174 RG-187					
-5A		RG-196					
-5B		HEWLETT-PACKARD 8120-1107					
-6	1	BELDEN 9231	.130	1.336	.625	.688	TAI-120
-6A		RG-8					
-6B		RG-11					
-6B		RG-9					
-6E		RG-5					
-6E		RG-6					
-21		RG-303					
-22		RG-180					
-31		GRUMMAN GC875GPI RG-187 DBL SHLD					
-34		BELDEN 8228					
-36	1,3	MICRODOT 275-3991 AMPEX 616-569	.096	1.274	.438	.500	TAI-101
-37		RAYCHEM 810					
-41		RG-304 BELDEN 9248					
-44		BRAND-REX B749 GORE C06C032					
-48		BELDEN 9880					
-50		BELDEN 89880					
-086		RG-405				.250	
-141		RG-402				.313	

TABLE 2

INCH	MM
.005	0.13
.030	0.76
.094	2.39
.096	2.44
.125	3.18
.130	3.30
.250	6.35
.313	7.95
.438	11.13
.500	12.70
.625	15.88
.688	17.48
.828	21.03
1.274	32.36
1.336	33.93
1.846	46.89

FIG 1
-1 SHOWN

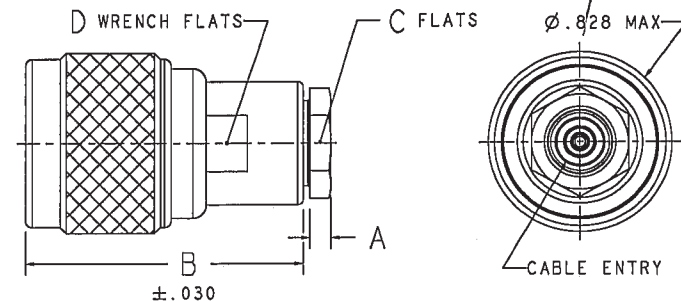


FIG 2
-141 SHOWN

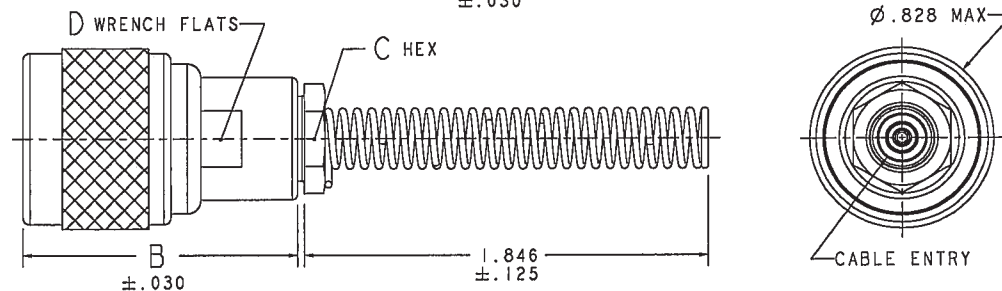
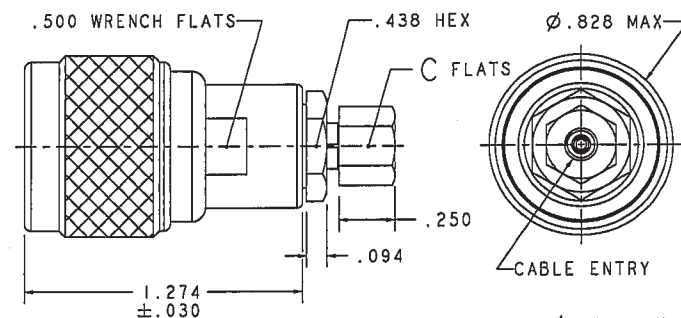


FIG 3
-1 SHOWN

△ IF BEND RELIEF SPRING REQUIRED, (SEE FIG 3)
ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH
CABLE GROUPS -6, -6A, -6B, -6E, -48, -50, -086, -141)

4. TYPE 'N' COAXIAL CABLE PLUG, 50 & 75 OHM VERSIONS

3. EXAMPLE OF COMPLETE MODEL NO.:

PL95 = 50 OHM
PL95S = 50 OHM W/SAFETY WIRE HOLES
UPL95 = 75 OHM
UPL95S = 75 OHM W/SAFETY WIRE HOLES

UPL95-2 BR

BEND RELIEF SPRING
(OPTIONAL △)

CABLE GROUP NUMBER

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR PROCUREMENT OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION.

REVISIONS			I-0370 SH 1	
REV	ECO NO.	DESCRIPTION	DWN	APPROVED
V	12266	PICTORIALLY REORIENTED DIELECTRICS ON SH.2; SEE ECO	JCM	WM/393

QTY	DESCRIPTION		PART NUMBER		ITEM
TOL UNLESS SPECIFIED	TROMPETER RF connectivity		PL95/UPL95/ PL95S/UPL95S		
DWG	JCM	2-24-98	MATERIAL	CODE IDENT	DRAWING NO.
CHK	WM	3-2-98		14949	I-0370
ENGR			SCALE 5/2	DATE 11-25-74	SHEET 1C
NEXT ASSY	APPR	3-3-98			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) ***category:***

Click to view products by [Bel Fuse](#) ***manufacturer:***

Other Similar products are found below :

[6002-7051-003](#) [6059674-1](#) [630059-000](#) [M55339/15-00491](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#)
[7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7405-1521-005](#) [7405-1521-019](#) [7405-1521-802](#) [755-74-5](#) [7706-2](#) [873183](#)
[PL375-33](#) [95-850-148-3](#) [R107003010W](#) [R112186000](#) [R113082097](#) [R113236000](#) [R113240097](#) [R114083000](#) [R114670000W](#) [R121053000](#)
[R124072220W](#) [R124076450](#) [R124175123](#) [R125075001](#) [R125414001](#) [R125415030](#) [R125415271](#) [R141007161](#) [R141574161W](#)
[R142004000W](#) [R142076000W](#) [R142076161W](#) [R142184000W](#) [R142676700](#) [R143012000](#) [R143075000W](#) [R143089117](#) [R143235161W](#)
[R143292700](#) [R143557000](#) [R161008000](#)