

承認書

SPECIFICATION FOR APPROVAL

客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION

CT2-22.5x12.7x13.8

編號
SERIAL NO.

NO. CF1026132163

日期
DATE

2023年6月12日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
趙 利勤	李 新义	王 传军
DATE: 2023/6/12		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司

DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

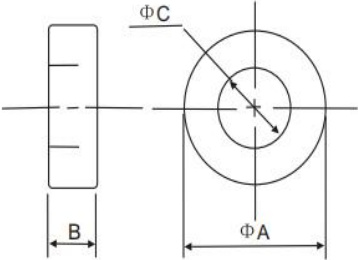
联系方式

王小姐: 13556646144

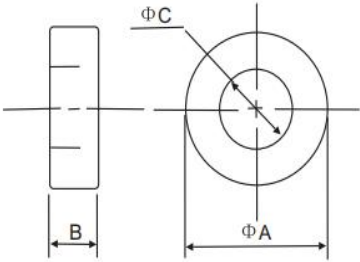

洪先生: 13809826886

承 認 書

SPECIFICATION FOR APPROVAL

規 格 ITEM	CT2-22.5x12.7x13.8		編 號 SERIAL NO.		NO. CF1026132163	
1. 形狀尺寸（單位mm）； SHAPE & DIMENSION(unit/mm); 			A	22.50 ± 0.5	mm	
			B	12.70 ± 0.5	mm	
			C	13.80 ± 0.5	mm	
			D			
			E			
			F			
			G			
2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;						
☐ L		TEST FREQ		測試儀器 TESTING INSTRUMENTS		
☐ Q		TEST FREQ	KHZ MHZ	1. Q-METER: ☐ HP-4342A ☐ MQ-172		
☒ Z	Z1=30 Ω MIN KHZ 25MHZ	Z3=	KHZ MHZ	2. LCR-METER: ☐ TH2826		
	Z2=80 Ω MIN KHZ 100MHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: ☒ HP-4191A ☐ Agilent 16092A ☐ TH2826		
溫 度 TEMP	25±5℃	濕 度 HUMIDITY	60±8%	4. L-METER: ☐ TH-2775B		
繞 線: WINDING	Z: Φ 0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A		
3. 外 观 THE LIMIT OF BREAKAGE:						
項 目 Item			標準值 Standard Value			
一處缺陷的面积 Area of a breakage			≤1mm ²			
总缺陷面积 ALL area of the breakage			≤2mm ²			
缺陷深度 The depth of the breakge			≤0.4mm			
毛刺长度 The length of burr			≤0.2mm			
4. 包 裝 PACKAGING:						
內包裝采用泡塑盒，外包裝采用紙箱，每箱產品外面都蓋上标签（包括品名、數量、批號、檢驗員）。 Inner packing gdopts foam plastics box,outer packing adopts carton and each carton should have a qualified label outside(include the variey,quantity,batch number and inspector).						

檢 測 數 據
INSPECTION DATA

規 格 ITEM		CT2-22.5x12.7x13.8				編 號 SERIAL NO.		NO. CF1026132163					
1. 形狀尺寸(单位/毫米): SHAPE & DIMENSION(unit:mm): = 						☐ L							
						☐ Q				KHZ MHZ			
						☒ Z		Z1=30 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
								Z2=80 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
						溫 度 TEMP		25±5℃		濕 度 HUMIDITY		60±8%	
						绕 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)						
	Q	L (μ H)	Z1 (Ω)	Z2 (Ω)	Z3 (Ω)	Z4 (Ω)	A	B	C	D	E	F	
			30	80			22.5	12.7	13.8				
+			/	/			0.5	0.5	0.5				
—			0	0			0.5	0.5	0.5				
1			46.8	126.4			22.48	12.74	13.83				
2			46.3	119.1			22.41	12.71	13.84				
3			46.2	126.8			22.54	12.75	13.81				
4			46.6	126.2			22.45	12.87	13.87				
5			46.6	128.8			22.41	12.70	13.79				
6			46.8	127.2			22.59	12.88	13.76				
7			46.2	129.4			22.55	12.73	13.87				
8			46.9	126.9			22.59	12.76	13.87				
9			46.8	124.4			22.54	12.79	13.79				
10			46.8	139.7			22.52	12.84	13.80				
X			46.6	127.5			22.51	12.78	13.82				
Y/N			Y	Y			Y	Y	Y				
2. 測試儀器 TESTING INSTRUMENTS HP 4191A 						檢 測 INSPECTION		復 核 CHECK		确 認 APPROVAL			
						赵 利勤		李 新义		王 传军			

IMPEDANCE V.S.FREQUENCY (Z-Y)

The graph shows the impedance of a series RLC circuit as a function of frequency. The x-axis represents Frequency in MHz, ranging from 1 to 1000 on a logarithmic scale. The y-axis represents Impedance in Ω , ranging from 1 to 1000 on a logarithmic scale. The curve starts at approximately 4 Ω at 1 MHz, rises to a peak of about 800 Ω at 450 MHz, and then decreases to about 150 Ω at 1000 MHz.

© CF2024 版

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [canfeng](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [0098.0094](#) [0098.9206](#) [59781-6](#) [0098.9212](#) [618-00001](#) [6292-1](#) [6-306105-9](#) [690432-1](#) [699161-000](#) [700989](#) [7230-3](#) [72609-02 CAPTIVE JACK SCREW](#) [73542-02 CAPTIVE SHORT THUMBSCREW](#) [809704-1](#) [8700](#) [8860220](#) [992763-3](#) [A168P1](#) [1-24921-1](#) [125416-1](#) [1301810313](#) [1-306131-6](#) [1301830042](#) [1458](#) [18029-4](#) [NBDSCREW](#) [NUT-16-3P-HEX-NICKEL](#) [20993.45098](#) [21004-1](#) [21009-4](#) [21014-5](#) [21021-2](#) [CA24037A01](#) [22987-4](#) [2327](#) [240632-1](#) [240632-2](#) [89506-9801](#) [2504](#) [9031](#) [9-1393249-2](#) [26-0048PP](#) [27210-1](#) [27210-8](#) [9318](#) [9520](#) [29300](#) [#2x3/8 SCREW](#) [3000-07](#)