

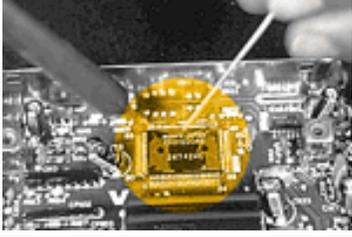
SMD Removal Kit (Chip Quik® Alloy 2.5ft, flux, alcohol pads) leaded

Product Highlights

Easily remove SMD parts with Chip Quik® removal alloy
 Reduce heat and reduce damage to circuit boards and SMD parts during removal
 Comes with SMD291 flux

Specifications

Alloy:	Chip Quik®
Flux Type:	No-Clean
Flux Classification:	RELO
Melting Point:	58°C (136°F)

Chip Quik® Instructions		
	1	Apply Chip Quik flux to all leads of SMD with syringe or flux applicator.
	2	Melt Chip Quik low temperature alloy uniformly on all pins of SMD. Maintain alloy in molten state long enough for complete reflow.
	3	Lift chip from board with dental pick or vacuum pen.
	4	Thoroughly clean site with swab dipped in flux while applying heat. Clean thoroughly with alcohol pad.

SMD Removal

(With solder iron or warm air bath)

- Apply flux to all leads.
- Melt CHIP QUIK® uniformly on all pins.
- Maintain alloy in molten state long enough to release chip.
- Lift chip from board with dental pick or vacuum pen.

CLEAN UP

- While molten, use cotton swab and flux to move excess to an unused section of board.
- While applying heat, polish each pad with a swab and flux until thoroughly clean.
- At room temperature, clean residue with alcohol pad.
- You are now ready to install the new chip.

2.5 ft of Chip Quik® material, removes 1250 to 1500 SMD pins.

Conforms to the following Industry Standards:

J-STD-006C, Amendments 1 & 2 (Solder Alloys and Fluxed/Non-Fluxed Solders):

Yes

RoHS 2 Directive 2011/65/EU:

No

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desoldering Braid / Solder Removal](#) category:

Click to view products by [Chip Quik](#) manufacturer:

Other Similar products are found below :

[532505-2](#) [DS03-910-5](#) [T0054487199](#) [T0054486999](#) [DP-CC](#) [STDC-102](#) [T0054465499N](#) [T0058741815N](#) [T0054465299N](#) [T0051320399N](#)
[T0051351199](#) [4036S](#) [6961](#) [9057](#) [9970](#) [9976](#) [DS104](#) [DS115T](#) [DS117T](#) [DS204](#) [DS206](#) [DS60](#) [ETBB](#) [HE80](#) [MP135](#) [MP136](#) [MP137](#) [MP138](#)
[MT6](#) [UTC234](#) [T0054460273](#) [T0053411299N](#) [17538](#) [S1069](#) [1811-5F](#) [1824-5F](#) [1813-5F](#) [1833-10F](#) [1810-25F](#) [1823-25F](#) [1824-25F](#) [0320705](#)
[0320800](#) [0320903](#) [0321200](#) [0321300](#) [0321500](#) [10-50L](#) [40-4-10](#) [51314400](#)