

**SERIES:** VIBLSD1-SIP | **DESCRIPTION:** DC-DC CONVERTER
**FEATURES**


- 1 W isolated output
- industry standard 4 pin SIP package
- single regulated outputs
- 1,000 Vdc isolation
- wide temperature (-40~85°C)
- efficiency up to 75%



MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple <sup>1</sup> max (mVp-p)	noise <sup>1</sup> max (mVp-p)	efficiency typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)				
VIBLSD1-S5-S5-SIP	5	4.75~5.25	5	20	200	1	20	75	67
VIBLSD1-S5-S9-SIP*	5	4.75~5.25	9	12	111	1	20	75	70
VIBLSD1-S5-S12-SIP	5	4.75~5.25	12	9	83	1	20	75	71
VIBLSD1-S5-S15-SIP	5	4.75~5.25	15	7	67	1	20	75	73
VIBLSD1-S5-S24-SIP*	5	4.75~5.25	24	5	42	1	20	75	68
VIBLSD1-S12-S5-SIP	12	11.4~12.6	5	20	200	1	20	75	67
VIBLSD1-S12-S9-SIP	12	11.4~12.6	9	12	111	1	20	75	72
VIBLSD1-S12-S12-SIP	12	11.4~12.6	12	9	83	1	20	75	70
VIBLSD1-S12-S15-SIP	12	11.4~12.6	15	7	67	1	20	75	74
VIBLSD1-S12-S24-SIP	12	11.4~12.6	24	5	42	1	20	75	68
VIBLSD1-S15-S5-SIP*	15	14.25~15.75	5	20	200	1	20	75	67
VIBLSD1-S15-S9-SIP*	15	14.25~15.75	9	12	111	1	20	75	71
VIBLSD1-S15-S12-SIP*	15	14.25~15.75	12	9	83	1	20	75	71
VIBLSD1-S15-S15-SIP*	15	14.25~15.75	15	7	67	1	20	75	72
VIBLSD1-S15-S24-SIP*	15	14.25~15.75	24	5	42	1	20	75	68
VIBLSD1-S24-S5-SIP	24	22.8~25.2	5	20	200	1	20	75	68
VIBLSD1-S24-S9-SIP	24	22.8~25.2	9	12	111	1	20	75	68
VIBLSD1-S24-S12-SIP	24	22.8~25.2	12	9	83	1	20	75	73
VIBLSD1-S24-S15-SIP	24	22.8~25.2	15	7	67	1	20	75	75
VIBLSD1-S24-S24-SIP	24	22.8~25.2	24	5	42	1	20	75	68

Notes: 1. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1  $\mu$ F ceramic and 10  $\mu$ F electrolytic capacitors on the output.  
 \*. Discontinued model

## PART NUMBER KEY

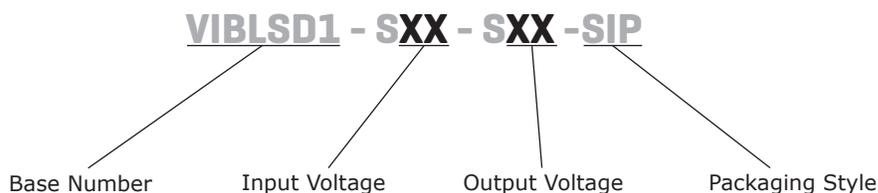

## INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	5 Vdc models	4.75	5	5.25	Vdc
	12 Vdc models	11.4	12	12.6	Vdc
	15 Vdc models	14.25	15	15.75	Vdc
	24 Vdc models	22.8	24	25.2	Vdc

## OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	for Vin change of 5%			±0.25	%
load regulation	measured from 10% load to full load			±2	%
voltage accuracy				±3	%
switching frequency	100% load, input voltage range		120	300	kHz
temperature coefficient			±0.03		%/°C

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	5 and 24 Vdc output models all other models: continuous			1	s


## SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	for 1 minute at 1 mA max.	1,000			Vdc
isolation resistance	at 500 Vdc	1,000			MΩ
MTBF	as per MIL-HDBK-217F @ 25°C	3,500,000			hours
RoHS	2011/65/EU				

## ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		85	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%
temperature rise	at full load		15	25	°C
hand soldering	1.5 mm from case for 10 seconds			300	°C

## DERATING CURVES

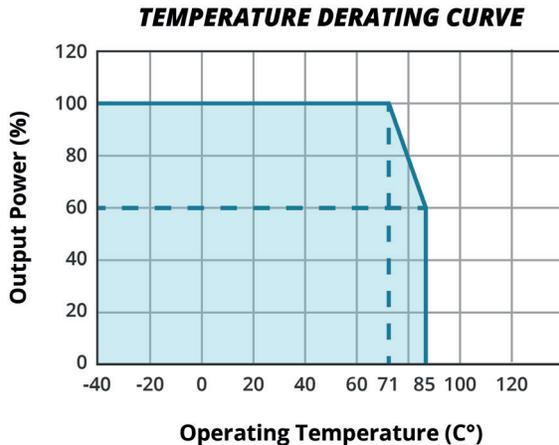




## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	19.60 x 6.00 x 10.00 (0.772 x 0.236 x 0.394 inch)				mm
case material	plastic (UL94-V0)				
weight			2.1		g

## MECHANICAL DRAWING

units: mm [inches]  
 tolerance: ±0.25 [±0.010]  
 pin section tolerance: ±0.10 mm [±0.004]

PIN CONNECTIONS	
PIN	FUNCTION
1	+Vin
2	GND
4	0V
6	+Vo

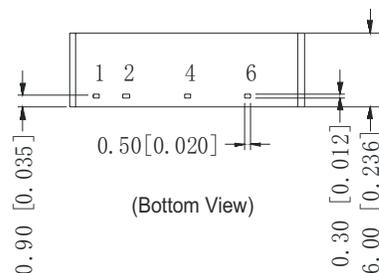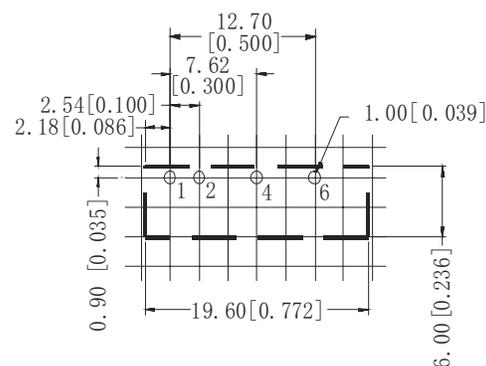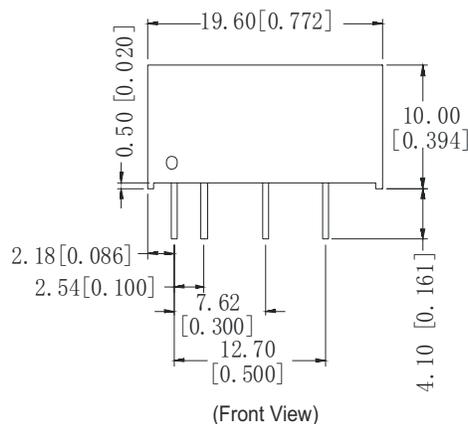

## APPLICATION NOTES

### 1. Requirement on Output Load

In order to ensure the product operates efficiently and reliably, make sure the specified range of input voltage is not exceeded and the minimum output load is not less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading.

### 2. Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

### 3. Filtering

In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees the external capacitor table. To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (Figure 1).

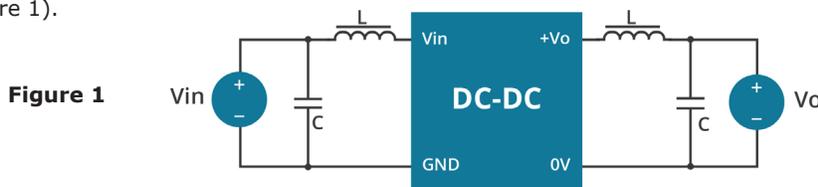


Figure 1

### 4. Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

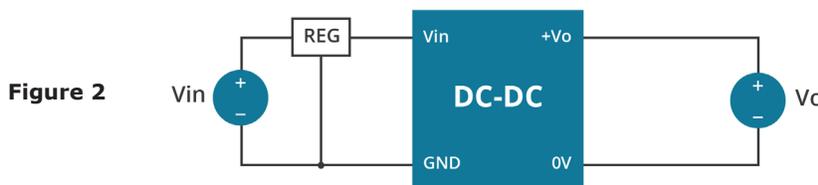


Figure 2

### 5. External Capacitor Table

It is not recommended to connect any external capacitor in the application field with less than 0.5 W output.

Table 1

Vin (Vdc)	Cin (μF)	Vout (Vdc)	Cout (μF)
5	4.7	5	10
12	4.7	9	4.7
15	2.2	12	2.2
24	1	15	1
--	--	24	0.47

Notes: 1. Operation under minimum load will not damage the converter; however, they may not meet all specifications listed.  
 2. Max. capacitive load tested at input voltage range and full load.  
 3. All specifications measured at: Ta=25°C, humidity<75%, nominal input voltage and rated output load, unless otherwise specified.

## REVISION HISTORY

rev.	description	date
1.0	initial release	12/09/2005
1.01	new template applied, V-Infinity branding removed, 0.75 watt, 15 Vdc input & 24 Vdc output models added	09/06/2012
1.02	removed UL marking from datasheet	01/10/2013
1.03	updated spec	07/11/2013
1.04	updated spec	02/09/2015
1.05	discontinued VIBLSD1-S15-S12-SIP, VIBLSD1-S15-S15-SIP, VIBLSD1-S15-S24-SIP, VIBLSD1-S15-S5-SIP, VIBLSD1-S15-S9-SIP, VIBLSD1-S5-S9-SIP models	06/24/2019
1.06	discontinued VIBLSD1-S5-S24-SIP	02/01/2021
1.07	application circuits updated	06/29/2021

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**  
a bel group

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [CUI Inc](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)