



USB TO DIGI XBEE®  
WIRELESS PAN ADAPTER  
FOR LAPTOPS & PCS



# XSTICK®

The XStick provides local connectivity to a wireless Digi XBee network from a laptop or PC, enabling local commissioning of the network and its devices

Digi's XStick is an easy-to-use USB to Digi XBee Wireless Personal Area Network (WPAN) adapter, providing local connectivity to wireless networks. Simply plug the XStick into the USB port of a laptop or PC for instant access to an Digi XBee network and its connected devices. This compact, USB-powered wireless adapter enables local network configuration, diagnostics or device monitoring.

Two versions are available. The XStick 802.15.4 version is compatible with Digi XBee and Digi XBee-PRO® 802.15.4 devices and uses a fast multipoint network. The XStick ZigBee


version is compatible with Digi XBee or Digi XBee-PRO ZigBee devices and utilizes the ZigBee PRO Feature Set for robust mesh networks.

XStick is part of Digi's XBee family of solutions, offering users seamless wireless communication between devices, including adapters, routers and gateways.


## BENEFITS

- USB to XBee Wireless Personal Area Network adapter (WPAN)
- Provides local connectivity for access, configuration and network commissioning
- Available in self-healing, self-configuring ZigBee mesh or fast 802.15.4 multipoint versions
- USB powered
- LEDs for power status and network association

## RELATED PRODUCTS

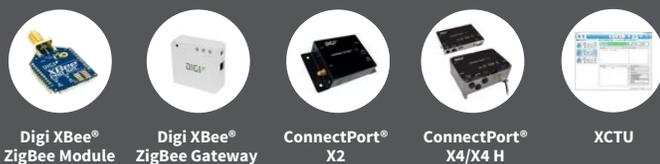

## APPLICATION EXAMPLE

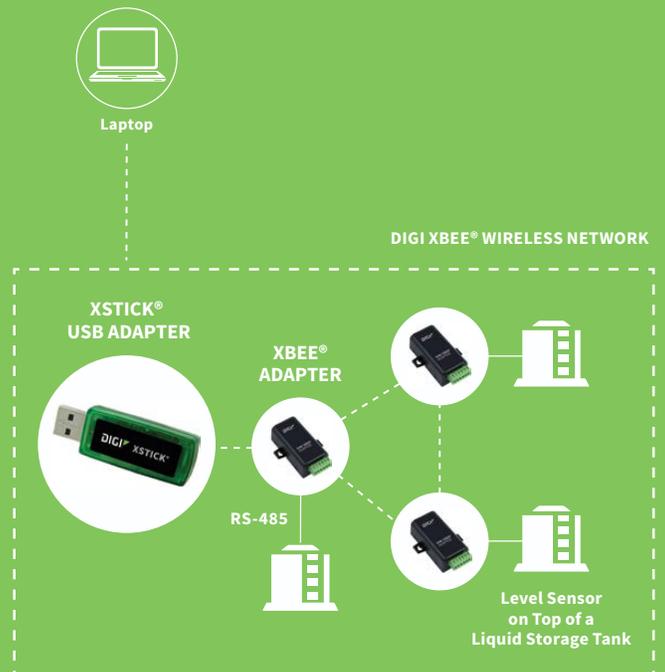

## SPECIFICATIONS

# XStick® ZigBee

# XStick® 802.15.4

### PERFORMANCE

<b>INDOOR/URBAN RANGE*</b>	Up to 66 ft (20 m)	Up to 49 ft (15 m)
<b>OUTDOOR/RF LINE-OF-SIGHT RANGE*</b>	Up to 164 ft (50 m)	Up to 131 ft (40 m)
<b>TRANSMIT POWER OUTPUT (NOMINAL 25° C)</b>	2.8 mW (4.5 dBm)	1 mW (0 dBm)
<b>RF DATA RATE</b>	250 Kbps	
<b>SERIAL INTERFACE DATA RATE (SOFTWARE SELECTABLE)</b>	1200 bps - 115.2 Kbps	
<b>RECEIVER SENSITIVITY</b>	-90 dBm	

### POWER REQUIREMENTS

<b>SUPPLY VOLTAGE</b>	5V from USB port of PC	
<b>TRANSMIT CURRENT</b>	51 mA	64 mA
<b>RECEIVE CURRENT</b>	47 mA	64 mA
<b>POWER-DOWN CURRENT</b>	XStick should not be put into sleep mode	

### GENERAL

<b>FREQUENCY BAND</b>	2.4 GHz ISM	
<b>DIMENSIONS (L X W X H)</b>	2.29 in x 0.80 in x 0.43 in (5.83 cm x 2.03 cm x 1.08 cm)	
<b>OPERATING TEMPERATURE</b>	-40° C to +85° C	
<b>CONNECTOR</b>	USB Type A	
<b>ANTENNA OPTIONS</b>	Internal only	


### NETWORKING & SECURITY

<b>SUPPORTED NETWORK TOPOLOGIES</b>	ZigBee Mesh	Point-to-Point, Point-to-Multipoint, Peer-to-Peer
<b>NUMBER OF CHANNELS (SOFTWARE SELECTABLE)</b>	16	
<b>ADDRESSING OPTIONS</b>	PAN, Channel, Address	


### REGULATORY APPROVALS

<b>FCC PART 15.247 (USA)</b>	MCQ-XSTICK2	MCQ-XSTICK1
<b>IC (CANADA)</b>	1846A-XSTICK2	1846A-XSTICK1
<b>ETSI (EUROPE)</b>	Yes	Yes
<b>TELEC (JAPAN)</b>	R201 WW 10215030	No


**XStick - Top View**

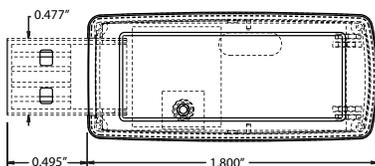

**XStick - Side View**



**XStick - Connector**



\*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

## PART NUMBERS

## DESCRIPTION

<b>XU-Z11</b>	XStick USB Adapter, ZigBee
<b>XU-A11</b>	XStick 802.15.4

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2018 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001463  
C6/518

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Zigbee Modules - 802.15.4 category:](#)*

*Click to view products by [Digi International manufacturer:](#)*

Other Similar products are found below :

[XBP24-ASI-080](#) [ATZB-RF-212B-0-CNR](#) [34560-894](#) [32411](#) [32416](#) [32406](#) [ZTU\(ujzh\)](#) [BB-WCD1H2102H](#) [BB-WCD1H3001HP100](#) [BB-WSD2C31010](#) [BB-WSD2M31010](#) [BB-WSK-SLM-2](#) [BB-WSD2C21150](#) [BB-WSK-CBM-2](#) [20848674](#) [CC-MX-LB58-ZM](#) [BB-WSD2M3101P2K](#) [WSD2M06010](#) [BB-WCD1H2102H](#) [BB-WSD2C21150](#) [BB-WSD2M31010](#) [WSD2CTJ](#) [WSD2MD2](#) [CC-MX-LB69-ZK](#) [WPMM1A01A](#) [WPMM1A02A](#) [WPMM1A05A](#) [ATZB-RF-233-1-CR](#) [ATSAMR21G18-MR210UA](#) [ATSAMR21G18-MR210UAT](#) [AX-SF10-ANT21-868-B1](#) [AX-SF10-MINI21-868-B1](#) [24572054](#) [114990002](#) [EM357-MOD-ANT-T](#) [ETRX3587HR-LRS](#) [WPMM1A00A](#) [ATZB-RF-212B-0-CN](#) [WMPR1A00B1A2](#) [WMPR1A02B1A2](#) [WMPR1A00B1A1](#) [WMPR1A02B1A1](#) [WPMM1A04A](#) [WPMM1A01B](#) [WPMM1A02AS01](#) [WMPR1A02A1A1](#) [CGW-Z-0010-01-00](#) [XB24CAPIS-001](#) [XB24CAPIT-001](#) [XB24CAUIT-001](#)