

OBSOLETE - PART DISCONTINUED

## Description

The ZMY20 is an extremely sensitive magnetic sensor employing the magneto-resistive effect of thin film permalloy. It allows the measurement of magnetic fields or the detection of magnetic parts. The highly sensitive and small size magnetoresistive sensors consist of a chip covered with thin film permalloy stripes. These stripes form a Wheatstone bridge, whose output voltage is proportional to the magnetic field component  $H_y$ . A perpendicular field  $H_x$  is necessary to stabilize sensor operation. This can be done by using a small permanent magnet.

## Features

- Output voltage proportional to magnetic field  $H_y$
- Adjustment of sensitivity and suppression of hysteresis by the auxiliary magnetic field  $H_x$
- Magnetic fields vertical to the chip level are not effective
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](mailto:contact@diodes.com) or your local Diodes representative. <https://www.diodes.com/quality/product-definitions/>**

## Applications


- Linear position sensors for process control, door interlocks, proximity detectors, machine tool sensing
- Scalar measurement for compassing
- Automotive - door switches, engine position and speed sensing
- Metering of fluids by sensing rotation of impeller
- Traffic counting and vehicle-type sensing
- Measurement of current in a conductor without connection

## Ordering Information

DEVICE	REEL SIZE	TAPE WIDTH	QUANTITY PER REEL
ZMY20TA	7"	12mm	1000 units
ZMY20TC	13"	12mm	4000 units


## Marking Information

- ZMY20



SOT223S

### PINOUT




### Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT	UNIT
Supply Voltage	$V_B$	12	V
Total power dissipation	$P_{TOT}$	120	mW
Operating Temperature Range	$T_{amb}$	-40 to +150	°C
Storage Temperature Range	$T_{stg}$	-65 to +150	°C

### Electrical Characteristics (@ $T_A = +25^\circ\text{C}$ and $H_x = 3\text{kA/m}$ , unless otherwise stated.)


PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Bridge resistance	$R_{br}$	1.2	1.7	2.2	k $\Omega$	
Output voltage range	$V_O/V_B$	16	20	24	mV/V	
Open circuit sensitivity	S	3.7	4.7	5.7	(mV/V)/(kA/m)	No disturbing field $H_d$ allowed
Hysteresis of output voltage	$V_{OH}/V_B$	-	-	50	$\mu\text{V/V}$	$H_y \leq 2\text{kA/m}$
Offset Voltage	$V_{off}/V_B$	-1.0	-	+1.0	mV/V	
Operating Frequency	$f_{max}$	0	-	1	MHz	
Temp. Coeff. of offset voltage	$TCV_{off}$	-3	-	+3	( $\mu\text{V/V}$ )/K	$T_{amb} = -25$ to $+125^\circ\text{C}$
Temp. Coeff. Of bridge resistance	$TCR_{br}$	0.25	0.3	0.35	%/K	$T_{amb} = -25$ to $+125^\circ\text{C}$
Temp. Coeff. of open circuit sensitivity $V_B = 5\text{V}$	$TCS_V$	-0.25	-0.3	-0.35	%/K	$T_{amb} = -25$ to $+125^\circ\text{C}$
Temp. Coeff. of open circuit sensitivity $I_B = 3\text{mA}$	$TCS_I$	-	-0.1	-	%/K	$T_{amb} = -25$ to $+125^\circ\text{C}$

OBSOLETE - PART DISCONTINUED

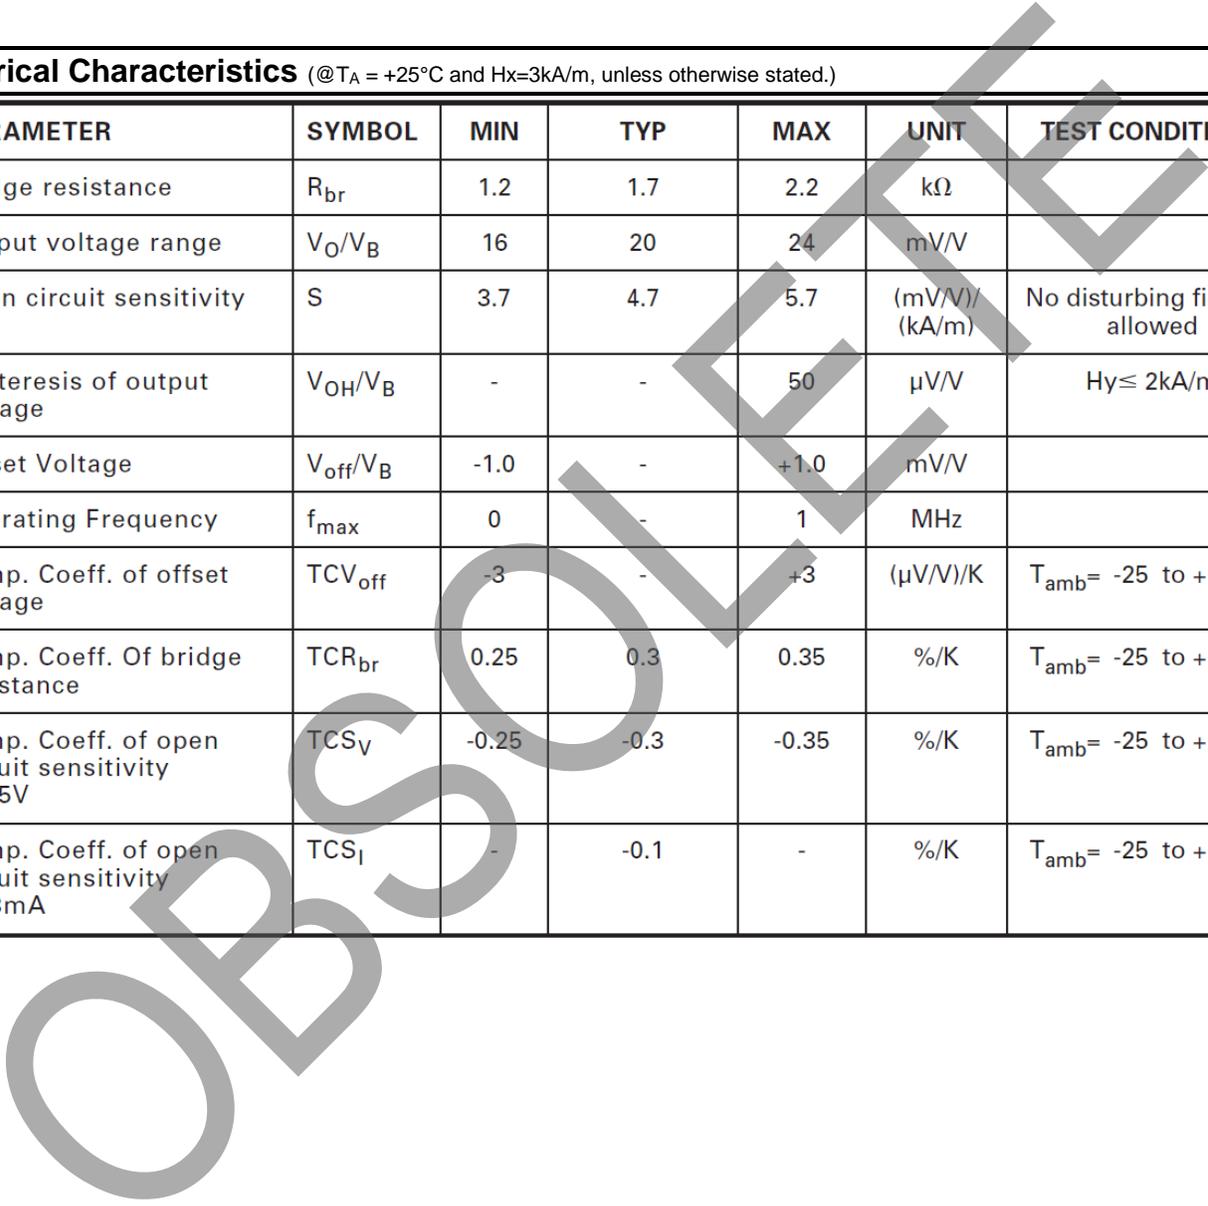


**Typical Applications Circuit**

Application 1 (digital output)

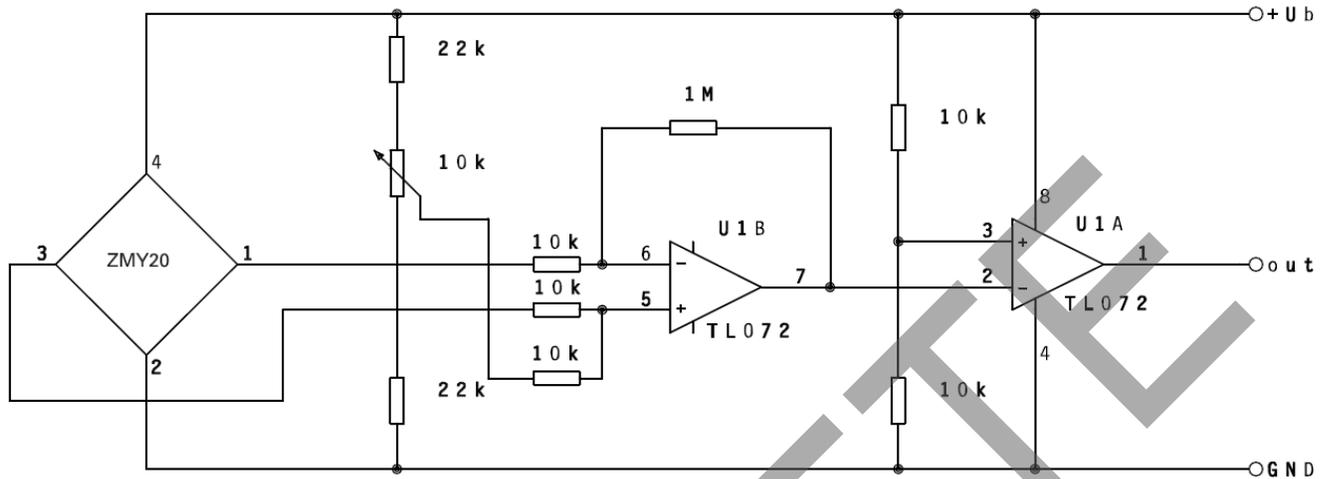


Application 2 (analog output)

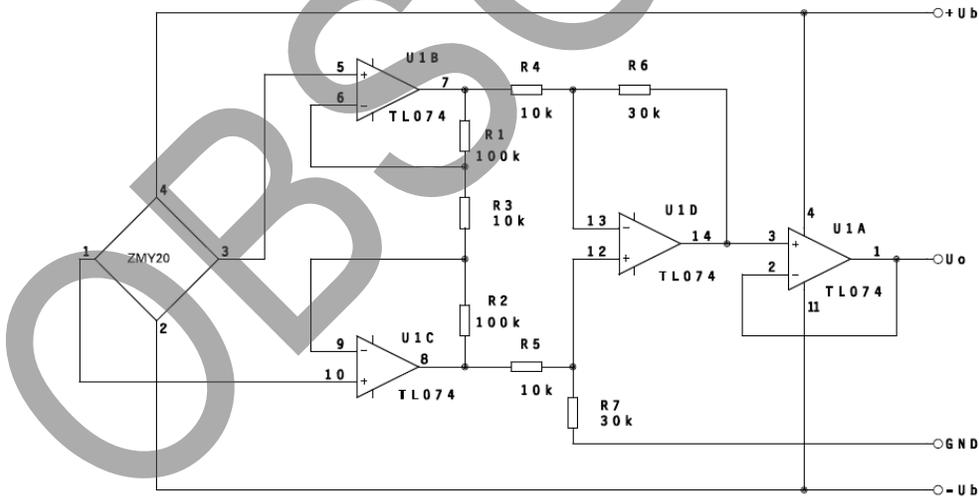


OBSOLETE - PART DISCONTINUED

Sensor output characteristic  
 $V_O = f(H_y)$ ;  $H_x$ -parameter  
 $V_b = \text{const}$ ;  $T_{\text{amb}} = 25^\circ\text{C}$

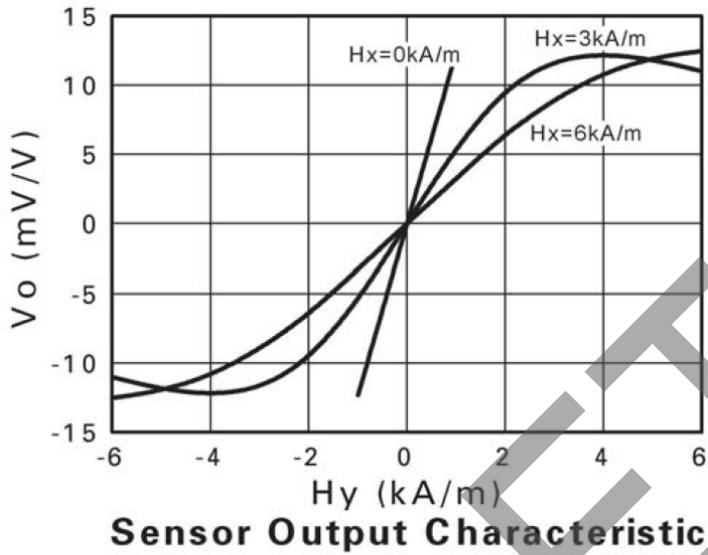

Safe operating area  
 $H_{x\text{tot}} = H_x + H_d$ ;  $T_{\text{amb}} = 25^\circ\text{C}$ ; ( $H_d$ =disturbing field)

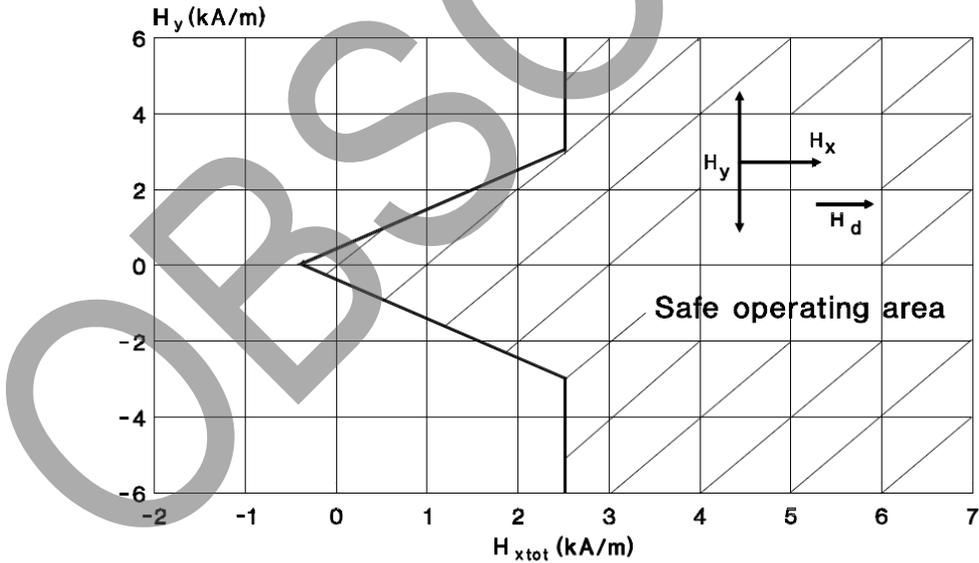


The sensor has to be reset after leaving the safe operating area by an auxiliary field of  $H_x = 3 \text{ kA/m}$


OBSOLETE - PART DISCONTINUED

OBSOLETE - PART DISCONTINUED

Sensor sensitivity characteristic  
 $S=f(H_x)$   
 $V_b=const; T_{amb}=25^{\circ}C$

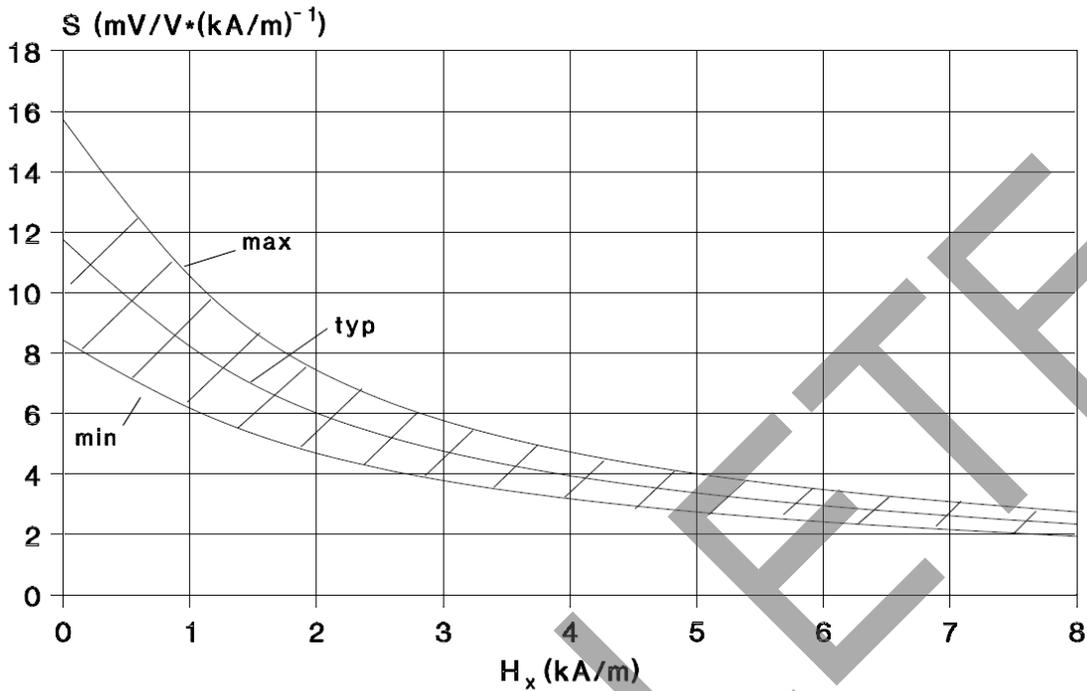


Supply voltage (maximum) derating curve  
 $V_{Bmax}=f(T_{amb})$

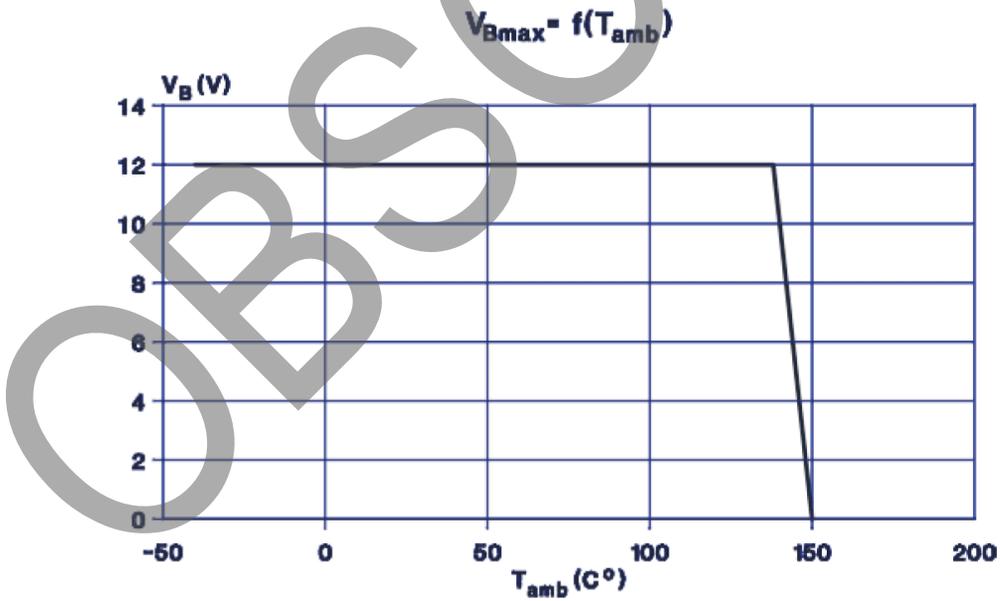

Device mounted on 40 x 40 mm<sup>2</sup> board (copper area 600mm<sup>2</sup>)

**Package Outline Dimensions**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

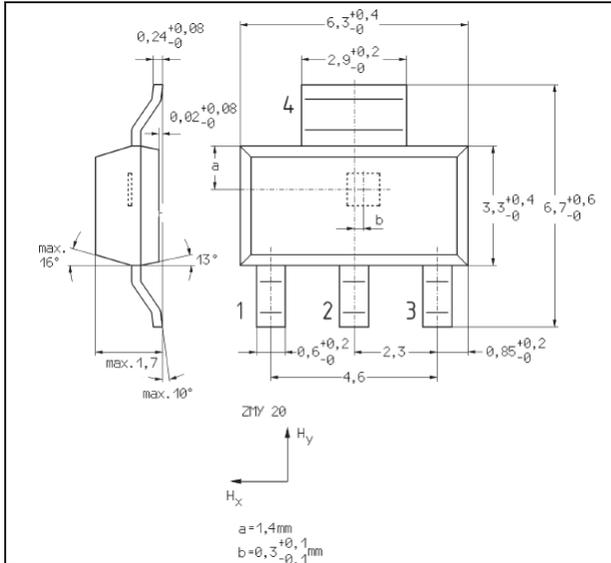

CONTROLLING DIMENSIONS IN MILLIMETRES  
APPROX CONVERSIONS INCHES.

OBSOLETE - PART DISCONTINUED

OBSOLETE

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2019, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Board Mount Motion & Position Sensors](#) *category:*

*Click to view products by* [Diodes Incorporated](#) *manufacturer:*

Other Similar products are found below :

[6SS4](#) [XL-10043](#) [F02008062](#) [9970-090-9J-SA](#) [NJL5820R-TE4](#) [MT9105ET](#) [AS5270B-HMFM](#) [IPS2200BI1W](#) [AMN11111](#) [AMN24112](#)  
[AMN31111](#) [AMN34112](#) [AMN23111](#) [EKMC1693113](#) [EKMB1303111K](#) [EKMB1293112](#) [RBS130100](#) [RBS130200](#) [EKMB1305113K](#)  
[EKMB1105113](#) [EKMB1205113](#) [EKMC1605113](#) [3-AXIS DIGITAL ACCELEROMETER\(±1.5G\)](#) [3-AXIS DIGITAL](#)  
[ACCELEROMETER\(±16G\)](#) [9536](#) [AMA145915](#) [AMN13112](#) [SLIDE POTENTIOMETER](#) [TILT SWITCH](#) [3-AXIS DIGITAL GYRO](#)  
[MTS360-1S-C0000-ERA360-05K](#) [MTS360-2AA-C0002-ERA360-05K](#) [EVA-W7XR04B34](#) [A153PTS-332DDB4040](#) [MTS360-1A-C0000-](#)  
[ERA360-05K](#) [MTS360-1P-C0000-ERA360-05K-F200](#) [MTS360PCB3-1A-C0000-ERA360-05E](#) [NPL08M08-103-3030-S](#) [AS5600L-AWLM](#)  
[APS00A](#) [APS00B](#) [IQS625-0-TSR](#) [USEQMSEA220980](#) [USEQMSEA011680](#) [USEQMSEA221680](#) [USEQMSK1220900](#) [USEQMSM1221600](#)  
[USEQMSM1011600](#) [USEQMSM1220900](#) [MA40S4R](#)