

# ECS-3X8X, 2X6X, 1X5X

32.768 KHz Tuning Fork Crystal



ECS tuning fork type crystals are used as a clock source in communication equipment, measuring instruments, microprocessors and other time management applications. Their low power consumption makes these crystals ideal for portable equipment.


Request a Sample

### ECS-3X8X, 2X6X, 1X5X




- Cost Effective
- Tight Tolerance
- Long Term Stability
- Excellent Resistance and **Environmental Characteristics**
- Pb Free/RoHS Compliant

### **DIMENSIONS (mm)**








## **OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

| PARAMETERS                     |                             | 3X8X                  | 2X6X                  | 1X5X                  | UNITS   |
|--------------------------------|-----------------------------|-----------------------|-----------------------|-----------------------|---------|
| Frequency                      | Fo                          | 32.768                | 32.768                | 32.768                | KHz     |
| Frequency Tolerance            | Δf/fo                       | ±20                   | ±20                   | ± 20                  | ppm     |
| Load Capacitance               | $C_L$                       | 12.5                  | 12.5                  | 8.0                   | рF      |
| Drive Level (max)              | $D_L$                       | 1                     | 1                     | 1                     | μW      |
| Resistance At Series Resonance | $R_1$                       | 35(max)               | 35(max)               | 40(max)               | ΚΩ      |
| Q-Factor                       | Q                           | 90,000(typ.)          | 70,000(typ.)          | 80,000(typ.)          |         |
| Turnover Temperature           | T <sub>M</sub>              | +25 ±5                | +25 ±5                | +25 ±5                | °C      |
| Temperature Coefficient        | ß                           | -0.040ppm/°C²<br>max. | -0.040ppm/°C²<br>max. | -0.040ppm/°C²<br>max. | PPM/ΔC° |
| Shunt Capacitance              | acitance C <sub>O</sub> 1.0 |                       | 1.35 (typ.)           | 1.00 (typ.)           | рF      |
| Capacitance Ratio              |                             | 460 (typ.)            | 450 (typ.)            | 400 (typ.)            |         |
| Operating Temp                 | Topr                        | -10 ~ +60             |                       |                       | °C      |
| Storage Temperature            | Tstg                        |                       | °C                    |                       |         |
| Shock Resistance               |                             | Drop 3 times height o | PPM                   |                       |         |
| Insulation Resistance          | IR                          | 500                   | МΩ                    |                       |         |
| Aging (First Year)             | Δf/fo                       | ±3 ppr                | ppm                   |                       |         |
| Motional Capacitance           | C <sub>1</sub>              | 0.0035(typ.)          | 0.0030(typ.)          | 0.0025(typ.)          | pF      |

#### RECOMMENDED OSCILLATION CIRCUIT




#### **ELECTRICAL CHARACTERISTICS**

IC: TC 4069P Rf: 10MΩ Rd: 330KΩ (As required)  $C_1 = 22pF, C_2 = 22pF$  $V_{DD} = 3.0V$ 

In this circuit, low drive level with a maximum of 1µW is rec-ommended. If excessive drive is applied, irregular oscillation or quartz element fractures may occur.

#### PARABOLIC TEMPERATURE CURVE



To determine frequency stability, use parabolic curvature. For example: What is the stability at 45°C?

1) Change in T (°C) 2) Change in frequency =  $-0.04 \text{ PPM x } (\Delta T)^2$ 

= 45 -25 = 20°C

 $= -0.04 PPM \times (20)^2$ = -16.0 PPM

#### **PART NUMBERING GUIDE:**

| TAKE NOWING COIDE. |   |           |   |                  |   |               |  |  |
|--------------------|---|-----------|---|------------------|---|---------------|--|--|
| Manufacturer       |   | Frequency |   | Load Capacitance |   | Package Type* |  |  |
|                    |   |           |   |                  |   |               |  |  |
| ECS                | - | .327      | - | 12.5             | - | 8X            |  |  |
| ECS                | - | .327      | - | 12.5             | - | 13X           |  |  |
| ECS                | - | .327      | - | 12.5             | - | 14X           |  |  |
|                    |   |           |   |                  |   |               |  |  |

<sup>\*</sup> Package type examples (8X = 3x8, 13X = 2x6, 14X = 1x5)



| SOLDER PROFILE                          |  |  |  |  |  |
|---|--|--|--|--|--|
| Peak solder Temp +260°C Max 10 sec Max. |  |  |  |  |  |
| 2 Cycles Max.                           |  |  |  |  |  |
| MSL 1, Lead Finish Sn/Cu Matte          |  |  |  |  |  |

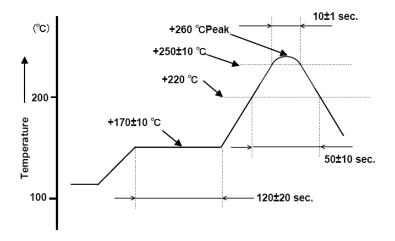


Figure 1) Suggested Solder Profile

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by ECS Inc manufacturer:

Other Similar products are found below:

MC405 32.0000K-R3:PURE SN 7B-27.000MBBK-T MP1-8.0 99-BU 9B-15.360MBBK-B PTX-A2JM-10.000M 9C-7.680MBBK-T H10S-12.000-18-EXT-TR ABLS-18.432MHZ-20-D-4-T R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 MP-1-25.000MHZ-3L MP-1-6.000MHZ LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7B-30.000MBBK-T 9B-14.31818MBBK-B 6504-202-1501 6526-202-1501 FA-118T 27.1200MB50P-K0 BTJ120E02C SG636PCE-20.000MC 3404 CX3225SB48000Z0DZNC1 C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R FL5000014 EUCA18-3.1872M 425F35E027M0000 FP0800018 17196 MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au VXM7-1C1-16M000 MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au CX2016DB48000C0FPLC1 ECS-80-18-30-JGN-TR