

2.5 dB NF Low Noise Amplifier, Operating from 10 MHz to 800 MHz with 42 dB Gain, 17 dBm P1dB and SMA

The PE15A1041XX is a low noise RF coaxial amplifier operating in the 2 GHz to 4 GHz frequency range. The amplifier offers 0.7 dB typical noise figure, 14 dBm typical P1dB and high 40 dB minimum small signal gain. This performance is achieved through the use of hybrid MIC design and advanced SiGe Bipolar devices. The low noise amplifier requires typically a +12V DC power supply. The amplifier desing input/output ports are internally matched to 50 ohms and are DC blocked. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation. This low noise amplifier requires only a single positive supply, is unconditionally stable and operates over the temperature range of -40°C and +75°C.

Electrical Specifications (TA = +25°C , DC Voltage = 12Vdc , DC Current = 100mA)

Description	Min	Typ	Max	Unit
Frequency Range	10		800	MHz
Small Signal Gain	37.5	42		dB
Gain Flatness		±0.7	±1.5	dB
Output at 1 dB Compression Point	+17	+17		dBm
Output 3rd Intercept Point	+28	+30		dBm
Noise Figure			2.5	dB
Input VSWR		1.7:1	2:1	
Output VSWR		1.2:1	1.5:1	
Reverse Isolation		-50		dB
Operating DC Voltage	10	12	15	Volts
Operating DC Current		100	120	mA
Operating Temperature Range	-40		+75	°C

RF Characteristic

Description	F1	F2	F3	Units
Frequency Range	0.01 to 0.01	0.01 to 0.4	0.4 to 0.8	GHz
Small Signal Gain	42	41	39.5	dB



Features:

- 2 GHz to 4 GHz Frequency Range
- P1dB: 14 dBm
- High Small Signal Gain: 40 dB typical
- Noise Figure: 0.7dB typ
- 50 Ohm Input and Output Matched
- -40 to 75°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in Voltage Regulator

Applications:

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Cellular Base Stations
- Low Noise Amplifier
- General Purpose Amplification
- General Purpose Wireless
- Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- RF Pre-amplification
- Fixed and Land Mobile

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Absolute Maximum Rating

Parameter	Rating	Units
Supply Voltage	+16	V
RF Input Power	+13	dBm
Operating Temperature	-40 to +85	°C
Storage Temperature	-55 to +125	°C



ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Mechanical Specifications

Size

Weight	0.086 lbs [39.01 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-40 to +75 deg C
Storage Range	-55 to +125 deg C


Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

- Values at 25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Typical Performance Data

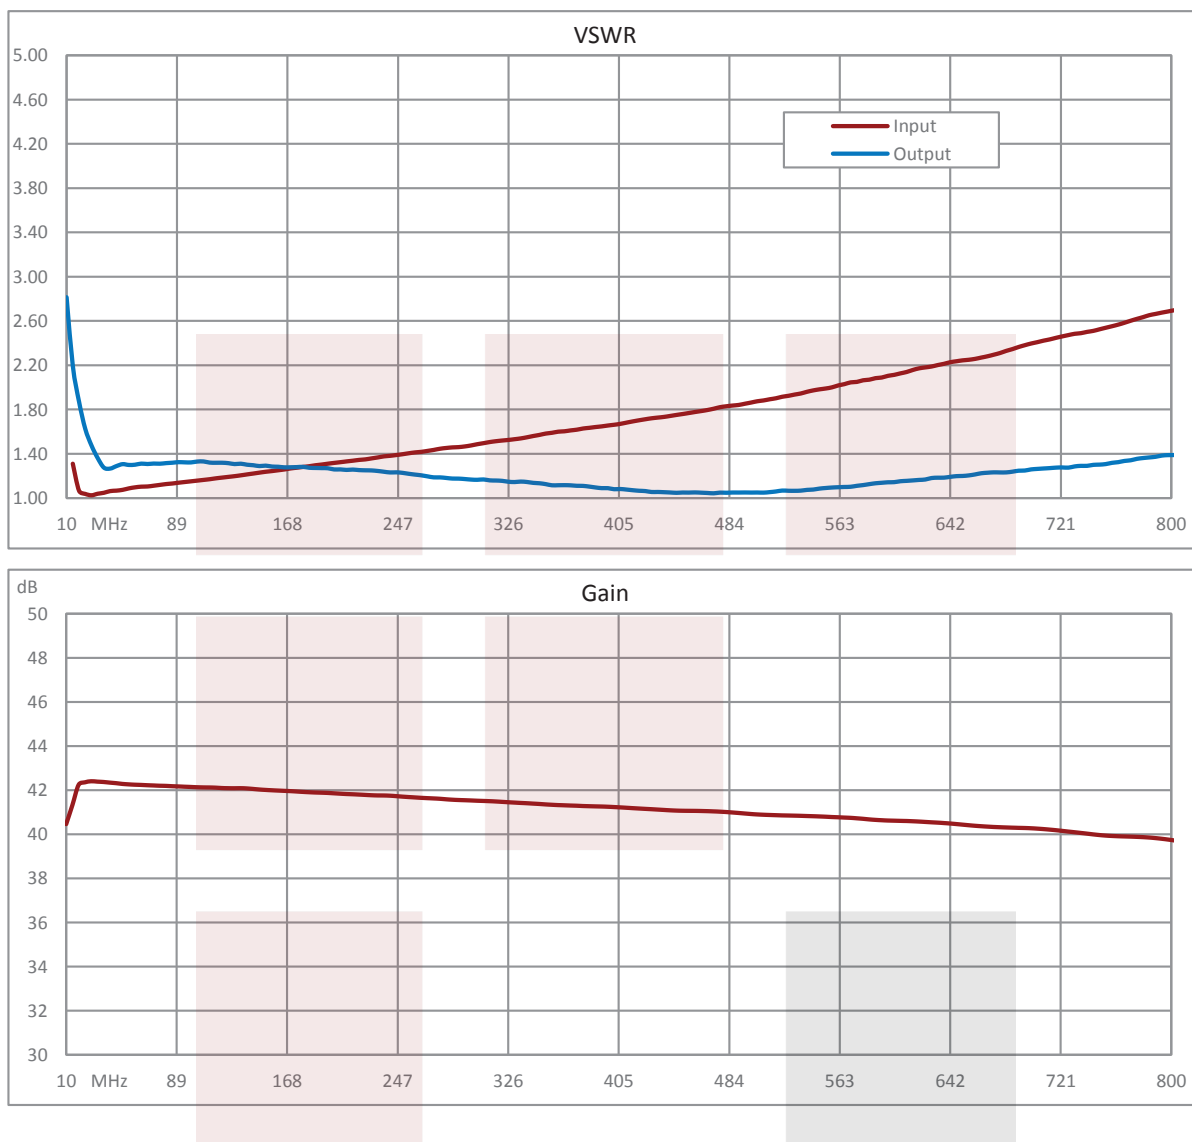

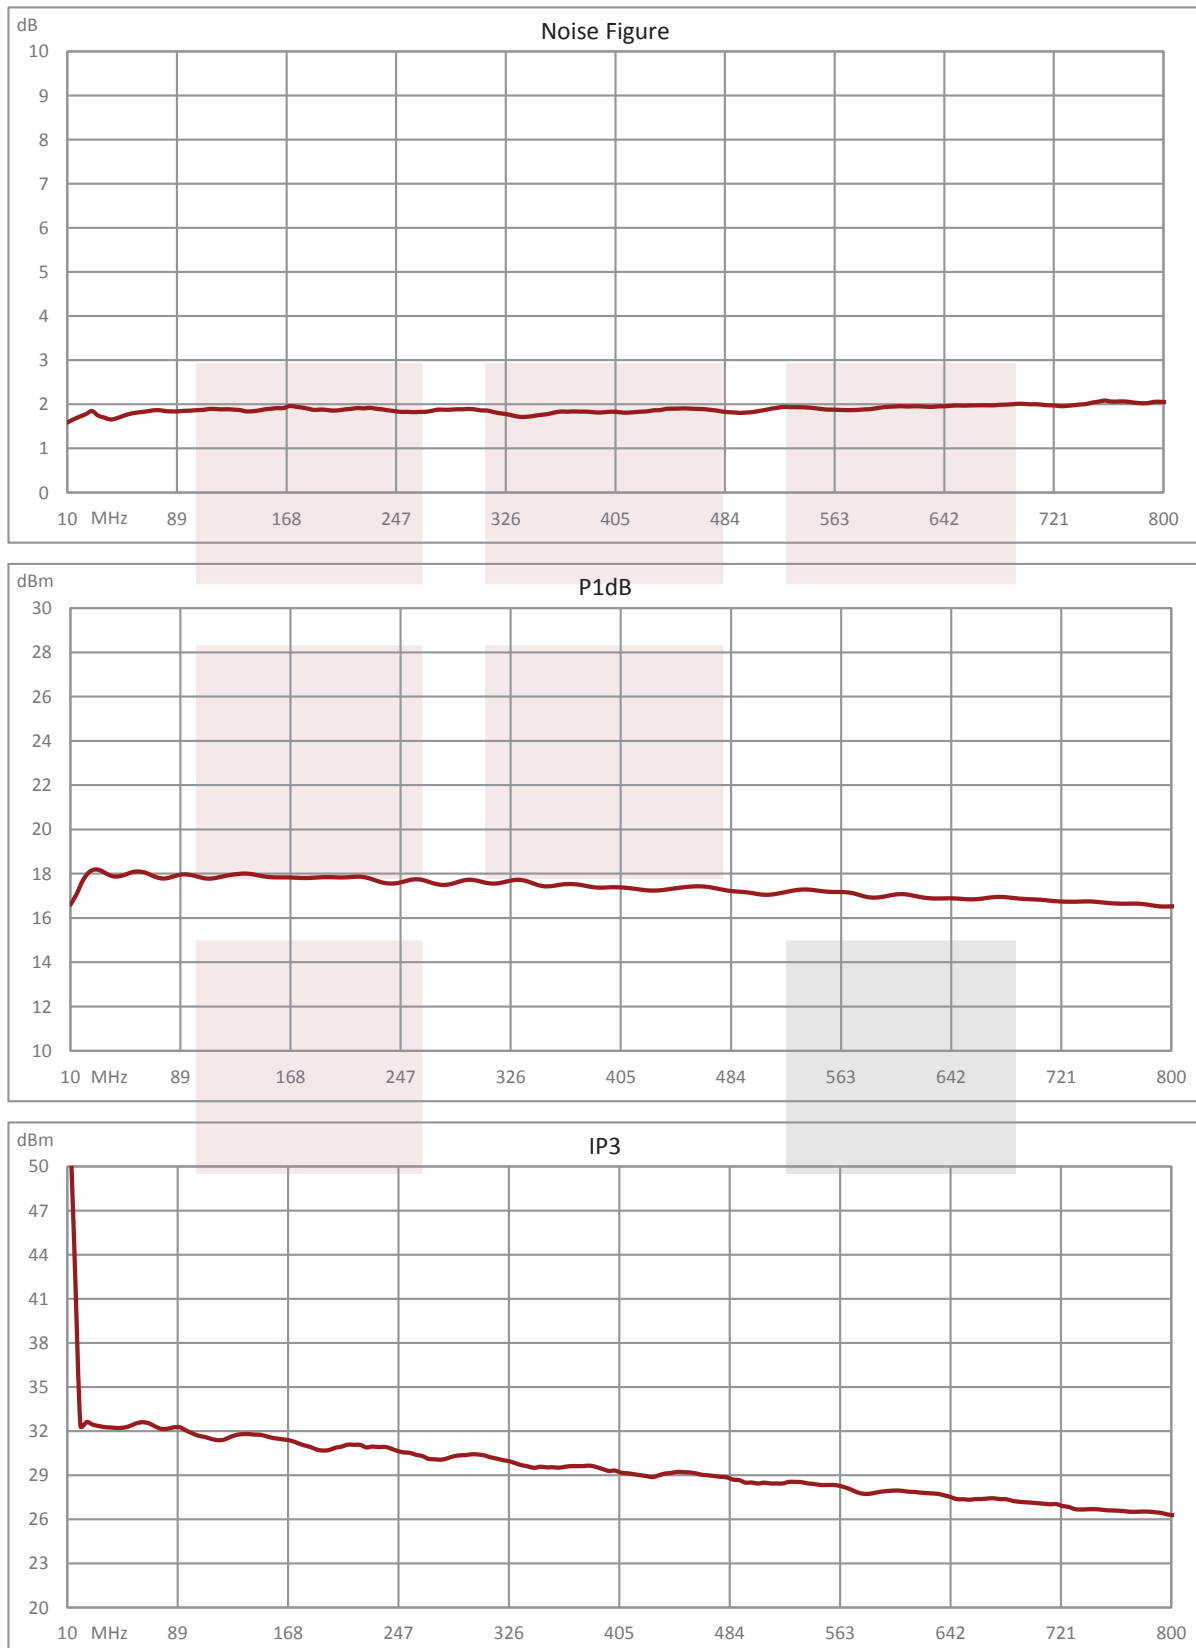

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Amplifier](#) category:

Click to view products by [Fairview Microwave](#) manufacturer:

Other Similar products are found below :

[AL7](#) [SE2433T-R](#) [A66-3](#) [SMA411](#) [SST12LP19E-QX6E](#) [BGU6009/N2X](#) [BGS8H2X](#) [BGS8324Z](#) [MMG30301BT1](#) [MMA041PP5](#) [A57](#)
[MMA044PP3](#) [BGA 5H1BN6 E6327](#) [BGA824N6E6329XTSA1](#) [A75](#) [BGA524N6E6329XTSA1](#) [CGY2144UH/C2](#) [MAAP-011378-DIE](#)
[MAAL-009120-TR3000](#) [MAAP-010169-001SMB](#) [BGU8103X](#) [F0480NBGI8](#) [BGA420H6327XTSA1](#) [SKY65095-360LF](#) [MAX2644EXT+T](#)
[MAX2611EUS+T](#) [BGA6130,118](#) [BGA616H6327XTSA1](#) [BGU7004,115](#) [MAAM02350-A2](#) [CMPA2560025F](#) [BGA8V1BN6E6327XTSA1](#)
[BGC100GN6E6327XTSA1](#) [BGA8U1BN6E6327XTSA1](#) [MGA-655T6-BLKG](#) [LTC6430AIUF-20#PBF](#) [HMC717ALP3E](#) [MMZ27333BT1](#)
[HMC8410LP2FETR](#) [BGA3131J](#) [MAAP-011232-TR0500](#) [GRF4142](#) [CMPA601C025F](#) [MAAM-011229-TR1000](#) [MAAM-011206-TR3000](#)
[MAAM-009286-TR3000](#) [MAAL-011111-TR0500](#) [GRF2105](#) [SKY66294-11](#) [GRF2133](#)