

136-940MHz, 2.5 dBi Gain, Omni-directional Antenna with Magnetic NMO Mount, N-Male Connector

Description

The FMANMOB1004-NM from Fairview Microwave is an omnidirectional antenna with a 2.5 dBi gain that transmits high-power signals and faster speed. This in-building antenna comes with a magnetic NMO mount specifically designed for high-performance applications. Our high-quality omni antenna is available in black color and can be procured with no order limit. This vertically polarized antenna has a frequency range of 136 to 940 MHz, which is ideal for indoor low-profile, in-building, and mobile applications.

The NMO-type magnetic mount on Fairview Microwave's FMANMOB1004-NM omnidirectional antenna makes it an ideal solution when the portability of the antenna is needed. This NMO antenna mount is constructed with a heavy-duty magnet to ensure secure mounting. The magnetic base allows a temporary plug-and-play installation. No drilling is required for the installation of this antenna mount, making it easy to fine-tune the antenna location. This magnetic mount has an N-type male connector and can be used for WLAN, Wi-Fi, public safety, and mobile RF applications.


Fairview Microwave has one of the largest in-stock selections of omnidirectional in-building antennas with the same-day shipment. Make your online purchase right now to take advantage of our same-day shipping. For further information on similar products, our expert technical support and knowledgeable sales team can help you get the ideal vertically polarized antenna with a magnetic NMO mount for your requirements.

Configuration

Design	Omni
Gain	2.5
Polarization	Vertical
Connector Type	N Male
Number of Ports	1

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range (Tunable)	136		940	MHz
Operational Bandwidth		5		MHz
Input VSWR			1.5:1	
Gain		2.5		dBi
Input Power			50	Watts




Features:

- Outdoor Rated Omni Directional Antenna
- 2.5 dBi Gain
- Easy to install magnetic mount offering temporary plug and play installation
- NMO Magnetic Mount, Black ABS Radome
- 1.5:1 VSWR Max
- 10 Foot, Black Low-Loss LMR195 Equivalent Cable
- N-Male Connector
- Tunable Frequency

Applications:

- Offroad/Overland Vehicles
- Mining/Industrial
- Heavy Equipment
- Commercial Trucking
- Fleet Management
- Farm Equipment

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

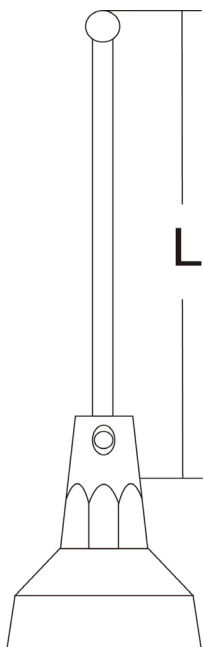

Frequency(MHz)	136	138	142	146	150	154	158	162	166
Length(mm)	521	490	476	458	447	434	423	408	395

Frequency(MHz)	170	174	200	210	220	230	240	250	260
Length(mm)	390	383	334	315	297	285	269	259	247

Frequency(MHz)	270	280	290	300	310	320	330	340	350
Length(mm)	238	227	219	208	203	195	185	180	174

Frequency(MHz)	360	370	380	390	400	410	420	430	440
Length(mm)	170	165	160	156	150	148	145	139	136

Frequency(MHz)	450	460	470	480	490	500	510	520	540
Length(mm)	133	128	125	120	115	112	108	107	105

Frequency(MHz)	570	600	630	680	690	720	750	780	800
Length(mm)	101	98	92	89	87	82	77	74	71

Frequency(MHz)	810	820	830	840	850	860	870	880	890
Length(mm)	68	66	65	64	62	61	60	59	58

Frequency(MHz)	900	910	920	930	940
Length(mm)	57	56	55	54	53

Mechanical Specifications

Radome Material

Stainless Steel

Size

Length

20.49 in [520.45 mm]

Width

3 in [76.2 mm]

Height

3 in [76.2 mm]

Weight

1.24 lbs [562.45 g]

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

1: Loosen Screw, Sperate Whip and Base.

2: Find whip length of correct frequency according to cuting chart.

3: Measure the length of the steel whip and cut it from bottom side with-out cap.


4: Re-fix the steel whip and the base with screws.

136-940MHz, 2.5 dBi Gain, Omni-directional Antenna with Magnetic NMO Mount, N-Male Connector from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [136-940MHz, 2.5 dBi Gain, Omni-directional Antenna with Magnetic NMO Mount, N-Male Connector FMANMOB1004-NM](#)

URL: <https://www.fairviewmicrowave.com/136-940mhz-2.5-dbi-gain-omni-directional-antenna-with-magnetic-nmo-mount-n-male-connector-fmanmob1004-nm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

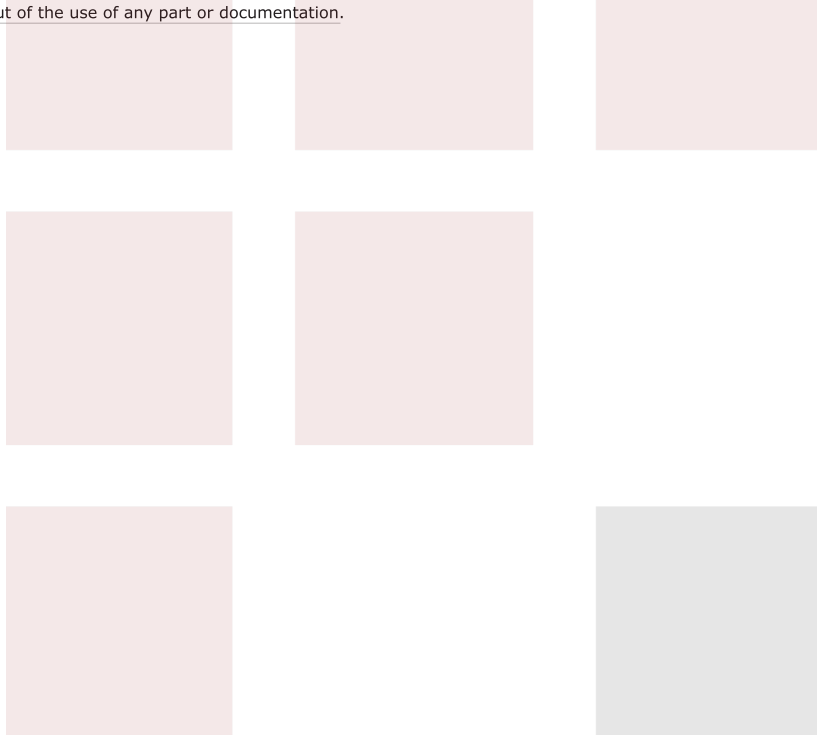

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Fairview Microwave](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [A09-F8NF-M](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [0600-00060](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#) [29000863](#) [EXD450TN](#) [2.4GHz 2dBi-1.13-L=50mm](#) [3E0702BK-005](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#) [KH-113-TX60B-IPEX4](#) [KH-081-TX300-IPEX](#) [3K0001BK00-001](#) [3K0001BK00-002](#) [3N0401LG-038](#) [3N0401BK-049](#) [PRO-OB-440](#) [DL-F8-5G](#)