

2 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts

Fairview Microwave carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Fairview Microwave's resistive and reactive power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types.

The MP0208-2 is a 2 way reactive power divider that operates from 2 to 8 GHz and can handle up to 30 Watts (CW). This SMA power divider offers 20 dB min isolation and 1.4:1 max VSWR. The package interface uses SMA inputs on all of the ports.

Electrical Specifications

Design Reactive
Number of Output Ports 2

Description	Min	Typ	Max	Units
Frequency Range	2		8	GHz
Impedance		50		Ohms
Input VSWR			1.4:1	
Output VSWR			1.4:1	
Insertion Loss			4	dB
Isolation	20			dB
Amplitude Balance			±0.3	dB
Phase Balance			±4	Degrees
Input Power (CW)			30	Watts

Electrical Specification Notes:
Values at +25°C, sea level.
Insertion loss includes 3dB theoretical loss.

Mechanical Specifications

Size
Length 1.102 in [27.99 mm]
Width 1.102 in [27.99 mm]
Height 0.393 in [9.98 mm]
Weight 0.0435 lbs [19.73 g]
Housing Material and Plating Aluminum, Gray

Configuration
Input Connector SMA Female
Output Connectors SMA Female

Environmental Specifications

Temperature
Operating Range -55 to +85 deg C
Storage Range -55 to +100 deg C



Features:

- 2-Way Power Divider
- Reactive Design
- 2 GHz to 8 GHz Frequency Range
- Max Power 30W (CW)
- Isolation > 20 dB

Applications:

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM


Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

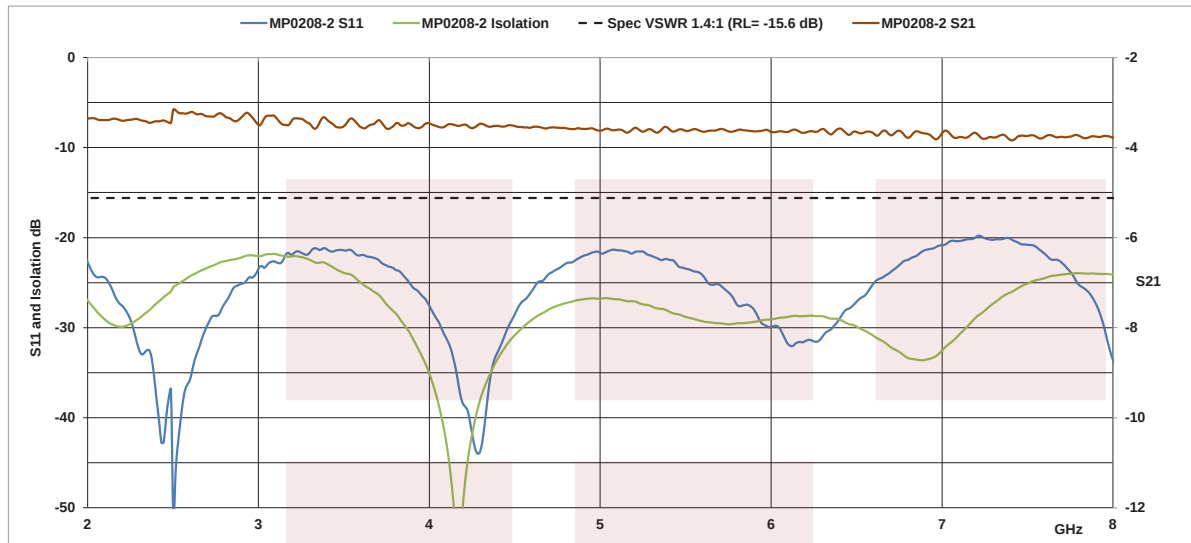

2 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [2 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts MP0208-2](#)

URL: <https://www.fairviewmicrowave.com/2-way-power-divider-sma-8-ghz-20-watts-mp0208-2-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Fairview Microwave](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)