

**FEATURES**

- Ø 800 µm active area
- Low slope multiplication curve
- High speed, low noise
- NIR enhanced

**DESCRIPTION**

0.50 mm<sup>2</sup> High Speed, Low Noise Avalanche Photodiode with N on P construction. Hermetically packaged in a TO-52-S1 with a clear borosilicate glass window cap.

**APPLICATIONS**


- High speed optical communications
- Laser range finder
- Medical equipment
- High speed photometry



**ABSOLUTE MAXIMUM RATING**

SYMBOL	PARAMETER	MIN	MAX	UNITS
T <sub>STG</sub>	Storage Temp	-55	+125	°C
T <sub>OP</sub>	Operating Temp	-40	+100	°C
T <sub>SOLDERING</sub>	Soldering Temp 10 seconds		+260	°C
	Electrical Power Dissipation @ 22°C	-	100	mW
	Optical Peak Value, once for 1 second	-	200	mW
I <sub>PH</sub> (DC)	Continuous Optical Operation	-	250	µA
I <sub>PH</sub> (AC)	Pulsed Signal Input 50 µs "on" / 1 ms "off"	-	1	mA

**SPECTRAL RESPONSE at M = 100**

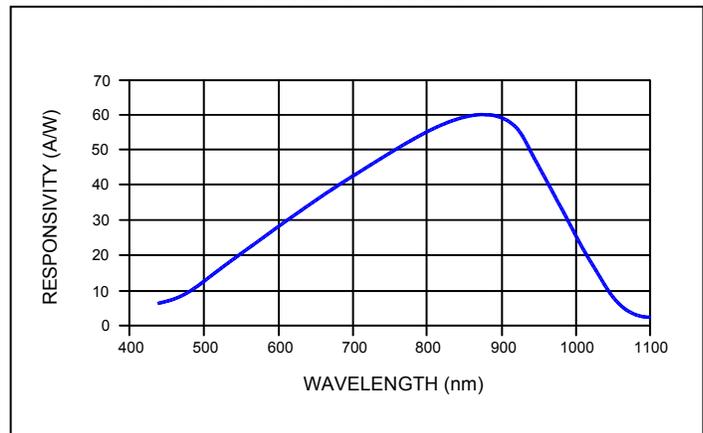


**ELECTRO-OPTICAL CHARACTERISTICS @ 22 °C**

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I <sub>D</sub>	Dark Current	M = 100*	---	2.0	6.0	nA
C	Capacitance	M = 100*	---	2.0	---	pF
V <sub>BR</sub>	Breakdown Voltage	I <sub>D</sub> = 2 µA	180	240	---	V
	Temperature Coefficient of V <sub>BR</sub>		---	1.55	---	V/K
	Responsivity	M = 100; = 0 V; λ = 905 nm	55	60	---	A/W
Δf <sub>3dB</sub>	Bandwidth	-3dB	---	0.3	---	GHz
t <sub>r</sub>	Rise Time	M = 100	---	900	---	ps
	Optimum Gain		50	60	---	
	"Excess Noise" factor	M = 100	---	2.5	---	
	"Excess Noise" index	M = 100	---	0.2	---	
	Noise Current	M = 100	---	3.0	---	pA/Hz <sup>1/2</sup>
	Max Gain		200	---	---	
NEP	Noise Equivalent Power	M = 100; λ = 905 nm	---	4.0 X 10 <sup>-14</sup>	---	W/Hz <sup>1/2</sup>


\* Measurement conditions: Setup of photo current 10 nA at M = 1 and irradiated by a 880 nm, 80 nm bandwidth LED. Increase the photo current up to 1 µA, (M = 100) by internal multiplication due to an increasing bias voltage.

Disclaimer: Due to our policy of continued development, specifications are subject to change without notice.


## TYPICAL GAIN vs BIAS VOLTAGE

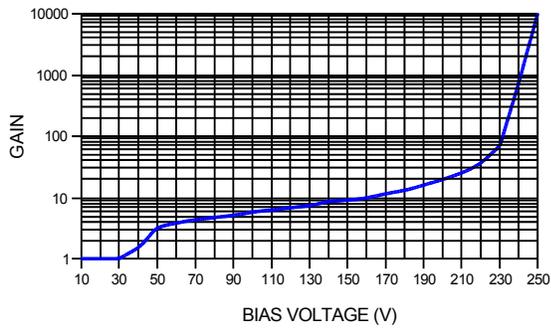


## QUANTUM EFFICIENCY for M = 100

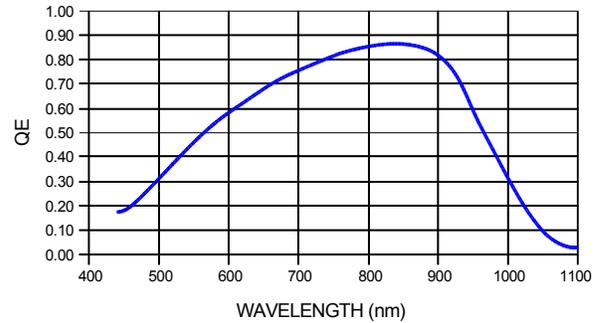

## DEVICE SCHEMATIC



## SUGGESTED CIRCUIT SCHEMATIC



## APPLICATION NOTES

- Current should be limited by a protecting resistor or current limiting IC inside the power supply.
- Use of low noise read-out IC.
- For high gain applications ( $M > 50$ ) bias voltage should be temperature compensated.
- For low light level applications, blocking of ambient light should be used.

## HANDLING PRECAUTIONS:

- Soldering temperature - 260°C for 10 seconds max. The device must be protected against solder flux vapor.
- Minimum pin length - 2 mm
- ESD protection - Standard precautionary measures are sufficient.
- Storage - Store devices in conductive foam.
- Avoid skin contact with window.
- Clean window with Ethyl alcohol if necessary.
- Do not scratch or abrade window.

### USA:

Pacific Silicon Sensor, Inc.  
 5700 Corsa Avenue, #105  
 Westlake Village, CA 91362 USA  
 Phone (818) 706-3400  
 Fax (818) 889-7053  
 Email: [sales@pacific-sensor.com](mailto:sales@pacific-sensor.com)  
[www.pacific-sensor.com](http://www.pacific-sensor.com)

### International sales:

Silicon Sensor International AG  
 Peter-Behrens-Str. 15  
 D-12459 Berlin, Germany  
 Phone +49 (0)30-63 99 23 10  
 Fax +49 (0)30-63 99 23 33  
 Email: [sales@silicon-sensor.de](mailto:sales@silicon-sensor.de)  
[www.silicon-sensor.de](http://www.silicon-sensor.de)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Photodiodes](#) category:*

*Click to view products by [First Sensor](#) manufacturer:*

Other Similar products are found below :

[LTR-526AD](#) [OED-SP-7L](#) [LTR-536AB](#) [LTR-743DBM1-TA](#) [67-21SYGC-S349-TR8](#) [SFH 2200 A01](#) [HFD3081-108-XBA](#) [BPW 34 S E9601](#)  
[SFH 2713](#) [SFH 2703](#) [LTR-546AD](#) [BPV23FL](#) [BPW 34 FAS](#) [BPW 34 FS](#) [IG22X250S4I](#) [VTD205H](#) [VTD205KH](#) [VTP1220FBH](#) [VTP1232FH](#)  
[VTP4085H](#) [SFH 2400](#) [OP913WSL](#) [OPF794](#) [PD70-01C/TR7](#) [LTR-536AD](#) [VTP8651H](#) [VTD206KH](#) [VTB1013H](#) [BPV23NF](#) [OP905](#) [LTR-](#)  
[516AD](#) [BPW 34 FS-Z](#) [VTD34FH](#) [QSB34CGR](#) [SFH 2500 FA](#) [SFH 213 FA](#) [PD15-22C/TR8](#) [VEMD5510C](#) [SFH 2200](#) [VEMD5510CF](#)  
[APS5130PD7C-P22](#) [SAH230M](#) [SAH230M2](#) [SAH500M2](#) [BP 104 FS](#) [BPV22F-AS12](#) [BPW 21](#) [BPW 34 SR-Z](#) [BPX 65](#) [HSDL-5400#011](#)