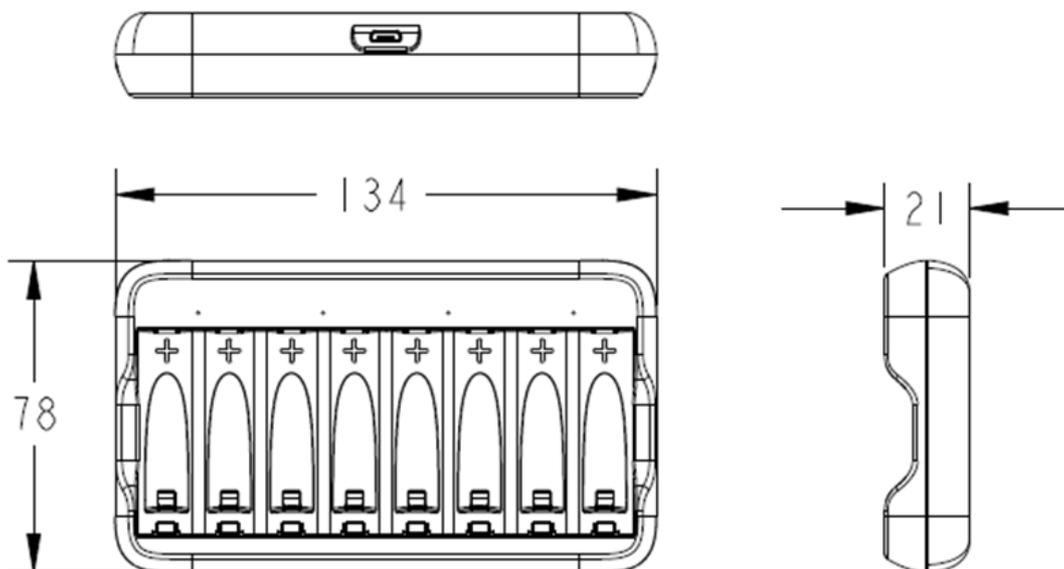


**Product Specification****Model no.: PPU813**

Product Name	:	USB 4-Slot Charger <b>PPU813</b>
Input	:	DC5V 1A
Charging Channels	:	4 independent channels ; 2 slots/channel for 2, 4, 6 or 8 pcs AA/AAA Ni-MH batteries
Output Voltage	:	2.8V
Charging Current	:	250mA approx for AA/AAA Ni-MH batteries
Charging Time	:	Approx. 550 Min for 2000mAh ; Approx. 1220 Min for 800mAh
Trickle Charging Current	:	50mA approx for AA/AAA Ni-MH batteries
Standby current at no input	:	<0.1mA
Operation Temperature	:	0°C to 35°C
LED Indication	:	Green LED ON for 0.5 second after just USB power input Charging in progress - Green LED slow flashing Fully charged – Green LED ON Bad/Primary Batteries inserted – Green LED fast flash
Safety protection	:	1) Timer protection – 14 hours 2) -dv
Dimensions	:	134 (L) x 78 (W) x 21 (H) mm
Weight	:	77 g (approx.)
Certification	:	CE, FCC, Rohs
Warranty Period	:	12 months from ex-factory date

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Adapters category](#):*

*Click to view products by [GP Batteries manufacturer](#):*

Other Similar products are found below :

[11904](#) [86-208-1-22](#) [13905](#) [86-207-1-22](#) [13904](#) [51957](#) [K-KJ55MCD40E](#) [HT8G616](#) [11903](#) [EE UNIVERSAL CHARGER 57658101401](#)  
[EPA1205L](#) [PEAK POWER U813](#) [L3EFT-SLIMK4](#) [L3EFT-LUSHQ8](#) [L3EFT-LUSHBOX](#) [L3EFT-IMATER4](#) [L3EFT-IMATER2](#) [L3EFT-](#)  
[SODA](#) [L3EFT-PROC4](#) [L3EFT-LUCV2](#) [L3EFT-ELITEV4](#) [L3EFT-LUCV4](#) [GDPT P2012-L2](#) [GDPT G600-168030](#) [BG21](#) [BM6018](#) [BM200-](#)  
[05](#) [PCM-L03-D142](#) [PCM-L08-D142](#) [PCM-L07-D142](#) [PCM-L04-D142](#) [POLOLU MICROSD ADAPTER](#) [GROVE CAPE FOR](#)  
[BEAGLEBONE](#) [GROVE BREAKOUT FOR LINKIT SMART 7688 DUO](#) [RBFN-EU-SEN-BMT-12](#) [9546](#) [9755](#) [9983](#) [51955](#) [51956](#) [51958](#)  
[51959](#) [52479](#) [52480](#) [52481](#) [I2C HUB](#) [DUAL MAX14870 MOTOR DRIVER SHIELD](#) [6PRO122420](#) [AB-12.100/ST8VA](#) [B631-2B1](#)