

CoolGaN™ G5

CoolGaN™ Transistor 650 V G5

Infineon’s CoolGaN™ is a highly efficient gallium nitride (GaN) transistor designed for power conversion at 650 V. It enables higher power density, supports reduced system BOM cost, and facilitates miniaturized form factors. Produced using 200 mm (8 inch) wafer technology and fully automated production lines, it features narrow production tolerances and the highest product quality. This makes it suitable for a wide range of applications, from consumer electronics to industrial applications.

Features

- Enhancement mode transistor
- Ultra-fast switching
- No reverse-recovery charge
- Capable of reverse conduction
- Low gate and output charge
- Superior commutation ruggedness
- 2 kV HBM ESD standards

Benefits

- Normally OFF transistor technology ensures safe operation
- Enables rapid and precise power delivery control
- Improves system efficiency and reliability
- Ensures robust performance under challenging conditions

These features collectively make CoolGaN™ a game-changer in the realm of power conversion, offering a compelling combination of efficiency, compactness, and reliability.

Potential applications

Industrial, telecom, datacenter SMPS based on half-bridge hard and soft switching topologies such as totem pole PFC and high frequency LLC, as well as charger and adapter.

Product validation

Fully qualified according to JEDEC for Industrial Applications

Table 1 Key performance parameters

Parameter	Value	Unit
$V_{DS,max}$	650	V
$V_{DS,trans-max}$	900	V
$R_{DS(on),max}$	100	mΩ
$Q_{g,typ}$	3.3	nC
$I_{D,pulse}$	42	A
$Q_{oss} @ 400 V$	25	nC
Q_{rr}	0	nC

Type / Ordering code	Package	Marking	Related links
IGLD65R080D2	PG-LSON-8	65R080D2	see Appendix A

PG-LSON-8








Table of contents

Description 1

Maximum ratings 3

Thermal characteristics 5

Electrical characteristics 6

Electrical characteristics diagrams 8

Test circuits 13

Package outlines 14

Appendix A 16

Revision history 17

Trademarks 17

Disclaimer 17

1 Maximum ratings

at $T_j = 25^\circ\text{C}$, unless otherwise specified. Stresses beyond max ratings may cause permanent damage to the device. For optimum lifetime and reliability, Infineon recommends operating conditions that do not continuously exceed 80% of the maximum ratings stated (unless otherwise explicitly stated). For further information, contact your local Infineon sales office.

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain source voltage, continuous	$V_{DS,max}$	-	-	650	V	$V_{GS} = 0\text{ V}$; derating recommendation according JEDEC JEP198
Leakage current at drain source transient voltage	$I_{DS,trans}$	-	-	8.6	mA	$V_{GS} = 0\text{ V}$; $V_{DS,trans} = 900\text{ V}$
Drain source voltage transient	$V_{DS,trans}$	-	-	900	V	<1% duty cycle; <1 μs ; 1 million pulses
Drain source voltage, pulsed	$V_{DS,pulsed}$	-	-	750 650	V	$T_j = 25^\circ\text{C}$; $V_{GS} \leq 0\text{ V}$; cumulated stress time $\leq 1\text{ h}$ $T_j = 125^\circ\text{C}$; $V_{GS} \leq 0\text{ V}$; cumulated stress time $\leq 1\text{ h}$
Switching surge voltage, pulsed	$V_{DS,surge}$	-	-	750	V	DC bus voltage = 700 V; turn off $V_{DS,pulse} = 750\text{ V}$; turn on $I_{D,pulse} = 19\text{ A}$; $T_j = 105^\circ\text{C}$; $f \leq 100\text{ kHz}$; $t \leq 100\text{ s}$ (10 million pulses)
Continuous current, drain source ¹⁾	I_D	-	-	18	A	$T_C = 25^\circ\text{C}$; $T_j = T_{j,max}$
Pulsed current, drain source	$I_{D,pulse}$	-42 -25	-	42 25	A	$T_j = 25^\circ\text{C}$; $I_G = 18\text{ mA}$; See Diagram 3, 5 $T_j = 125^\circ\text{C}$; $I_G = 18\text{ mA}$; See Diagram 4, 6
Gate current, continuous ²⁾	$I_{G,avg}$	-	-	14	mA	$T_j = -55^\circ\text{C}$ to $T_j = 150^\circ\text{C}$; See Table 9
Gate current, pulsed ²⁾	$I_{G,pulsed}$	-1.4	-	1.4	A	$T_j = -55^\circ\text{C}$ to $T_j = 150^\circ\text{C}$; $t_{pulse} = 50\text{ ns}$; $f = 100\text{ kHz}$; See Table 9
Gate source voltage, continuous ²⁾	V_{GS}	-10	-	-	V	$T_j = -55^\circ\text{C}$ to $T_j = 150^\circ\text{C}$; See Diagram 12
Gate source voltage, pulsed ²⁾	$V_{GS,pulse}$	-25	-	-	V	$T_j = -55^\circ\text{C}$ to $T_j = 150^\circ\text{C}$; $t_{pulse} = 50\text{ ns}$; $f = 100\text{ kHz}$; open drain
Power dissipation	P_{tot}	-	-	68	W	$T_C = 25^\circ\text{C}$
Operating junction temperature	T_j	-55	-	150	$^\circ\text{C}$	-
Storage temperature	T_{stg}	-55	-	150	$^\circ\text{C}$	Max shelf life depends on storage conditions
Drain-source voltage slew-rate	dv/dt	-	-	200	V/ns	-

- 1) Limited by $T_{j,max}$. Maximum duty cycle $D = 0.75$
- 2) We recommend using an advanced driving technique to optimize the device performance. Please see gate drive application note for more details.

2 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case	R_{thJC}	-	-	1.9	°C/W	-
Thermal resistance, junction - ambient	R_{thJA}	-	-	130	°C/W	Device on PCB, minimum footprint
Thermal resistance, junction - ambient for SMD version	R_{thJA}	-	-	67	°C/W	Device on 40 mm*40 mm*1.5 mm epoxy PCB FR4 with 6 cm ² (one layer, 70 µm thickness) copper area for tab (source) connection and cooling. PCB is vertical without air stream cooling.
Soldering temperature	T_{sold}	-	-	260	°C	MSL3, wave & reflow soldering allowed

3 Electrical characteristics

at $T_j=25^\circ\text{C}$, unless specified otherwise

Table 4 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(th)}$	0.9 -	1.2 1	1.6 -	V	$I_{DS}=1.8\text{ mA}$; $V_{DS}=10\text{ V}$; $T_j=25^\circ\text{C}$ $I_{DS}=1.8\text{ mA}$; $V_{DS}=10\text{ V}$; $T_j=150^\circ\text{C}$
Gate-Source reverse clamping voltage	$V_{GS, clamp}$	-	-	-8	V	$I_{GS}=-1\text{ mA}$
Drain-Source leakage current	I_{DSS}	-	0.7 14	70 -	μA	$V_{DS}=650\text{ V}$; $V_{GS}=0\text{ V}$; $T_j=25^\circ\text{C}$ $V_{DS}=650\text{ V}$; $V_{GS}=0\text{ V}$; $T_j=150^\circ\text{C}$
Drain-Source on-state resistance	$R_{DS(on)}$	-	0.080 0.170	0.100 -	Ω	$I_G=18\text{ mA}$; $I_D=5.5\text{ A}$; $T_j=25^\circ\text{C}$ $I_G=18\text{ mA}$; $I_D=5.5\text{ A}$; $T_j=150^\circ\text{C}$
Gate resistance	$R_{G,int}$	-	1.0	-	Ω	LCR impedance measurement; $f=f_{res}$, open drain;

Table 5 Dynamic characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	240	-	pF	$V_{GS}=0\text{ V}$; $V_{DS}=400\text{ V}$; $f=1\text{ MHz}$
Output capacitance	C_{oss}	-	40	-	pF	
Reverse transfer capacitance	C_{rss}	-	0.54	-	pF	
Effective output capacitance, time related ³⁾	$C_{o(tr)}$	-	62	-	pF	$V_{GS}=0\text{ V}$; $V_{DS}=0\text{ to }400\text{ V}$; $I_D=\text{const}$
Effective output capacitance, energy related ⁴⁾	$C_{o(er)}$	-	45	-	pF	$V_{DS}=0\text{ to }400\text{ V}$
Output charge	Q_{oss}	-	25	-	nC	
Coss stored energy	E_{oss}	-	3.6	-	μJ	
Turn-on delay time	$t_{d(on)}$	-	8	-	ns	$I_D=5.5\text{ A}$; $R_{ON}=8.2\text{ Ohm}$; $R_{OFF}=8.2\text{ Ohm}$; $R_{SS}=470\text{ Ohm}$; $C_C=2.2\text{ nF}$; $V_{DRV}=12\text{ V}$; see Table 8
Turn-off delay time	$t_{d(off)}$	-	11	-	ns	
Rise time	t_r	-	8	-	ns	
Fall time	t_f	-	17	-	ns	

³⁾ $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 400 V

⁴⁾ $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 400 V

Table 6 Gate charge characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate charge	Q_G	-	3.3	-	nC	$V_{GS}=0\text{ to }3\text{ V}$; $V_{DS}=400\text{ V}$; $I_D=5.5\text{ A}$

Table 7 Reverse conduction characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Source-Drain reverse voltage	V_{SD}	-	2.0	2.4	V	$V_{GS}=0\text{ V}; I_{SD}=5.5\text{ A}$
Pulsed current, reverse	$I_{SD,pulse}$	-	-	42	A	$I_G=18\text{ mA}$
Reverse recovery charge ⁵⁾	Q_{rr}	-	0	-	nC	$I_{SD}=5.5\text{ A}; V_{DS}=400\text{ V}$

⁵⁾ Excluding Q_{oss}

4 Electrical characteristics diagrams



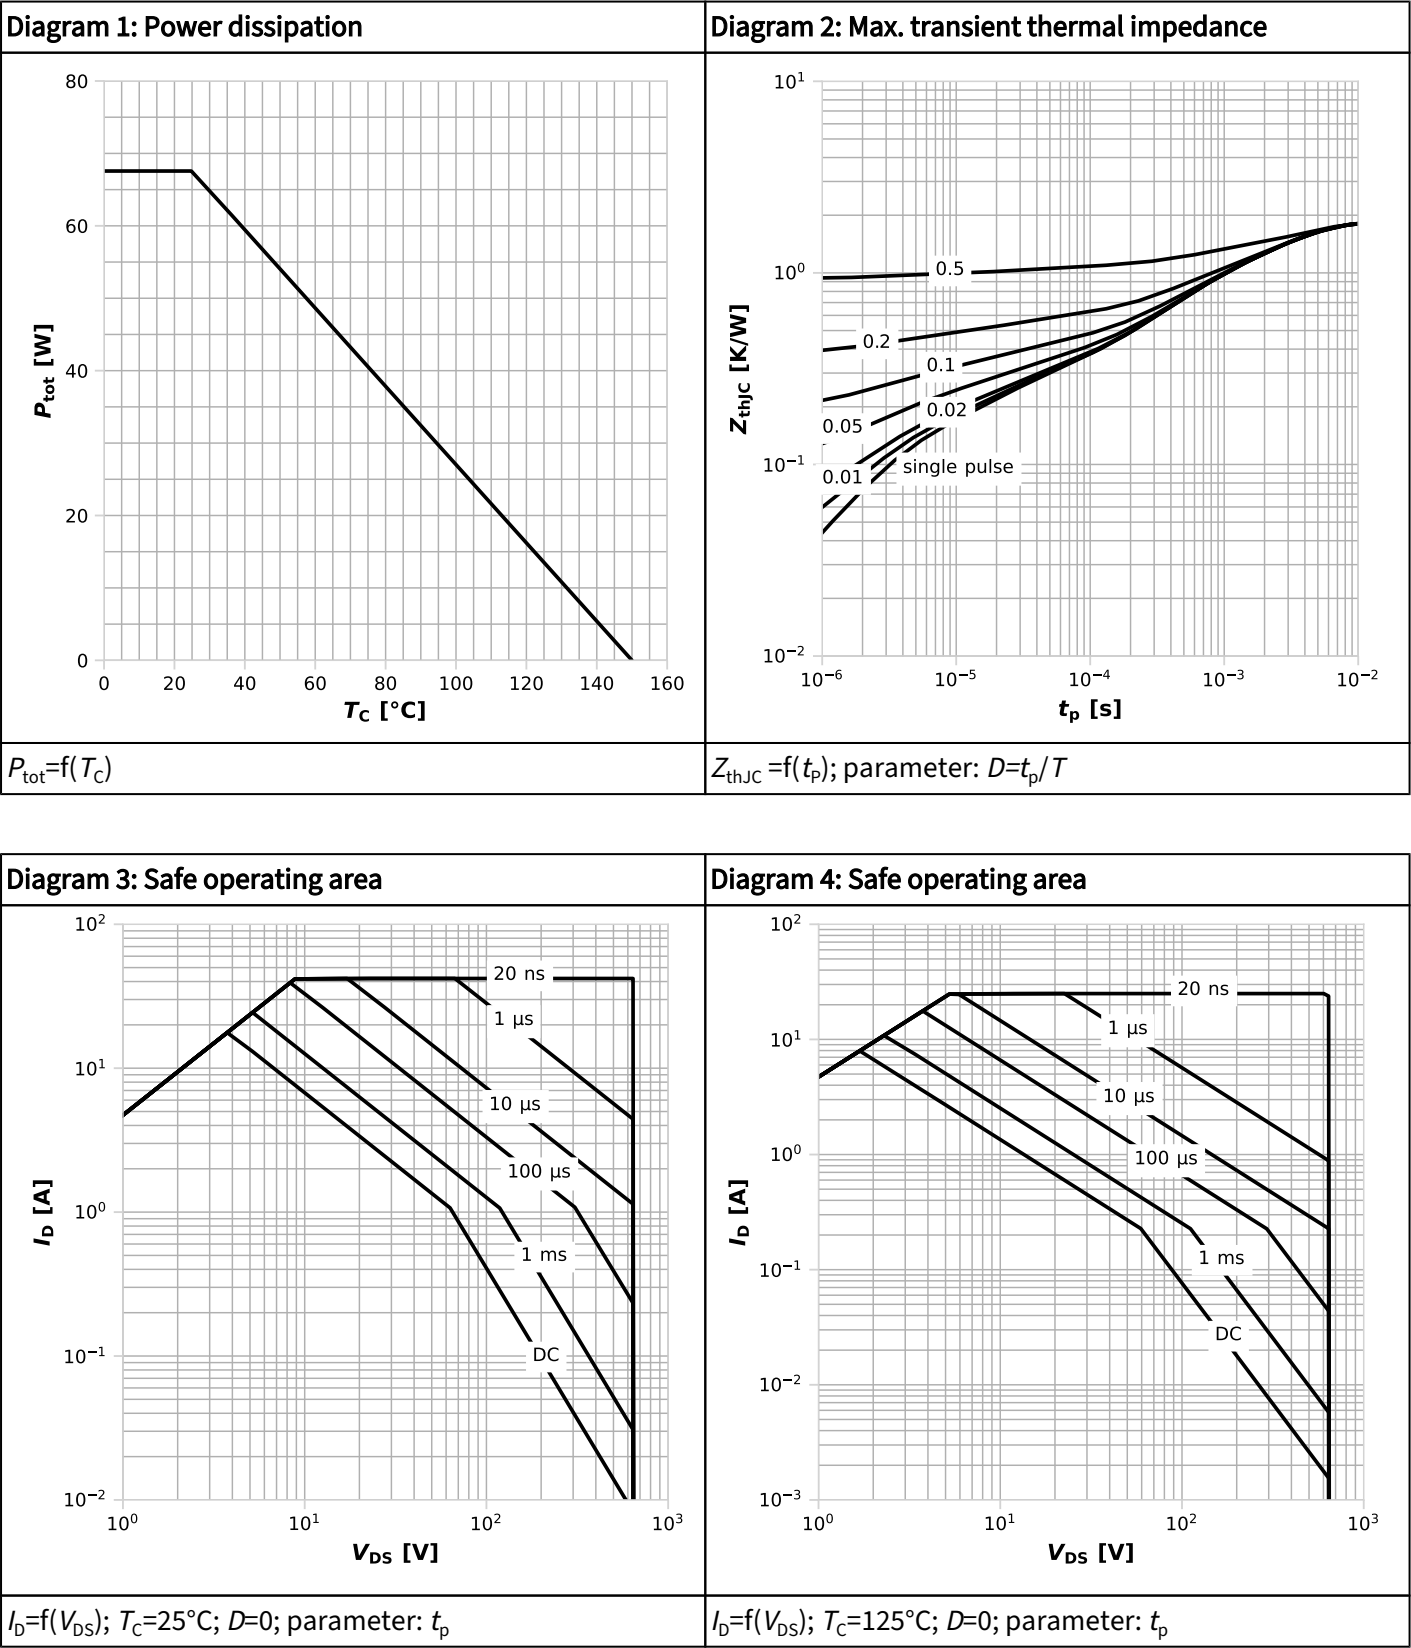


Diagram 5: Repetitive safe operating area

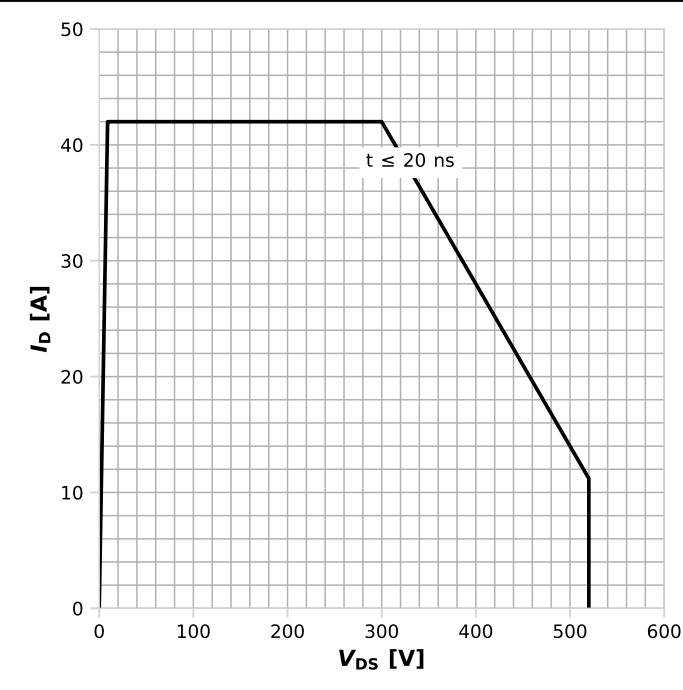


$I_D=f(V_{DS})$; $T_c=25^\circ\text{C}$; $T_j \leq 150^\circ\text{C}$; parameter: t_p

Diagram 6: Repetitive safe operating area

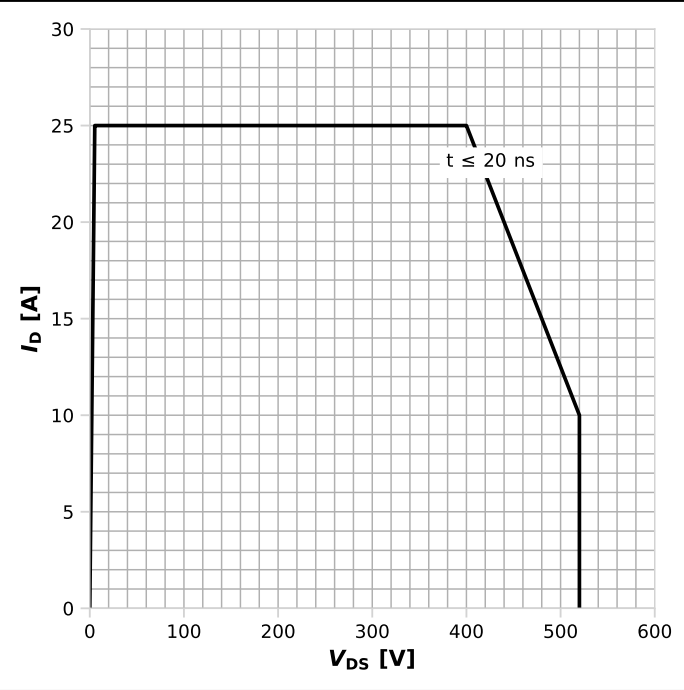


$I_D=f(V_{DS})$; $T_c=125^\circ\text{C}$; $T_j \leq 150^\circ\text{C}$; parameter: t_p

Diagram 7: Typ. output characteristics

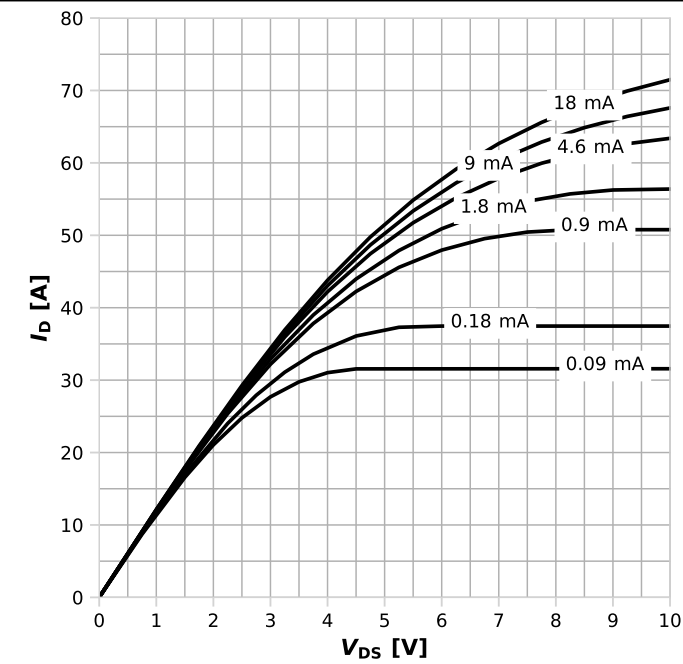

$I_D=f(V_{DS})$; $T_j=25^\circ\text{C}$; parameter: I_{GS}

Diagram 8: Typ. output characteristics

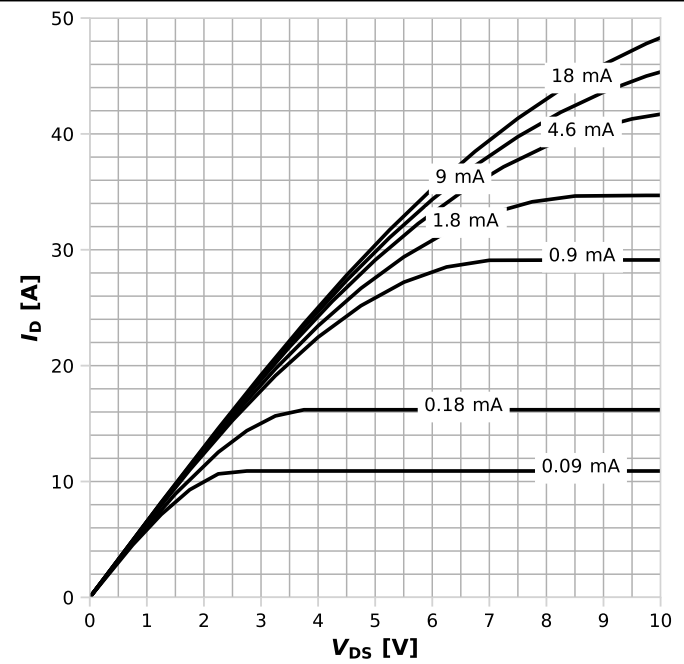

$I_D=f(V_{DS})$; $T_j=125^\circ\text{C}$; parameter: I_{GS}



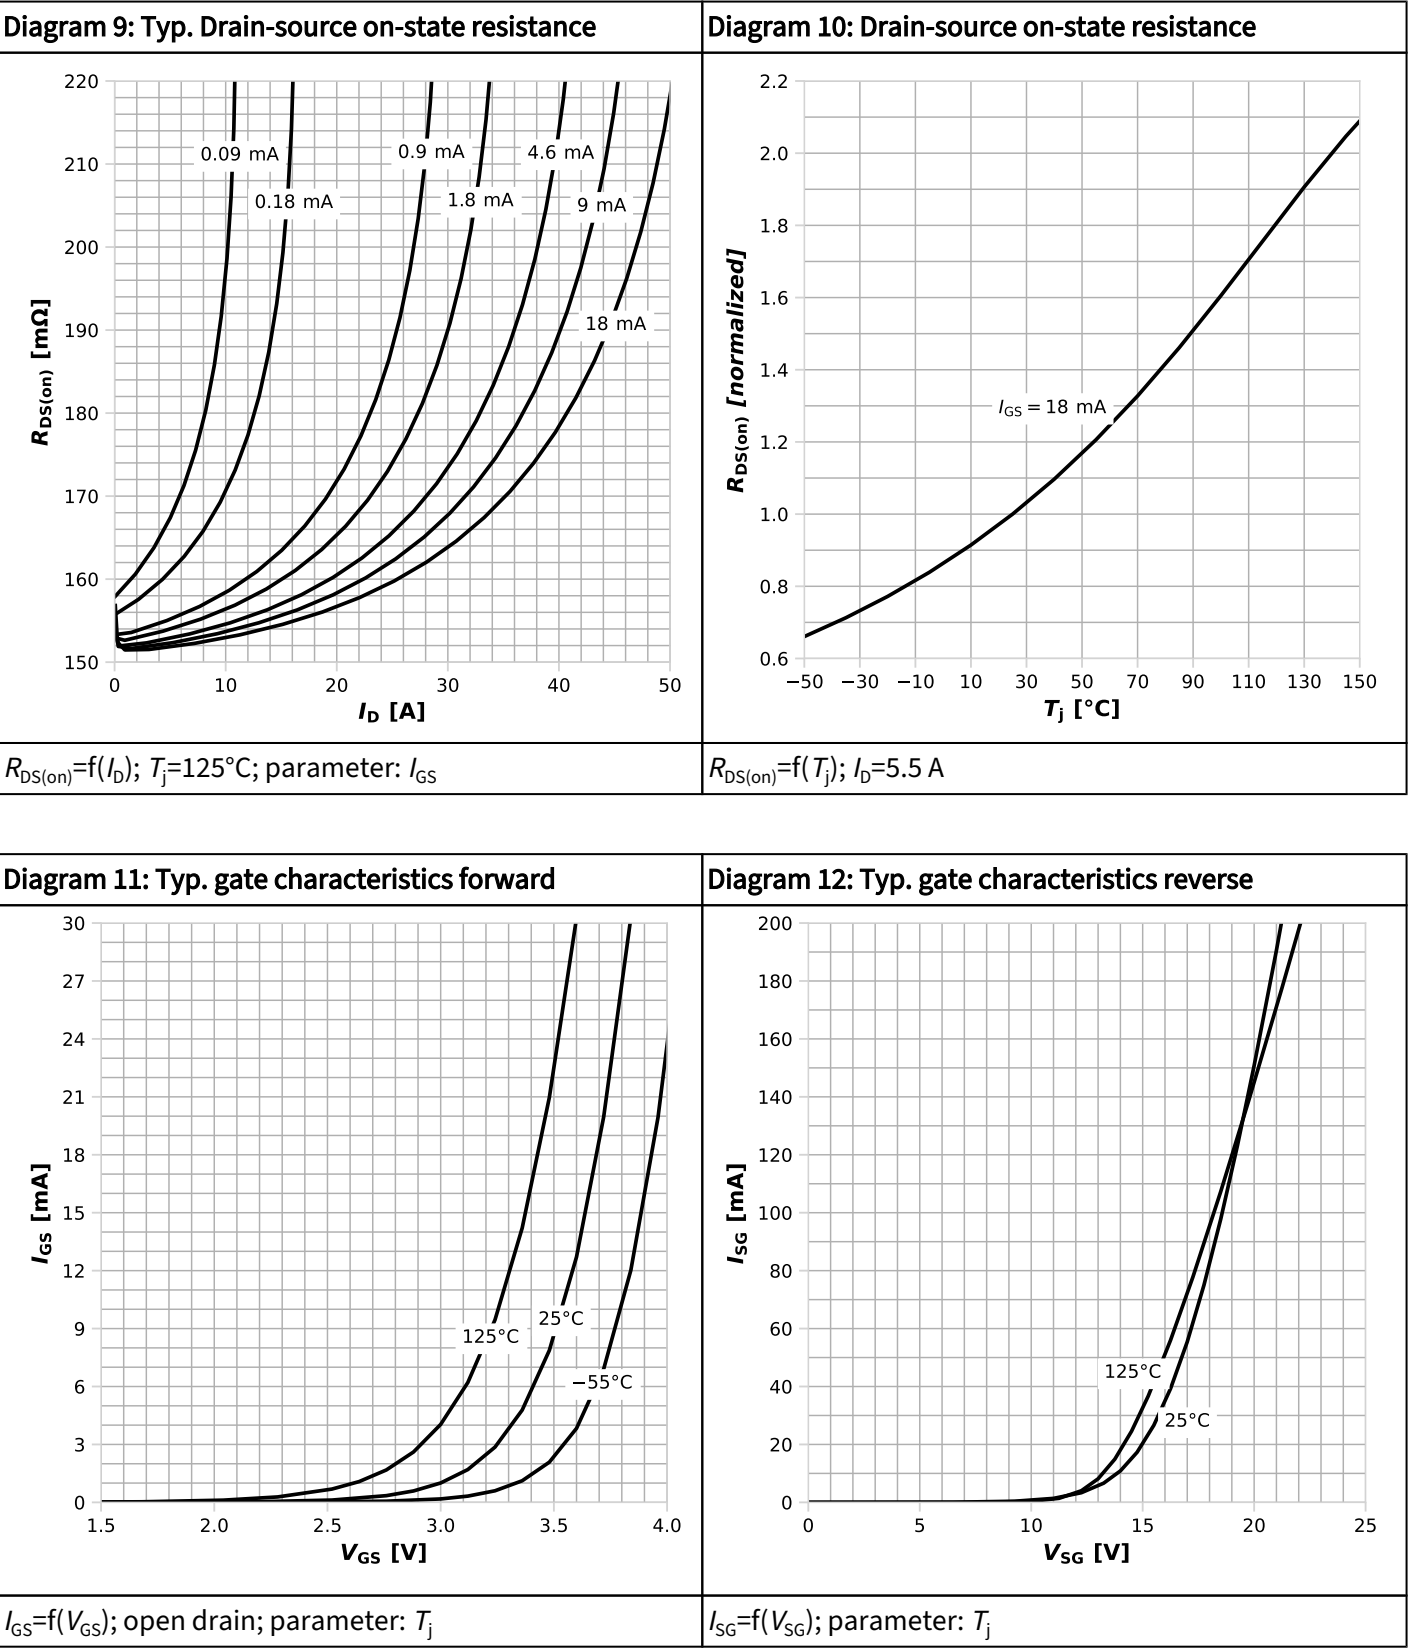


Diagram 13: Typ. transfer characteristics

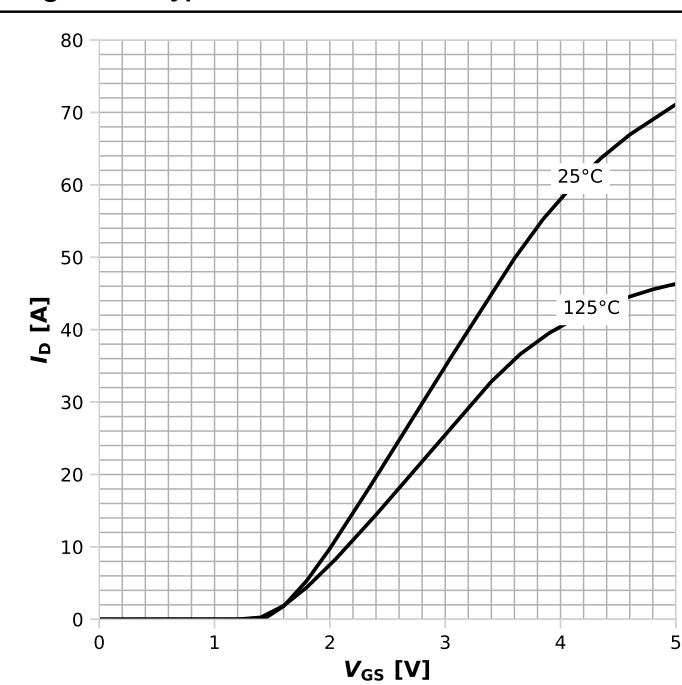


$I_D = f(V_{GS})$; $V_{DS}=8\text{V}$; parameter: T_j

Diagram 14: Typ. transfer gate current characteristic

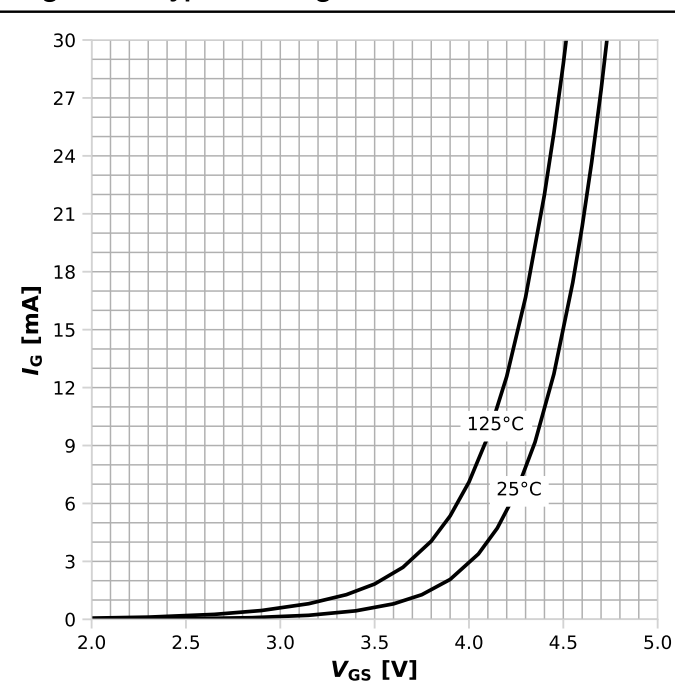


$I_G = f(V_{GS})$; $V_{DS}=8\text{V}$; parameter: T_j

Diagram 15: Typ. channel reverse characteristics

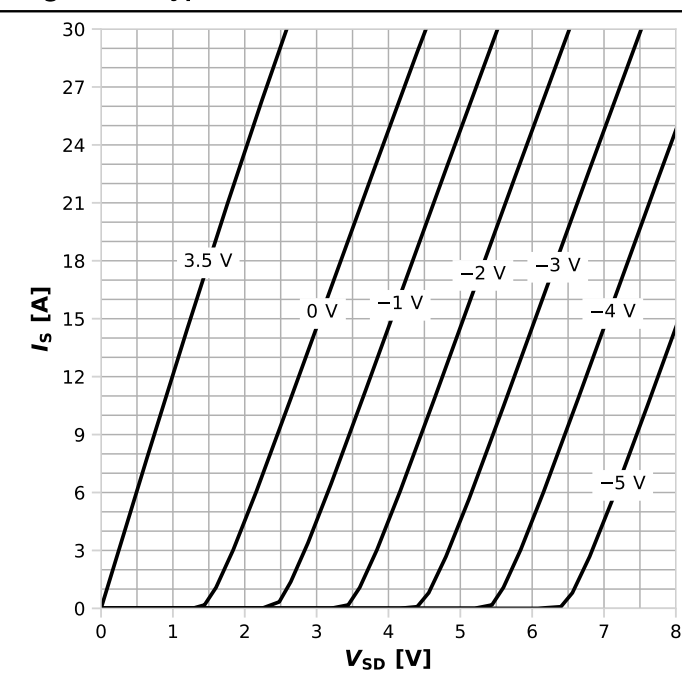


$I_S = f(V_{SD})$; $T_j=25^\circ\text{C}$; parameter: V_{GS}

Diagram 16: Typ. channel reverse characteristics

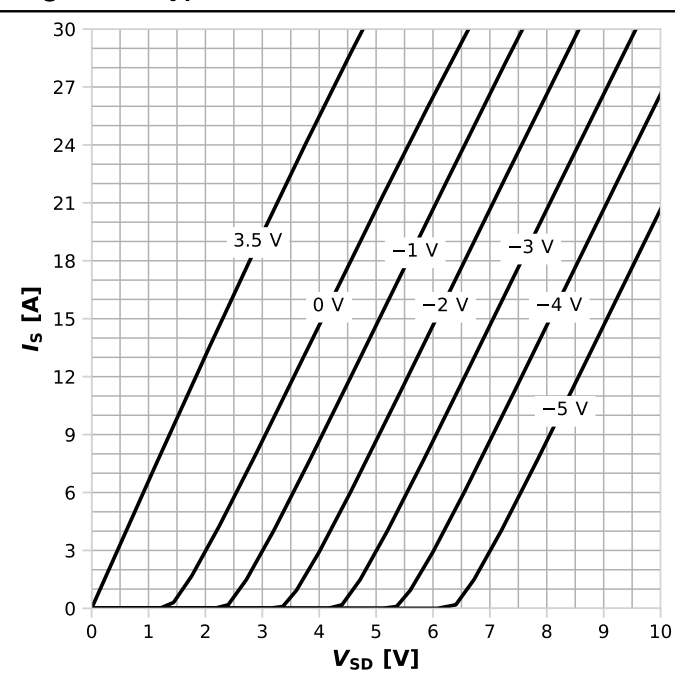


$I_S = f(V_{SD})$; $T_j=125^\circ\text{C}$; parameter: V_{GS}

Diagram 17 Typ. gate charge

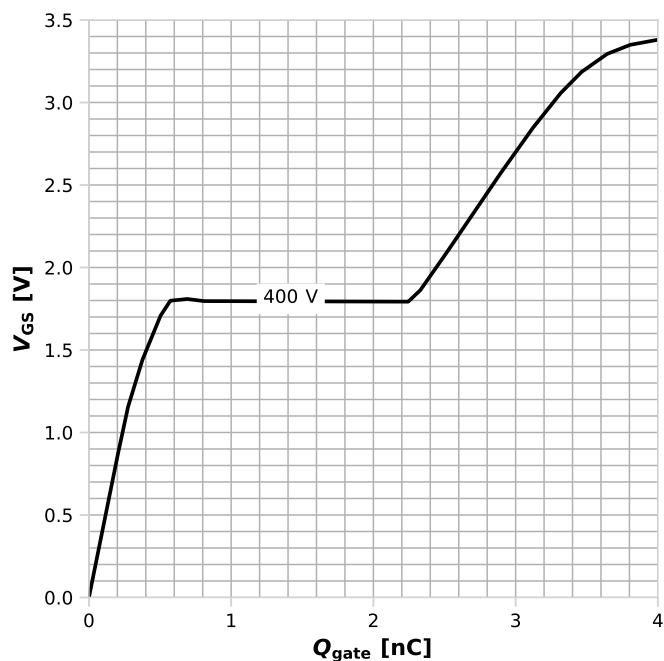


$V_{GS}=f(Q_{gate})$; $I_D=5.5$ A pulsed; $I_G=4.5$ mA; parameter: V_{DD}

Diagram 18: Typ. capacitances

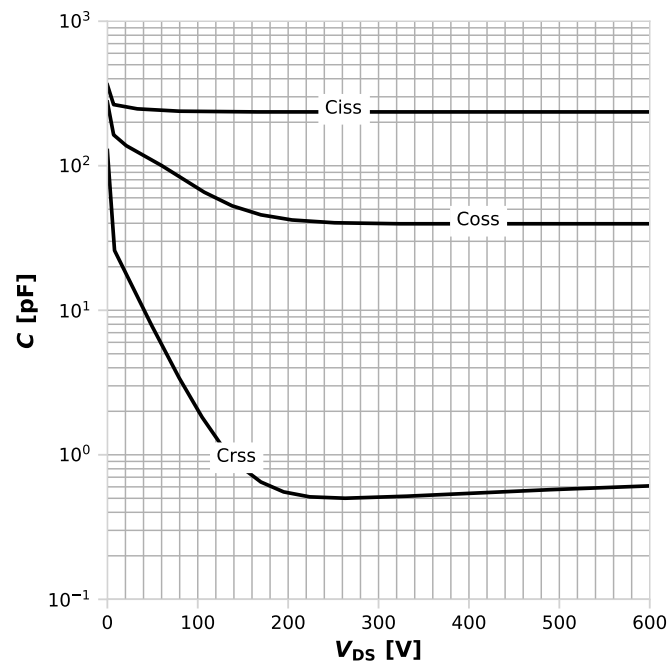


$C=f(V_{DS})$; $V_{GS}=0$ V

Diagram 19: Typ. output charge

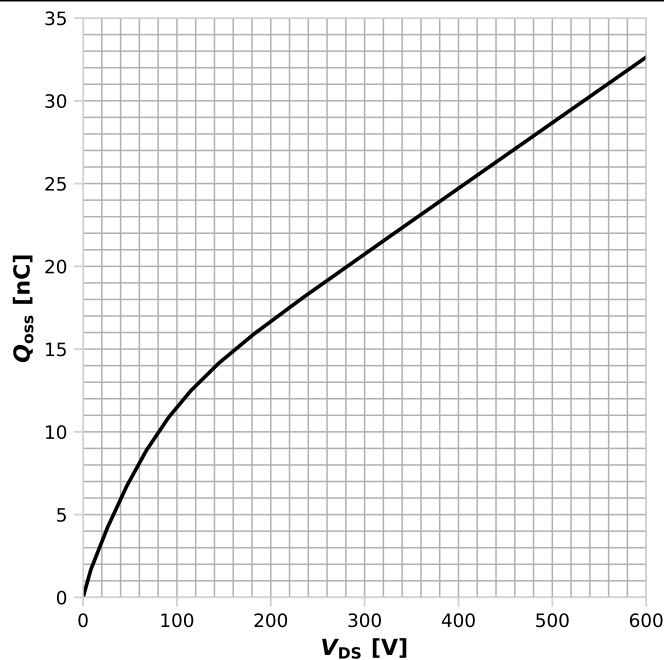

$Q_{oss}=f(V_{DS})$

Diagram 20: Typ. Coss stored energy

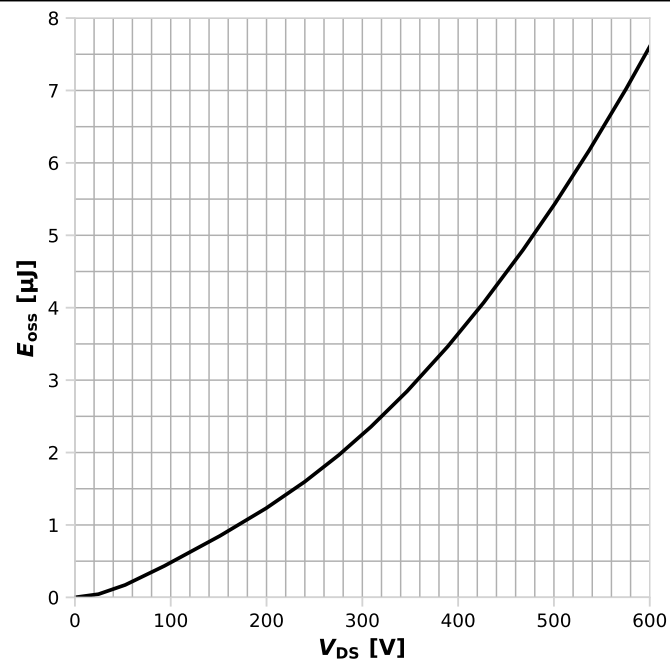

$E_{oss}=f(V_{DS})$

5 Test circuits

Table 8 Reverse channel characteristics test



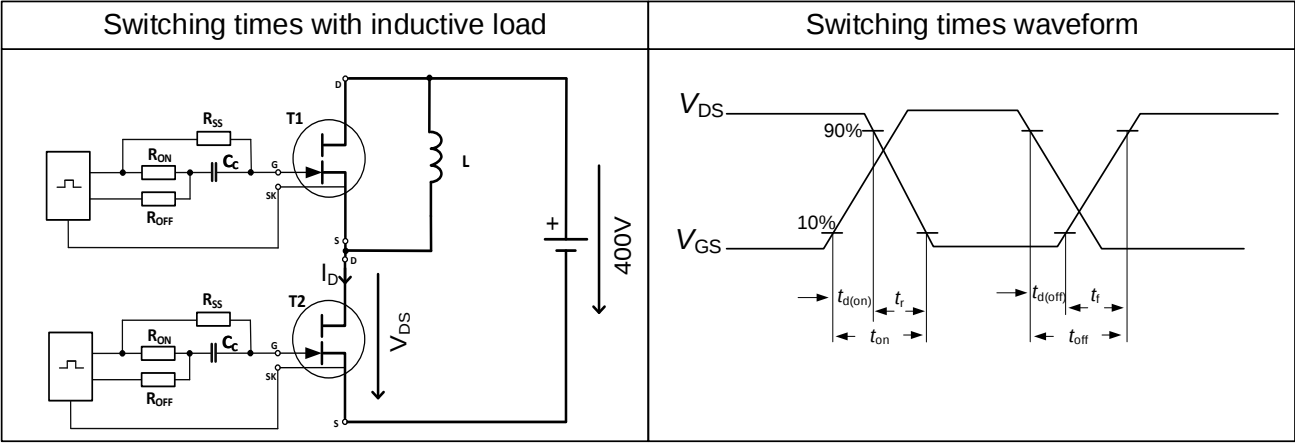


Table 9 Gate current switching waveform

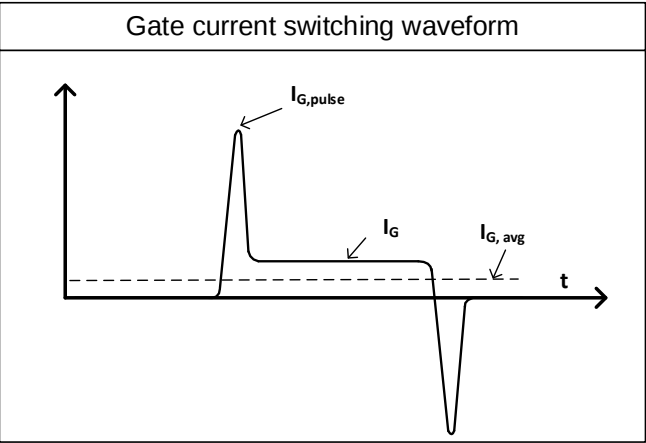

6 Package outlines

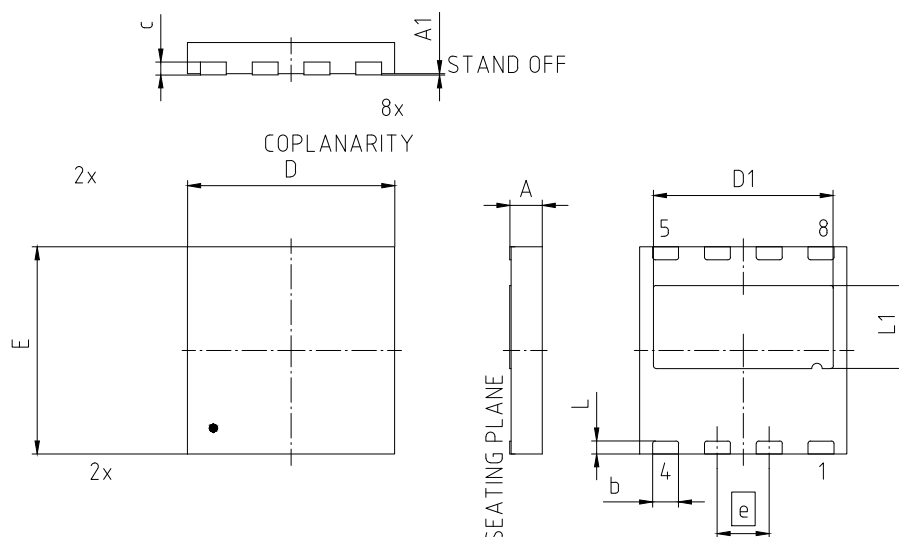

PACKAGE - GROUP NUMBER: PG-LSON-8-U01		
DIMENSIONS	MILLIMETERS	
	MIN.	MAX.
A	-	1.35
A1	-	0.05
b	0.95	1.05
c	0.50	
D	7.90	8.10
D1	6.84	7.04
E	7.90	8.10
e	2.00	
L	0.45	0.55
L1	3.10	3.30

Figure 1 Outline PG-LSON-8, dimensions in mm

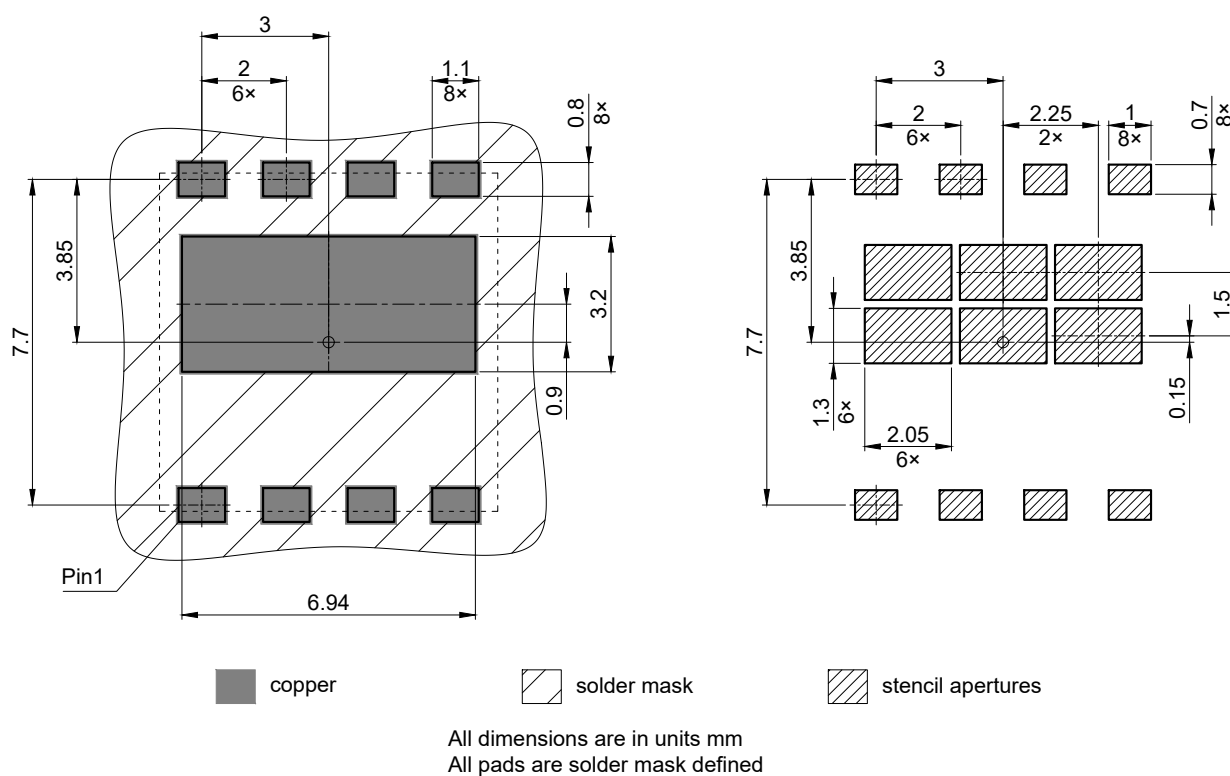


Figure 2 Footprint drawing PG-LSON-8, dimensions in mm

7 Appendix A

Table 10 **Related links**

- [CoolGaN™ GaN 650 V webpage](#)
- [CoolGaN™ GaN 650 V reliability white paper](#)
- [CoolGaN™ GaN 650 V gate driver application note](#)
- [CoolGaN™ GaN 650 V applications information](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [GaN FETs](#) category:

Click to view products by [Infineon](#) manufacturer:

Other Similar products are found below :

[CID10N65D](#) [CID18N65D](#) [CID45N65MD](#) [CID10N65E3](#) [EPC8010](#) [EPC8009](#) [EPC8004](#) [EPC2014C](#) [CLP24H4S30PXY](#) [CCSPG1510N TR](#)
[PBFREE](#) [CCSPG1560N TR PBFREE](#) [CDF56G7032N TR13 PBFREE](#) [CDFG6558N TR13 PBFREE](#) [GRF0010](#) [GRF0020](#)
[IGB070S10S1XTMA1](#) [IGB110S101XTMA1](#) [IGB110S10S1XTMA1](#) [IGC019S06S1XTMA1](#) [IGC025S08S1XTMA1](#) [IGC033S101XTMA1](#)
[IGC033S10S1XTMA1](#) [IGC037S12S1XTMA1](#) [IGD70R140D2SAUMA1](#) [IGD70R200D2SAUMA1](#) [IGD70R270D2SAUMA1](#)
[IGD70R500D2SAUMA1](#) [IGI65D1414A3MSXUMA1](#) [IGL65R055D2XUMA1](#) [IGL65R080D2XUMA1](#) [IGL65R110D2XUMA1](#)
[IGL65R140D2XUMA1](#) [IGLD65R055D2AUMA1](#) [IGLD65R080D2AUMA1](#) [IGLD65R110D2AUMA1](#) [IGLD65R140D2AUMA1](#)
[IGLR65R140D2XUMA1](#) [IGLR65R200D2XUMA1](#) [IGLR65R270D2XUMA1](#) [IGLR70R140D2SXUMA1](#) [IGLR70R200D2SXUMA1](#)
[IGLR70R270D2SXUMA1](#) [IGLT65R035D2ATMA1](#) [IGLT65R045D2ATMA1](#) [IGLT65R110D2ATMA1](#) [IGOT65R025D2AUMA1](#)
[IGOT65R035D2AUMA1](#) [IGOT65R045D2AUMA1](#) [IGOT65R055D2AUMA1](#) [IGT65R025D2ATMA1](#)