

TDM22545D OptiMOS™

Dual Phase 140A Power Stage Module with Integrated Inductor

Features

- Integrated dual converters including two smart power stages, two inductors, and decoupling capacitors
- Infineon's latest smart power stages utilize OptiMOS™-6 MOSFETs
- Output DC current capability of 70 A per phase (Thermally managed)
- Output peak current capability of 160 A
- Input voltage (VIN) range of 4.25 V to 16 V
- On-chip MOSFET Current sensing and reporting at 5 μ A/A.
- 8mV / °C temperature analog output
- Output voltage range from 0.225 V up to 3 V at VIN = 12 V
- Operation up to 2 MHz
- VCC under voltage lockout (UVLO)
- Bootstrap under-voltage protection
- Auto-replenishment on bootstrap capacitors
- Over temperature protection and thermal shutdown
- Cycle-by-cycle over current Protection (OCP) and flag
- Compatible with 3.3 V tri-state PWM Input
- Body-Braking™ load transient support
- DEEP SLEEP mode for power saving via EN= low (32 μ A typ per phase)
- Lead free RoHS compliant package
- Small LGA package in 10 mm (length) x 9 mm (width) x 5 mm (height)

Potential applications

- Artificial Intelligence accelerators chips
- CPU Power
- FPGA Power
- Telcom/datacenter

Product validation

Qualified for industrial applications according to JESD47 and IPC9701

Description

- High frequency, compact DC-DC converters
- Voltage Regulators for CPUs, GPUs, FPGAs and DDR memory arrays
- Server, communication and artificial intelligence systems.

The TDM22545D dual OptiMOS™ Power Module co-packages two smart power stages, two power inductors, and decoupling capacitors to implement two independent synchronous buck converters into a small 10mm x 9mm x 5mm package. The package is optimized for PCB layout, heat transfer, driver/MOSFET control timing, and minimal switch node ringing. The smart power stage pairs optimized gate drivers and MOSFETs to enable higher efficiency at lower output voltages required by cutting edge CPU, GPU, FPGA and DDR memory designs.

The improved MOSFET current-mirror current-output sensing achieves superior current sense accuracy versus best-in-class controller-based Inductor DCR sense as well as MOSFET $R_{ds(on)}$ current sense methods.

Protections include IC temperature reporting and over temperature protection feature (OTP with thermal shutdown), cycle-by-cycle over current protection (OCP), control MOSFET short detection (HSS - High side short detection), and VCC under-voltage protection. The OptiMOS™ Power Module power stage also features "refreshing" of bootstrap capacitor to prevent the bootstrap capacitor from over-discharging.

Inductors are optimized for switching frequencies between 600 kHz to 1.2 MHz, which enables high performance transient response while maintaining industry leading efficiency.

Table of contents

Features 1

Potential applications 1

Product validation 1

Description 2

Table of contents 3

1 Ordering information 4

2 Package 5

3 Environmental Qualifications 6

Ordering information

1 Ordering information

Table 1 Ordering Information

Part Number	Temp Range	Package	Orderable Part Number
TDM22545D	-40 to 125°C	LG-MLGA-72-5 10 mm x 9 mm x 5 mm	TDM22545DXUMA1

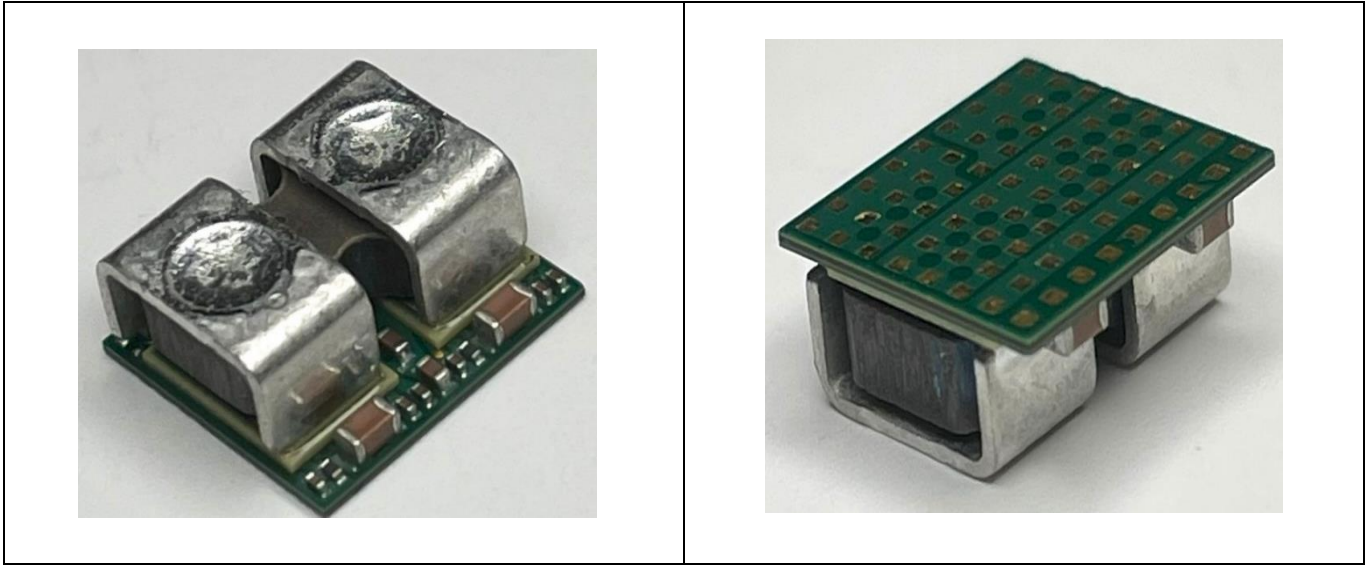


Figure 1 Picture of the Product, Top and Bottom Side

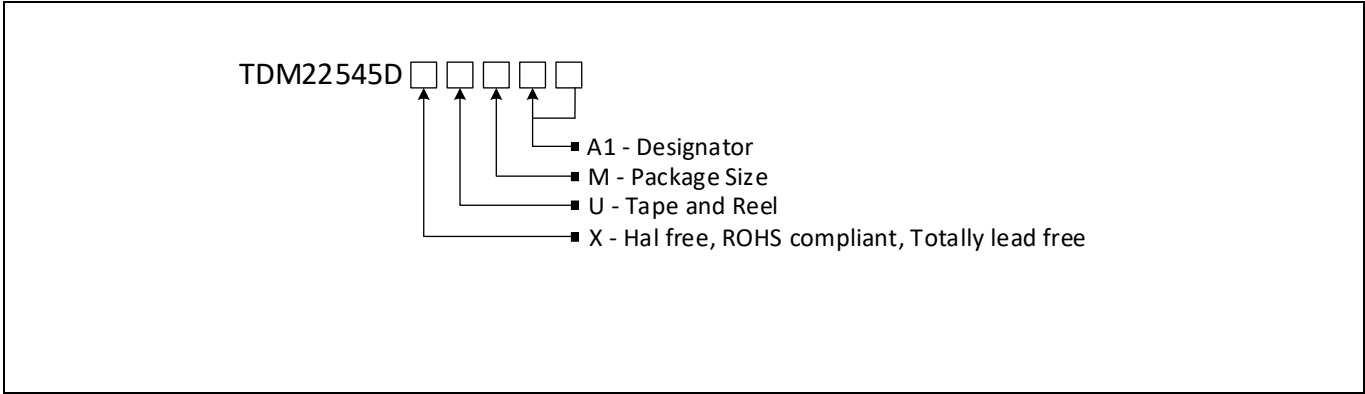


Figure 2 Part Number Configuration

Package

2 Package

This section includes marking, mechanical and packaging information for TDM22545D.

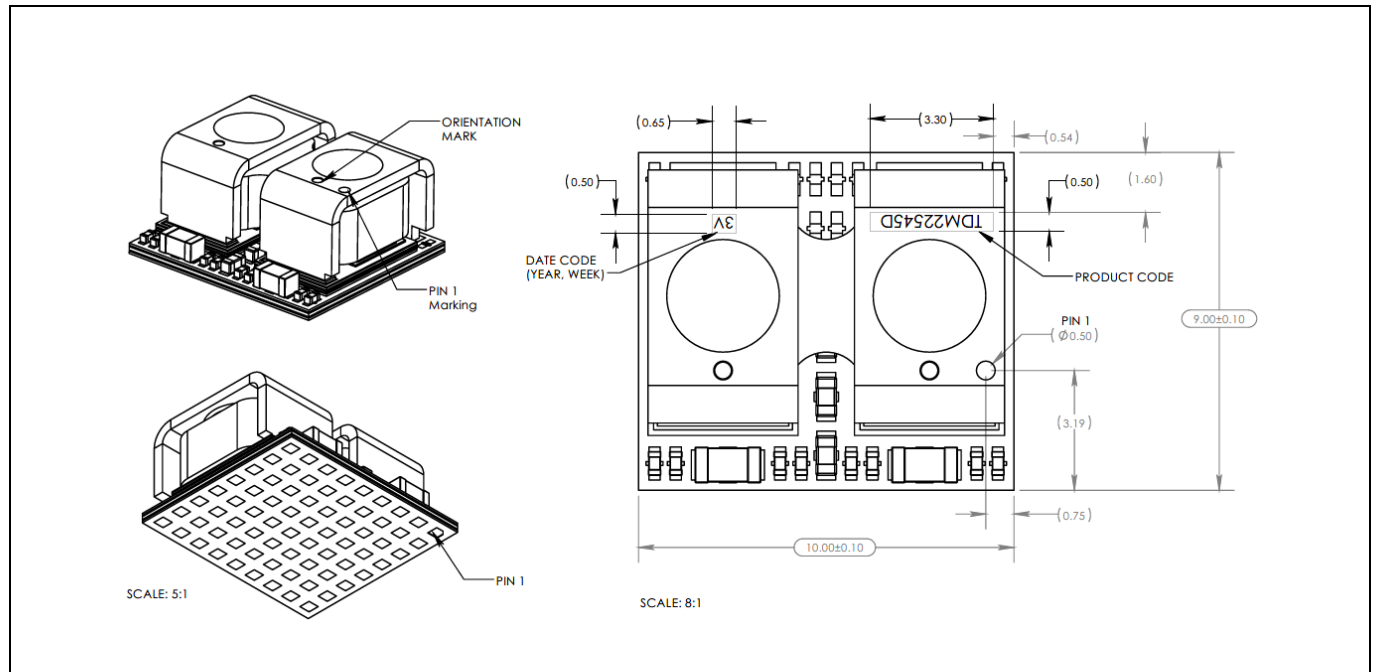


Figure 3 Package Marking

3 Environmental Qualifications

Table 2 Environmental Qualifications

Qualification Level		Industrial	
Moisture Sensitivity		9x10x5mm LG-MLGA-72-5 Package	JEDEC Level 3 @ 260 °C
ESD	[HBM] Human Body Model	ANSI/ESDA/JEDEC JS-001, Class 2 (2000V to <4000V)	
	[CDM] Charged Device Model	ANSI/ESDA/JEDEC JS-002, Class C3 (≥ 1000)	
RoHS Compliant		Yes	

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-05-29

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2024 Infineon Technologies AG.

All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

IMPORTANT NOTICE

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management Specialised - PMIC category:](#)

Click to view products by [Infineon manufacturer:](#)

Other Similar products are found below :

[FAN7710VN](#) [L5956](#) [LA5657H-N-TLM-E](#) [AS3729B-BWLM](#) [L5959](#) [LV56841PVD-XH](#) [S6AE102A0DGN1B200](#) [L9916](#) [L9915-CB](#)
[LPTM21L-1ABG100I](#) [FDMF5085](#) [WL2868C-20/TR](#) [TLE9263-3BQX](#) [TLE9263QX](#) [TEA2095T/1J](#) [RK805-2](#) [EG1615](#) [EG8026](#) [TC1017-](#)
[2.5VLTTR](#) [NCP81521MNTXG](#) [ACT88325VA135-T](#) [ISL91212AIIZ-TR5923](#) [RT5074AGQW](#) [RK817-5](#) [RK809-5](#) [RK808-B](#) [RK806-1](#)
[RK809-3](#) [SN1509006RHRLR](#) [TPS53623RSMR](#) [AXP2101](#) [L9916B](#) [STHV748SQ](#) [MFS2323BMBA0EP](#) [CS32G021K8U6](#) [TPA626-VR-S](#)
[MFS2613AMDHKAD](#) [SNXH150B95H3Q2F2PG-N](#) [MFS2303BMMA4EP](#) [MFS2401AVMAFES](#) [MPF5302AMMAAES](#)
[MPF5301AMMABES](#) [MPF9453AVMB1HN](#) [MPF5300AMMALES](#) [CPX200D](#) [MC34VR5100A1EP](#) [TP-1303](#) [TP-1305](#) [TP-1603](#) [TP-2305](#)