

High Frequency Ceramic Solutions


2.45GHz Impedance Matched Balun + Band Pass Filter: Optimized for Nordic's Chipsets: nRF51822-QFAA, P/N 2450BM14E0003
nRF51422-QFAA, nRF51822-QFAB, nRF51422-QFAB, nRF51822-QFAC, nRF51422-QFAC, nRF51802-QFAA

Detail Specification: 6/29/2016

Page 1 of 4

For the Full App Note and Layout Files, go to: www.johansontechnology.com/nordic

General Specifications	
Part Number	2450BM14E0003
Frequency (MHz)	2400 - 2500
Unbalanced Impedance	50 Ω (single ended)
Differential Balanced Impedance	Impedance matched to Nordic Semi nRF51822-QFAx, nRF51422-QFAX, and nRF51802-QFAA chipsets
Average Insertion Loss when connected to the nRF51XX chipset (Active OP)	0.9dB Typ. @25C, 1.5dB max. (-40 to +85C), 2.0dB (+85 to +105C)
Insertion Loss when component measured by itself (passive insertion loss)	2.1dB typ. @25C, 2.5dB max. (-40 to +85C), 3.0dB (+85 to 105C)
Attenuation Differential mode (dB):	
800-928 MHz	15 typ. @25°C 10 min.
1200-1500 MHz	14 typ. @25°C 10 min.
4800-5000MHz	35 typ. @25°C 20 min.
7200-7500MHz	21 typ. @25°C 18 min.
Attenuation Common mode (dB):	
4800-5000MHz	44 typ. @25°C 20 min.

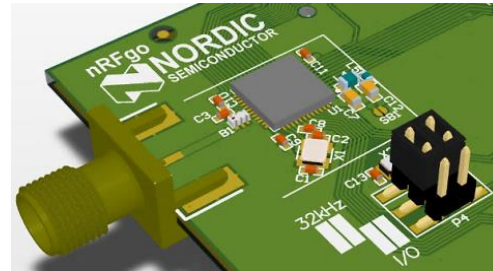


Return Loss (dB)	15 typ. 9.5 min.
Amplitude Difference	150 $\pm$ 15deg
Reel Quantity	4,000 pcs
Operating Temperature	-40 to +105°C
Storage Temperature	-40 to +85°C
Recommended Storage Conditions for unused product on T&R	+5 to +35°C, Humidity: 45-75%RH, 18 mos. Max
Power Capacity	1W max.(CW)

Part Number Explanation

P/N Suffix	Packaging Style	Bulk	Suffix = S	E.g.. 2450BM14E0003S
	Termination Style	T & R	Suffix = T	E.g.. 2450BM14E0003T
		100% Tin	Suffix = None	E.g.. 2450BM14E0003(T or S)

Mechanical Dimensions


	In	mm
L	0.063 $\pm$ 0.004	1.60 $\pm$ 0.10
W	0.031 $\pm$ 0.004	0.80 $\pm$ 0.10
T	0.024 $\pm$ 0.004	0.60 $\pm$ 0.10
a	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
b	0.008 $\pm$ 0.004/-0.006	0.20 $\pm$ 0.1/-0.15
c	0.006 $\pm$ 0.004	0.15 $\pm$ 0.10
g	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
p	0.020 $\pm$ 0.002	0.50 $\pm$ 0.05

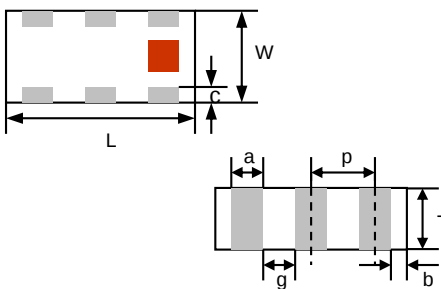

You can download layout files, schematics, output power measured results (App Note AN020), and s-parameters at: <http://johansontechnology.com/nordic>

Terminal Configuration

No.	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	DC Feed
6	GND



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver. 3.0

2016 Johanson Technology, Inc. All Rights Reserved


High Frequency Ceramic Solutions

2.45GHz Impedance Matched Balun + Band Pass Filter: Optimized for Nordic's Chipsets: nRF51822-QFAA, P/N 2450BM14E0003
nRF51422-QFAA, nRF51822-QFAB, nRF51422-QFAB, nRF51822-QFAC, nRF51422-QFAC, nRF51802-QFAA

Detail Specification: 6/29/2016

Page 2 of 4


Mounting Considerations

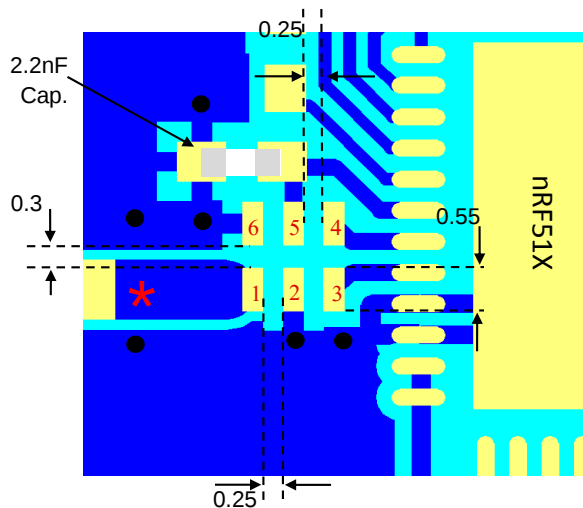

*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Do you need the layout/gerber files of the above? Go to: www.johansontechnology.com/nordic or send us a message to review your layout at: www.johansontechnology.com/component/ask-a-question

Solo-Component Characterization Scheme

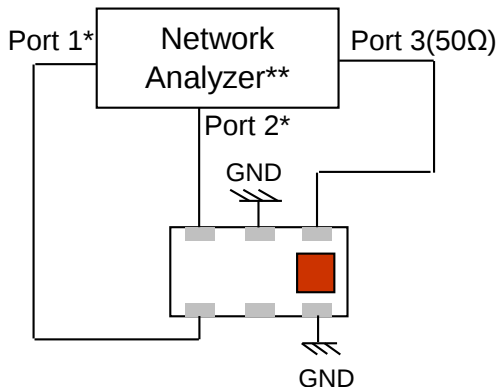

Port 3: Unbalanced Port
Ports 1 and 2: Balanced Port
 $IL = S_{ds21}$, $Att_{DM} = S_{ds21}$, $Att_{CM} = S_{cs21}$
 $RL = S_{ss11}$
 $Amp_balance = dB(S(1,3)/S(2,3))$
 $Phase_balance = Phase(S(1,3)/S(2,3))$

*Impedance for ports 1 and 2
= Conjugate to Balanced Impedance/2
**E5071B from Agilent

You can download layout files, schematics, output power measured results (App Note AN020), and s-parameters at:
<http://johansontechnology.com/nordic>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 3.0

www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2016 Johanson Technology, Inc. All Rights Reserved


High Frequency Ceramic Solutions

2.45GHz Impedance Matched Balun + Band Pass Filter: Optimized for Nordic's Chipsets: nRF51822-QFAA, P/N 2450BM14E0003
nRF51422-QFAA, nRF51822-QFAB, nRF51422-QFAB, nRF51822-QFAC, nRF51422-QFAC, nRF51802-QFAA

Detail Specification: 6/29/2016

Page 3 of 4

Typical Electrical Characteristics (T=25°C)

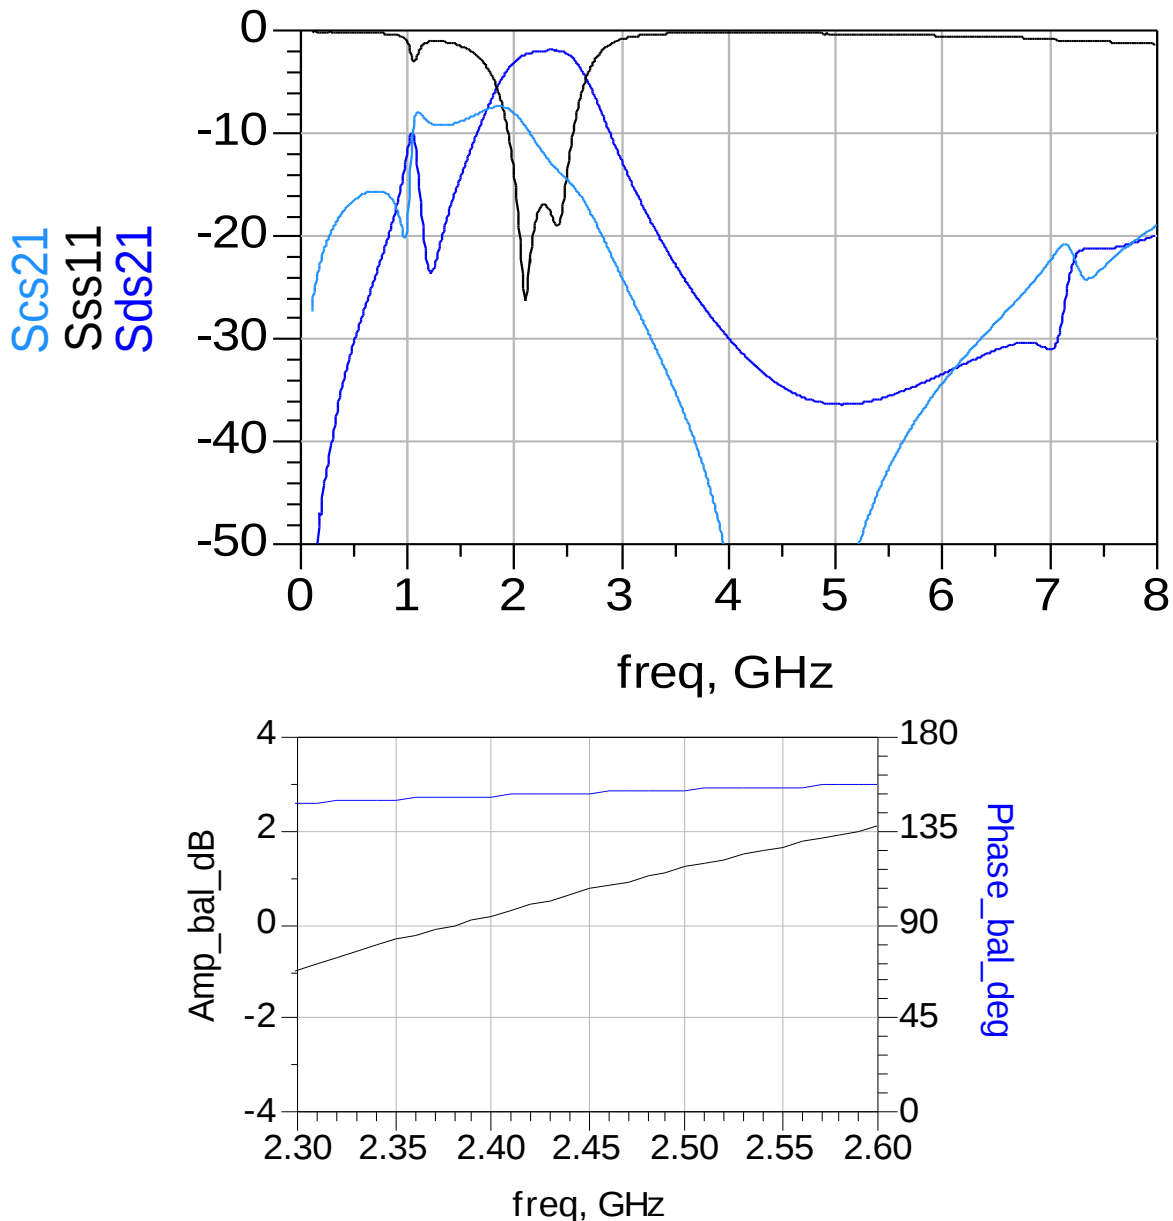

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 3.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2016 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45GHz Impedance Matched Balun + Band Pass Filter: Optimized for Nordic's Chipsets: nRF51822-QFAA, P/N 2450BM14E0003
nRF51422-QFAA, nRF51822-QFAB, nRF51422-QFAB, nRF51822-QFAC, nRF51422-QFAC, nRF51802-QFAA

Detail Specification: 6/29/2016

Page 4 of 4

Application Notes, Layout Files, and more

www.johansontechnology.com/nordic

Packaging information

<http://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

<http://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<http://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance


<http://www.johansontechnology.com/rohs-compliance>

Antenna layout and tuning techniques

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

<http://www.johansontechnology.com/ipc-antenna-services>



Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 3.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2016 Johanson Technology, Inc. All Rights Reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)