




2.45 GHz Impedance Matched Balun-Filter for Texas Instruments CC253X, CC254X, CC257X, CC852X, and CC853X Chipset Families

- Operating temperature up to 125°C (non-automotive)
- SMD, EIA 0805
- Designed for use with Texas Instruments chipset part numbers:
 - CC2540, CC2531, CC2533, CC2538
 - CC2540, CC2541, CC2543, CC2544
 - CC2570, CC2571
 - CC8520, CC8521
 - CC8530, CC8531

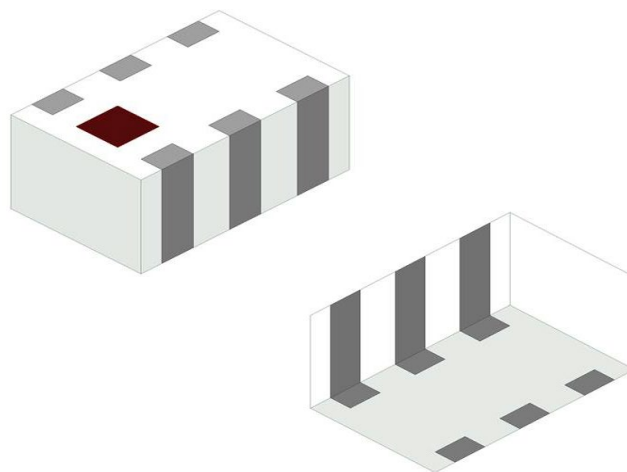

General Specifications¹

Passband Frequency (MHz)	2400 – 2500
Unbalanced Impedance (Ω)	50
Balanced Differential Impedance (Ω)	Impedance match to TI CC253X, CC254X, CC257X, CC852X and CC853X chipsets
Insertion Loss (dB)	1.5 Max. (-40°C to +85°C) 1.7 Max. (-40°C to +125°C)
Return Loss (dB)	9.5 Min.
Phase Difference (degree)	180 $\pm$ 15
Differential Mode Attenuation	
Frequency Range (MHz)	1000
Attenuation (dB)	12 Min.
Frequency Range (MHz)	4800 – 5000
Attenuation (dB)	18 Min.
Frequency Range (MHz)	7200 – 7500
Attenuation (dB)	20 Min.


¹ Typical value represents average measurement at 25°C. Min./Max. values represent measurements within the operating temperature specification unless stated otherwise.

Maximum Ratings


Power Capacity (W)	2 Max. (CW)
Operating Temperature (°C)	-40 to +125
Recommended Storage Conditions post-installation (°C)	-40 to +125
Recommended Storage Conditions and Period for Unused T&R Product	45% - 75% RH
	+5 to +35 °C
	18 Months Max.

	Inches			Millimeters		
L	0.079	±	0.004	2.00	±	0.10
W	0.049	±	0.004	1.25	±	0.10
T	0.028	±	0.004	0.70	±	0.10
a	0.012	±	0.004	0.30	±	0.10
b	0.008	±	0.004	0.20	±	0.10
c	0.012	+0.004/-0.008		0.30	+0.10/-0.20	
g	0.014	±	0.004	0.35	±	0.10
p	0.026	±	0.002	0.65	±	0.05

Bottom view

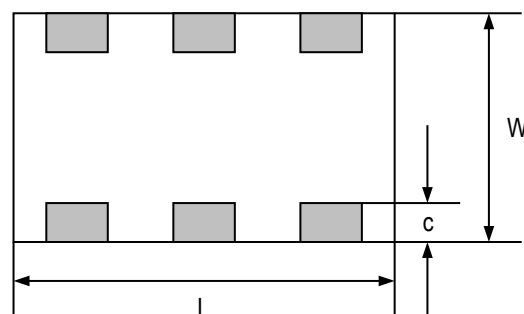


Side view

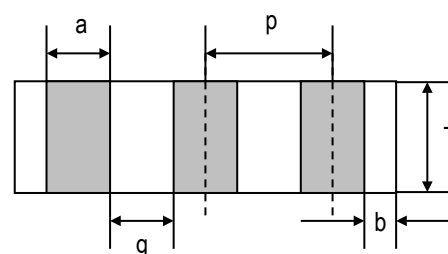


Terminal Configuration

Pin Number	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND


Top view

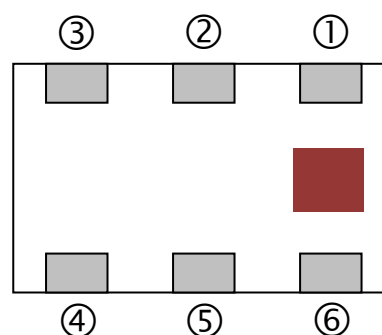

PCB Layout

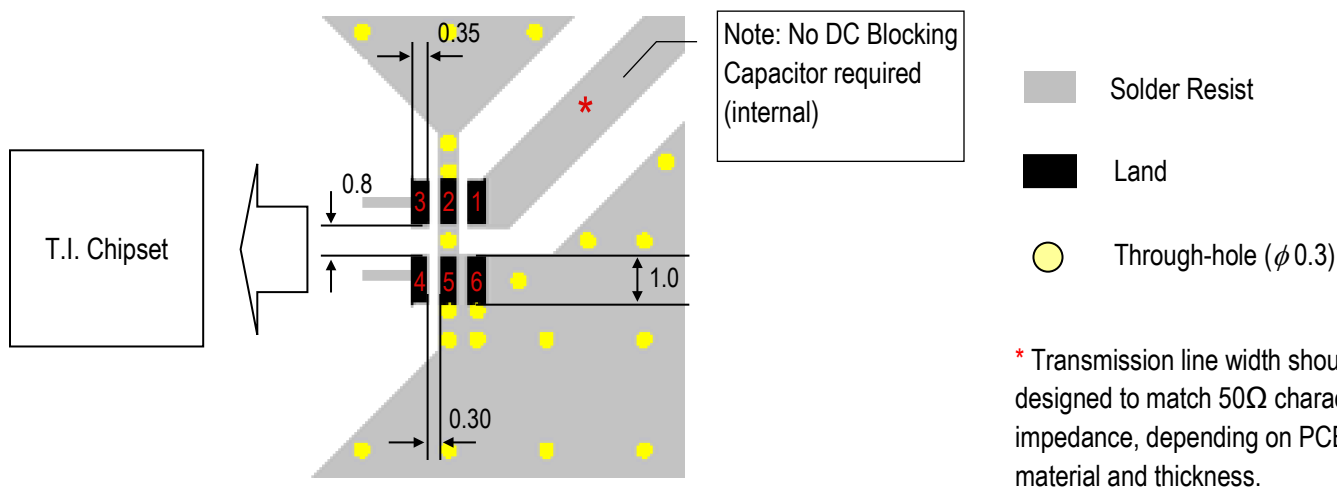

PCB Reference Design

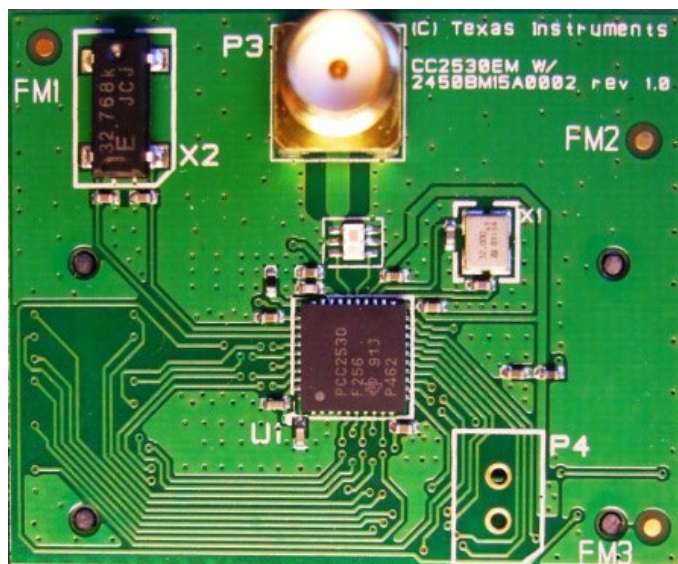


For Gerber Files and TI Reference Notes: <http://www.ti.com/tool/cc2530balun-refdes>

If you would like the full reference design package or have any questions, contact our application engineers at <https://www.johansontechnology.com/ask-a-question>



RF Measurement

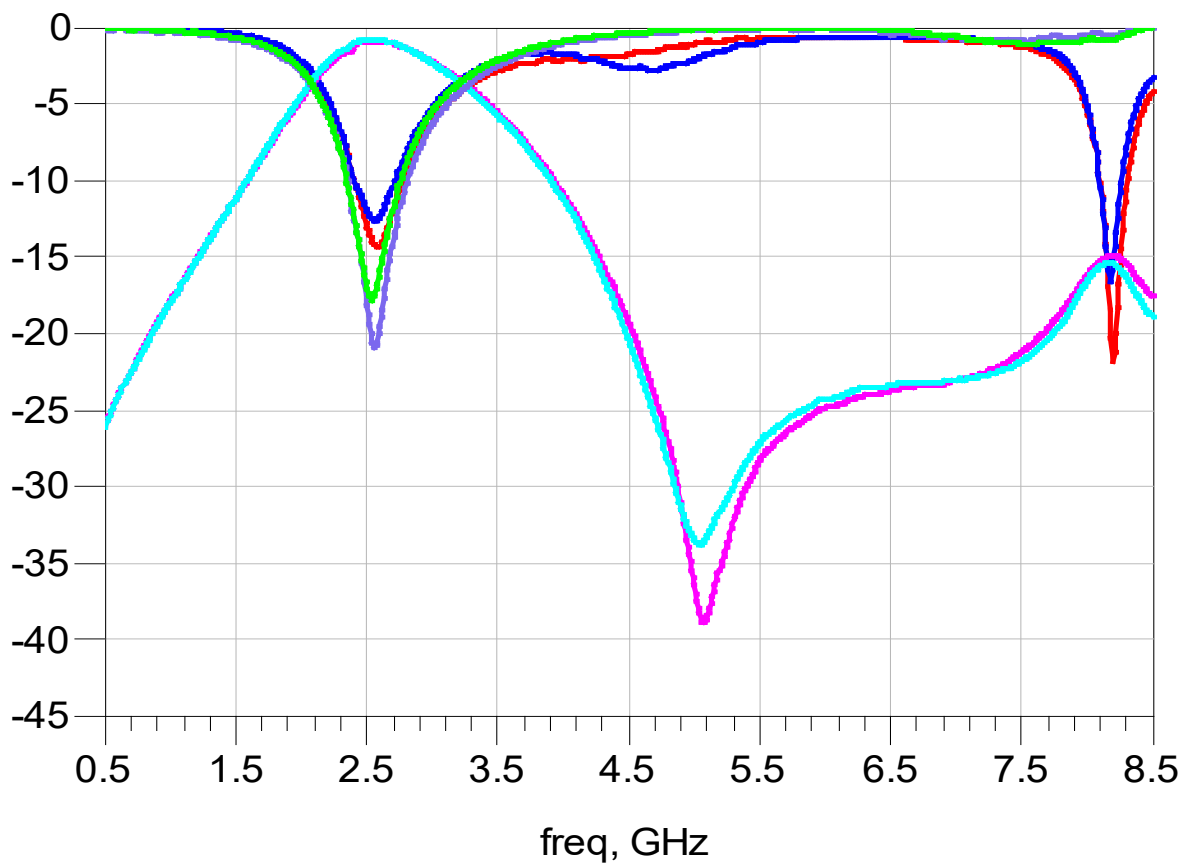

25°C Unbalanced RL

25°C Balanced Return Loss

25°C Insertion Loss/Attenuation (Differential Mode)

125°C Unbalanced RL


125°C Balanced Return Loss

125°C Insertion Loss/Attenuation (Differential Mode)

S-parameter and layout file available upon request. Please contact <https://www.johansontechnology.com/ask-a-question>


Tape and Reel Specification (Units in mm)

Tape Dimensions

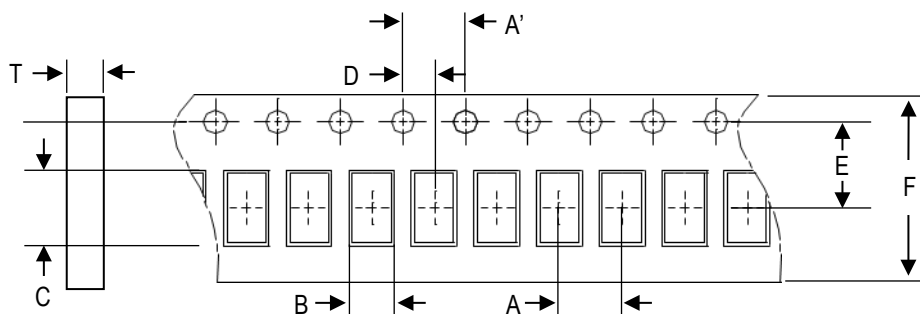


A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
4.0±0.1	4.0±0.1	1.35±0.05	2.15±0.05	2.0±0.05	3.5±0.1	8.0±0.1	1.00±0.05	4,000pcs	Plastic (Embossed)

Reel Dimensions

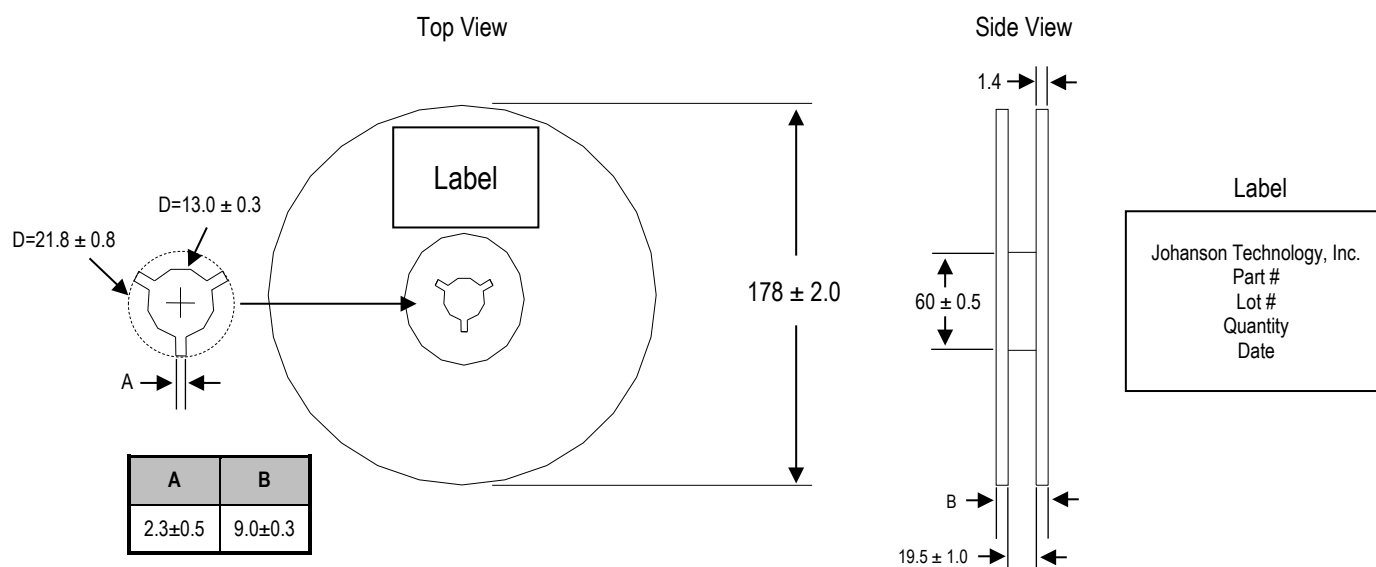

Leader and Trailer Dimensions

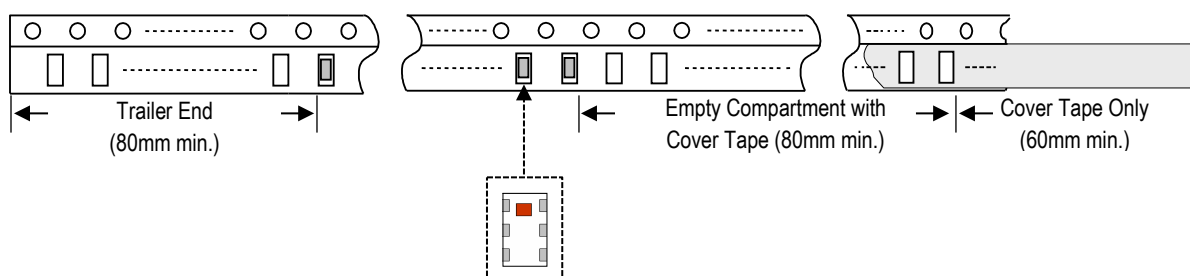

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)