

NEW



Quality and reliability is our tradition

KYORITSU

CARD TYPE DIGITAL MULTIMETER KEW 1019R

Small but versatile
~High-grade card type tester~



Actual Size

CE
TRUE RMS

- **Elegant shiny-black finish**
- **Comes with user-friendly Hard case**
- **Large Display**
- **Accurate reading with True-RMS technology**
- **Electronic protection (no fuse!) on ohm and continuity ranges**
- **Safety Standard IEC 61010-1/61010-031/61010-2-033 CAT III 300V / CAT II 600V**

Easy to open



Small and compact



Detachable CAT III Cap



KYORITSU ELECTRICAL INSTRUMENTS WORKS,LTD.


<http://www.kew-ltd.co.jp>

KEW 1019R Specifications

DC V	600.0mV/6.000/60.00/600.0V (Input impedance: approx. 10M Ω) ±0.8%rdg±5dgt (600.0mV/6.000/60.00V) ±1.0%rdg±5dgt (600.0V)
AC V (RMS)	6.000/60.00/600.0V (Input impedance: approx. 10M Ω) ±1.3%rdg±5dgt (6.000/60.00V) (50/60Hz) ±1.7%rdg±5dgt (6.000/60.00V) (45 - 500Hz) ±1.6%rdg±5dgt (600.0V) (50/60Hz) ±2.0%rdg±5dgt (600.0V) (45 - 500Hz)
Ω	600.0 Ω /6.000/60.00/600.0k Ω /6.000/40.00M Ω ±1.0%rdg±5dgt (600.0 Ω /6.000/60.00/600.0k Ω /6.000M Ω) ±2.5%rdg±5dgt (40.00M Ω)
Continuity buzzer	600.0 Ω (Buzzer threshold value 60 Ω or less)
Capacitance	6.000/60.00/600.0nF/6.000/60.00/600.0 μ F ±3.5%rdg±5dgt (6.000nF) ±3.5%rdg±10dgt (60.00nF) ±3.5%rdg±5dgt (600.0nF/6.000/60.00 μ F) ±4.5%rdg±5dgt (600.0 μ F)
Applicable standards	IEC 61010-1 CAT III 300V, CAT II 600V Pollution degree 2 IEC 61010-2-033, IEC 61010-031, IEC 61326-2-2
Power source	CR2032(3V)x1
Continuous measuring time	Approx.120 hours Auto sleep: approx.15 minutes
Dimensions/Weight	126(L)x85(W)x18(D)mm / Approx.135g (including hard case, battery)
Accessories	9188 (Hard case), CR2032x1, Instruction manual

*AC V: CF \leq 3(50/60Hz) For non-sinusoidal waveforms, add ±0.5%rdg±5dgt, 900Vpeak

True RMS function for accurate readings also in presence of modern loads such as LED lamps, motor inverters, PCs, TVs, Air conditioners, etc.

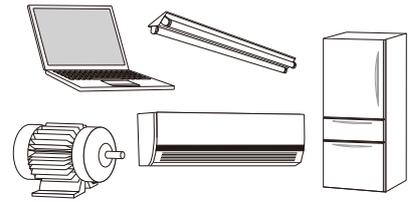


Waveform	True RMS type TRUE RMS	Averaging value type
	✓ correct reading	✓ correct reading
	✓ correct reading	higher reading
	✓ correct reading	lower reading
	✓ correct reading	lower reading

Included Accessory




9188 (Hard case)

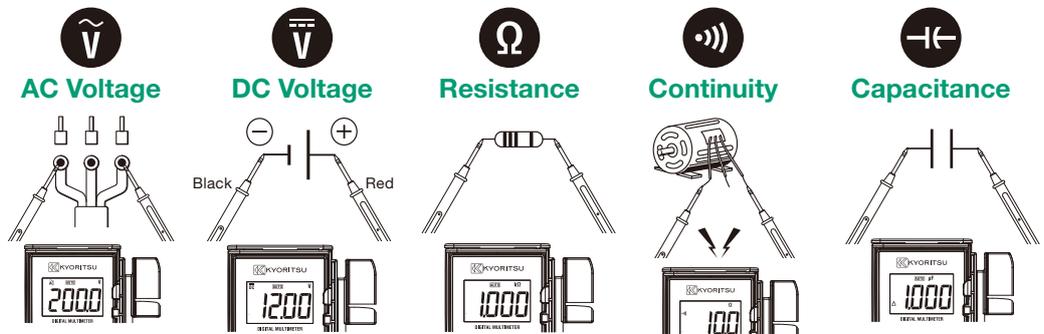

User-friendly Hard case

Easy to open

Fast to use, Fast to store



Organized storage

Easy to store test-lead



Probe holder

Easy to measurement



Cap holder

To prevent loss



Safety Warnings :

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

For inquires or orders :



**KYORITSU ELECTRICAL
INSTRUMENTS
WORKS, LTD.**

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan

Phone:+81-3-3723-0131

Fax:+81-3-3723-0152

E-mail:info-eng@kew-ltd.co.jp

<http://www.kew-ltd.co.jp>



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Multimeters](#) category:

Click to view products by [Kyoritsu](#) manufacturer:

Other Similar products are found below :

[2727795](#) [2727486](#) [6111-517](#) [FS881](#) [40705X](#) [3026976](#) [P 8100](#) [UT136B](#) [UT39C](#) [208107](#) [DM5](#) [DT-8807H](#) [DT-8806H](#) [DT-812](#) [DT-820V](#)
[DT-811](#) [DT-5505](#) [DT-8980D](#) [DT-660B](#) [DT-9810](#) [OW16B](#) [B33+](#) [OW18D](#) [OW18E](#) [NDM2041](#) [OW18B](#) [XDM1041-U](#) [XDM1041-R](#)
[UT89XE](#) [UT122](#) [MT-1217-C](#) [MT-1508-C](#) [MT-1220-C](#) [MT-1510-C](#) [MT-1509-C](#) [MT-4606-C](#) [MT-1225-C](#) [3021](#) [03026](#) [03032](#) [UT300A+](#)
[UT123](#) [UT61D+](#) [UT117C](#) [UT39A+](#) [UT60BT](#) [UT89XD](#) [UT15B PRO](#) [UT58B](#) [UT139E](#)