

## LF-FMR120YSIII

FMR\*YSIII non-SELV 1-driver with 10-output current | Constant Current - Non dimmable



### Product family features

- Low THD<10%@full load
- Rated input voltage: 220-240Vac
- Ta: -30°C~+60°C
- Ripple current<5%
- Suitable for Class I light fixtures
- 5 years guarantee



### Product family benefits

- Output current adjustable via DIP switch in 10 shifts
- Super high efficiency
- Linear metal casing with 21mm housing height
- Long lifetime and high reliability
- Flicker free
- Non-SELV output

### Typical applications

- For linear light and tri-proof light
- For office, commercial, decorative and retail lighting

### Product parameters

- Output current 300/350/400/450/500/550/600/650/700/750mA
- Output voltage 54-230Vdc
- Output power 16.2-120W
- Efficiency 94%
- Input voltage 198-264Vac

## Electrical data

### Input data

Rated supply voltage	220 ... 240V
AC voltage range	198 ... 264V
Mains frequency	0/50/60Hz
Input voltage DC	200 ... 264V <sup>1)</sup>
Power factor	≥0.95
Efficiency in max. power	94% <sup>2)</sup>
THD	≤10%
Input current	0.66A Max@220-240Vac; 0.31-0.57A@220-240Vdc
Inrush current	60A <sup>3)</sup>
Loading no. on circuit breaker 10 A (B)	6
Loading no. on circuit breaker 10 A (C)	11
Loading no. on circuit breaker 16 A (B)	11
Loading no. on circuit breaker 16 A (C)	18
Loading no. on circuit breaker 20 A (C)	22
Loading no. on circuit breaker 25 A (C)	28
Protective conductor current	≤0.35mA

### Output data

Nominal output voltage	54... 230V <sup>4)</sup>
Nominal output current	300/350/400/450/500/550/600/650/700/750mA <sup>5)</sup>
Default output current	750mA
Current set	DIP switch (please see the DIP switch definition)
Maximum output power	120W
Nominal output power	16.2... 120W
Output ripple current (100 Hz)	<5%
Flicker	Comply with IEEE Std 1789-2015
CIE SVM	≤0.4
IEC-Pst	≤1
Output current tolerance	±5% <sup>6)</sup>
Temperature tolerance	±10%
Starting time	<0.5S

### Safety

Withstanding voltage	I/P-PG: 1.6kV&5mA&60S;
Surge capability (L-N)	1kV
Surge capability (L/N-Ground)	2kV
Insulation resistance	I/P-PG O/P-PG: >100MΩ@500VDC
Guarantee	5 years <sup>7)</sup>

1) DC input is only for emergency

2) @output current>400mA&maximum output power

3) t =210μs

4) Please refer to the operating window about the relationship between output voltage and output current.


5) Fixed current version optional

6) It's ±5% when the output current is 550-750mA; it's ±7% when the output current is 300-500mA


7) 5 years @Tc≤90°C

# Characteristic diagram


Operating Window

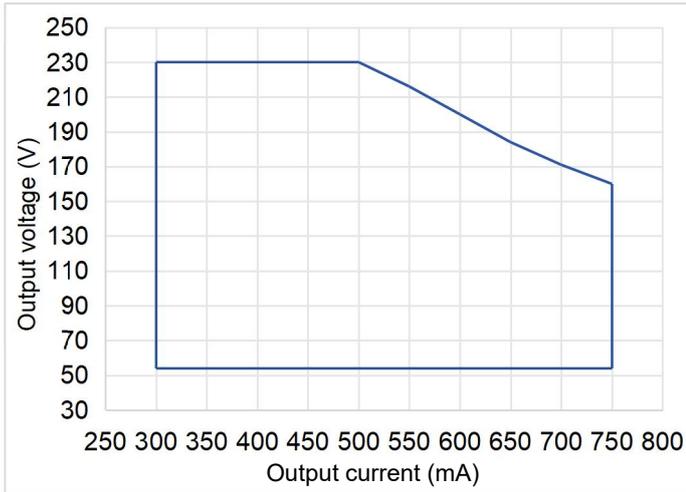


Typical Efficiency vs Load

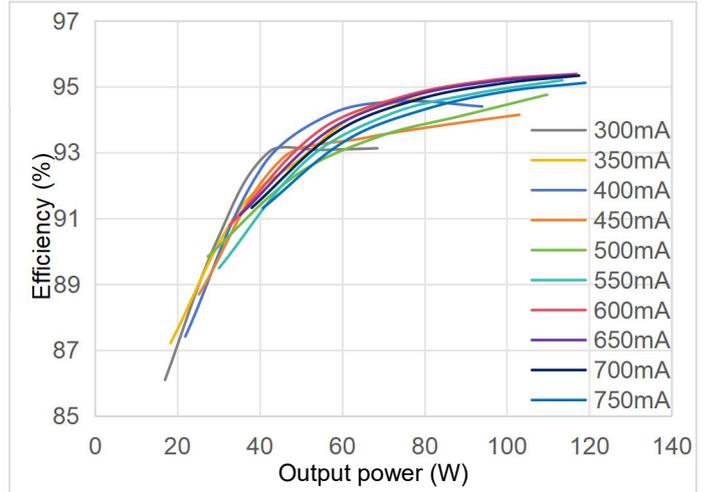


Typical Power Factor vs Load

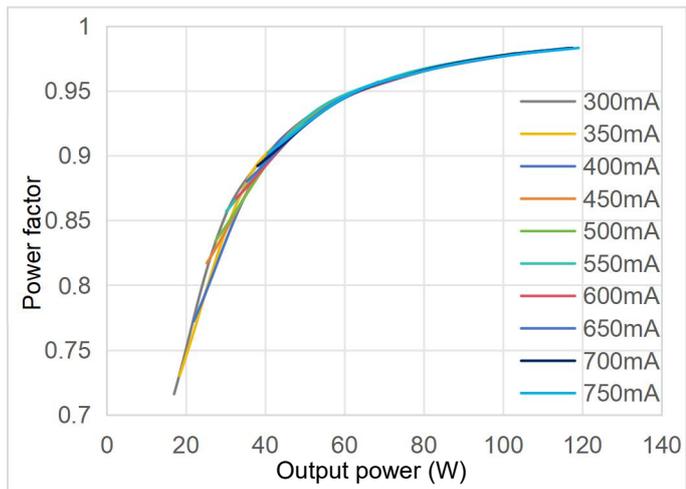


Typical THD vs Load

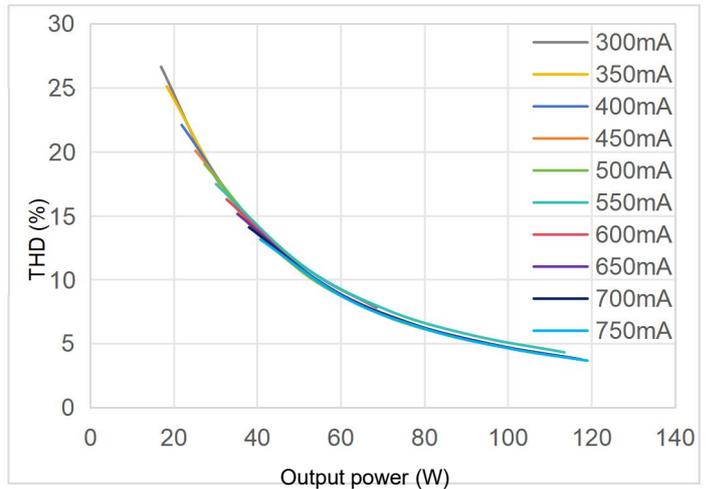

## Lifespan

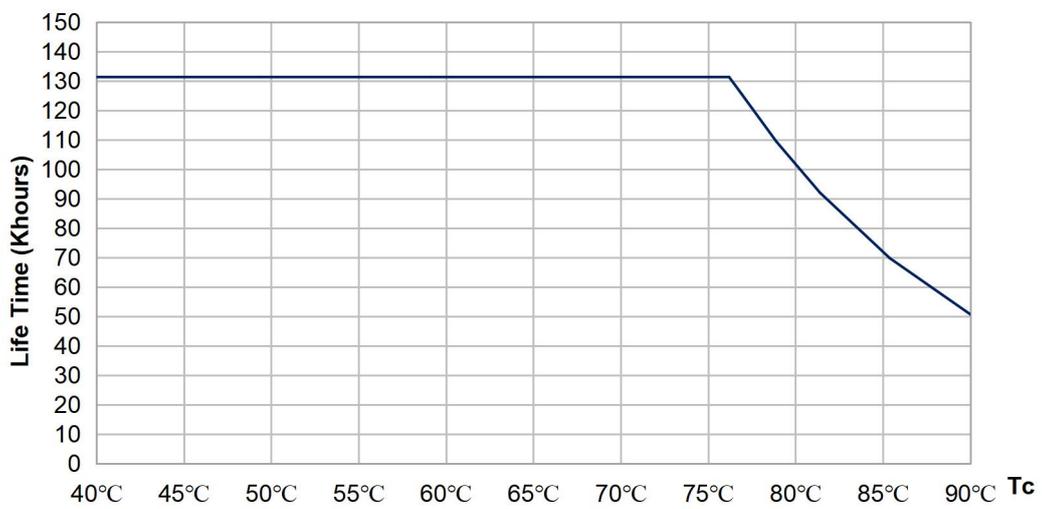

## Dimensions

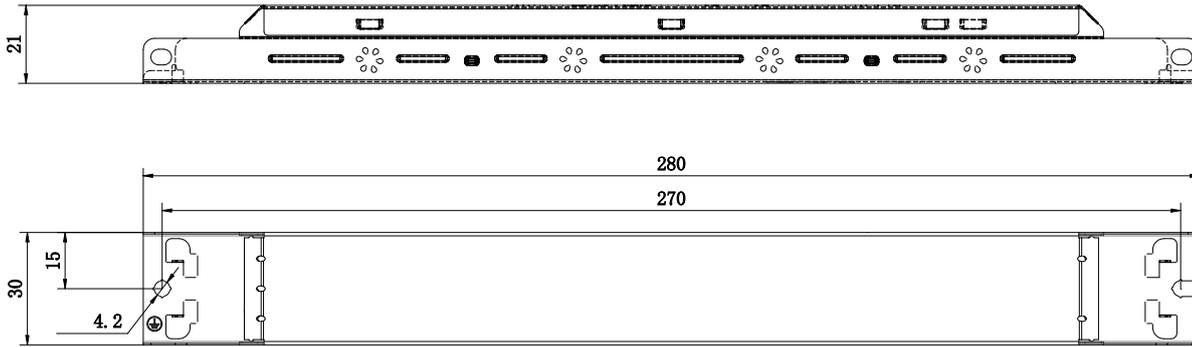

<b>Mounting hole spacing, length</b>	270.0mm
<b>Mounting hole diameter</b>	4.2mm
<b>Product weight</b>	200.0g
<b>Cable cross-section, input side</b>	0.5 ... 1.5 mm <sup>2</sup>
<b>Cable cross-section, output side</b>	0.5 ... 1.5 mm <sup>2</sup>
<b>Wire preparation length, input side</b>	7 ... 8mm
<b>Wire preparation length, output side</b>	7 ... 8mm
<b>Length</b>	280.0mm
<b>Width</b>	30.0mm
<b>Height</b>	21.0mm


### Colors & materials

<b>Casing material</b>	Color coated galvanized sheet
<b>Casing color</b>	White

## Temperature & operating conditions

<b>Ambient temperature range</b>	-30°C - +60°C
<b>Maximum temperature at Tc test point</b>	90°C
<b>Temperature range at storage</b>	-30°C - +80°C (6 months in Class I environment)
<b>Humidity range at storage</b>	10-95%RH (no condensation)
<b>Humidity during operation</b>	20-90%RH
<b>RoHS</b>	RoHS 2.0 (EU) 2015/863

## Tc test point

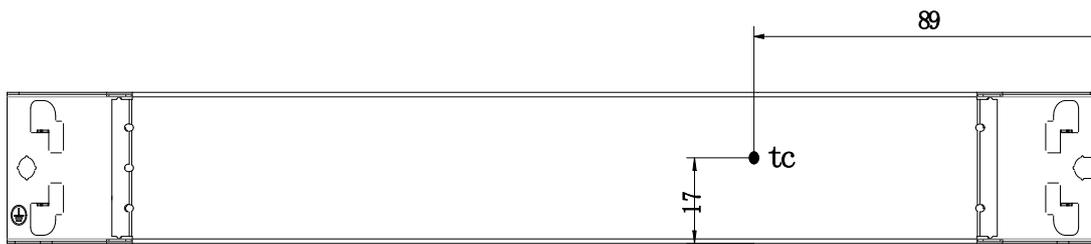

Note: this diagram is the front view and Tc point is on the front side of the driver.

## Product Terminal

Input		Output	
<b>AC-L</b>	AC live wire input	<b>LED+</b>	Positive electrode output of LED driver
<b>AC-N</b>	AC neutral wire input	<b>LED-</b>	Negative electrode output of LED driver
	Earth wire		

## DIP switch Terminal

Output current	Output voltage	DIP switch 1	DIP switch 2	DIP switch 3	DIP switch 4
300mA	54-230Vdc	ON	ON	ON	ON
350mA	54-230Vdc	ON	-	ON	ON
400mA	54-230Vdc	-	-	ON	ON
450mA	54-230Vdc	ON	-	-	ON
500mA	54-230Vdc	ON	-	ON	-
550mA	54-216Vdc	-	-	-	ON
600mA	54-200Vdc	-	-	ON	-
650mA	54-184Vdc	-	ON	-	-
700mA	54-171Vdc	ON	-	-	-
*750mA	54-160Vdc	-	-	-	-

Note: "-": shift OFF. "\*": default current. DIP when power on is NOT allowed. Please disconnect the AC power before DIP.

## Capabilities

Dimmable	-
Over heating protection	-
Overload protection	-
Short-circuit protection	Automatic reversible
No-load protection	<250V
Suitable for fixtures with prot. class	I
Control interface	-
Number of channels	1 channel

## Certificates & standards

Approval marks	ENEC, UKCA, CE, CB, EL, RCM, SAA, EAC, CCC
Standards	GB 19510.1-2009, GB 19510.14-2009 IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493 IEC/EN 62384 IEC/EN 61347-2-13 Annex J AS 61347.1, AS 61347.2.13 TP TC 004/2011+TP TC 020/2011
EMC	GB 17625.1-2022, GB/T 17743-2021 EN 55015, EN 61547, EN 61000-3-2,3
Type of protection	IP20

## Logistical Data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-FMR120YSIII	42	385mm*285mm*210mm	23.04 dm <sup>3</sup>	9.33kg±5%

## Test equipment & condition

Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
----------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.

## Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. Configure the quantity of circuit breakers based on inrush current and time.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
5. It is well-advised that the withstanding voltage of LEDs and aluminum substrates >3kV.
6. The output power of the DIP switch in the range of 25-30W does not meet the single harmonic requirements of European IEC61000-3-2 Class C.
7. It is recommended to install double-pole switch at AC input terminal. If user uses the single-pole switch, make sure to connect it to wire L (live wire), otherwise the afterglow of light fixture would be incurred after the AC is disconnected.
8. There exists stray capacitance between LED light fixture and aluminum substrate, and the light fixture will have transient slight brightness the moment the mains is connected and the aluminum substrate is connected to the earth (the whole light fixture connected to the earth). This is of no abnormalities for a non-isolated LED driver. And if the above issue needs to be avoided, please replace the non-isolated with the isolated.
9. The light panel, fixed bracket and driver grounding should be secure.

## Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

## Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Lifud Technology](#) manufacturer:*

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [OECCDD02-350](#) [OECCDD02-700](#) [OECCDD02-300](#) [OECCDD02-450](#) [OECCDD02-600](#)  
[ESS015W-1000-12](#) [ESS030W-1050-21](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [OTE 25/220-240/700 PC](#) [OT FIT 30/220-240/700 CS](#)  
[CNB50W-1200-42-CAS](#) [87500757](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2 PLUG 2000MA BL](#)  
[LC 50/200-350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC](#)  
[SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC](#)  
[PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 50/100-](#)  
[400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W](#)  
[350-1050MA FLEXC SR EXC](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC](#)  
[14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#) [LC 65W 200-350MA 210V FLEXC LP SNC4](#) [LC 60/1400/43 FIXC SR SNC2](#) [LC](#)  
[75W 250-400MA 220V O4A LP ADV](#) [4880](#) [PWM-60-24DA2](#) [PWM-90-48DA2](#) [8538](#) [LC 165/400-700/320 FLEXC LP SNC4](#) [LCO 40W](#)  
[200-1050MA 64V O4A NF C EXC3](#) [LCI 150/250-1050/300 PD NF H28 PRE4](#)