


BAL-0003 **BROADBAND BALUN (200 kHz to 3 GHz)**

DEVICE OVERVIEW

General Description

The BAL-0003SMG is a broadband surface mount balun, hand-tuned for optimal phase and amplitude balance over a 500 kHz to 3 GHz bandwidth. It serves as an excellent choice for analog to digital converters, balanced receivers, baseband digital modulations, and signal integrity enhancement.

[Download s-parameters here](#)




Features

- 2:1 Impedance Ratio
- 200 kHz to 3 GHz Balun (Balanced to Unbalanced Transformer)
- Matched 50 Ohm Impedance on Input and Output Ports
- Tuned for Optimal Phase/Amplitude Balance

Applications

- Analog to Digital Converters
- Balanced Receivers
- Baseband Digital Modulation
- Signal Integrity

Functional Block Diagram

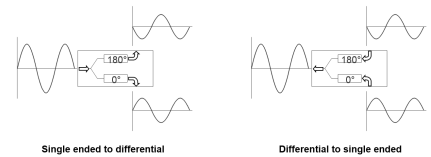

Part Ordering Options

Part Number	Description	Connectors	Green Status	Product Lifecycle	Export Classification
BAL-0003	BROADBAND BALUN (200 kHz to 3 GHz)	<u>Standard</u>	REACH RoHS	Released	EAR99

Table Of Contents




■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Electrical Specifications
Functional Block Diagram	Time Domain Performance Plots
	Typical Performance Scattering Parameters
	Mixed Mode Scattering Parameters
■ Port Configuration and Functions	
Port Functions	
	■ Mechanical Data
■ Revision History	Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2011-01-01	Datasheet initial Release
A	2014-01-01	Typical Performance plots added
B	2019-10-01	Mixed Mode Scattering Parameters added
C	2019-11-01	RoHs Compliant assembly
D	2020-07-01	Specs Table Update
E	2020-10-01	Specs Table Update

Port Configuration and Functions

Port Functions

Port	Function	Connector Type	Description	DC Equivalent Circuit
Common Port / In (Unbalanced)	RF Input	SMAF	The common port is DC short to ground.	 Common Port (Unbalanced)
Out 1 / 0° Port (Balanced)	0° Port	SMAF	The 0o port is DC short to ground.	
Out 2/ 180° Port	180° Port	SMAF	The 180o port is DC short to ground.	

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
RF Power Handling	1	W

Package Information

Parameter	Details	Rating
Weight	-	26g
Dimensions	-	66.04 x 16.76 mm

Electrical Specifications






Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Amplitude Balance	-	0.0002	3	-	0.05	0.5	dB
Common Mode Rejection	-	0.0002	3	35	45	-	dB
Impedance Ratio	-	-	-	-	2:1	-	-
Insertion Loss as a Mode Converter	-	0.0002	3	-	4	5	dB
Isolation	-	0.0002	3	-	8	-	dB
Nominal Phase Shift	-	0.0002	3	-	180	-	°
Phase Balance	-	0.0002	3	-	1	5	°
Risetime/Falltime ¹	-	0.0002	3	-	48	-	ps
VSWR (Input)	-	0.0002	3	-	8	-	-
VSWR (Output)	-	0.0002	3	-	1.7	-	-

^[1] Specified as 90%/10%. Calculated from $\text{Tau}_{\text{balun2}} = (\text{Tau}_{\text{out2}} - \text{Tau}_{\text{in2}})$





Time Domain Performance Plots

Oscilloscope measurements of the BAL-0003 with a 2.5 Gb/s PBRs pattern. Bit pattern is measured with a 27-1 PBRs input demonstrating extremely good pulse fidelity for both inverted and non-inverted output. Eye diagrams are taken with 231-1 PBRs input demonstrating minimal eye distortion/closure afforded by the extremely low frequency operation of the balun (<200 kHz).

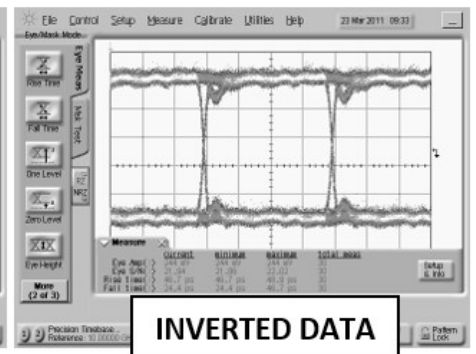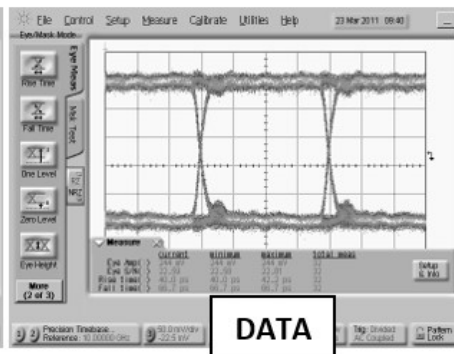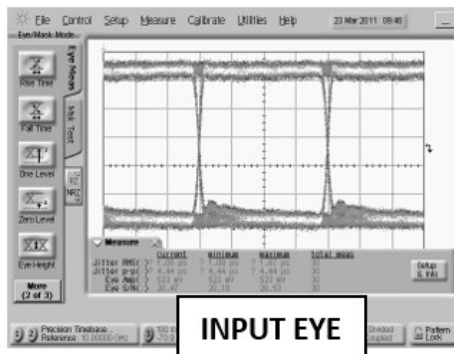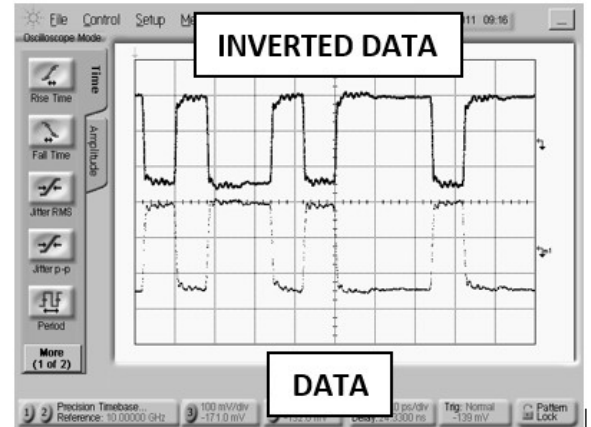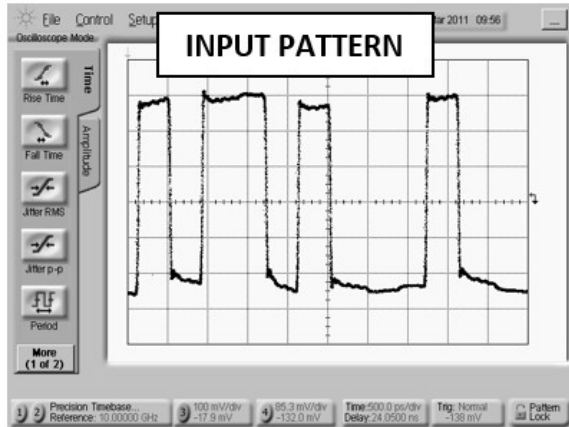


Typical Performance Scattering Parameters

Three port scattering parameters measured as three single-ended 50Ω ports showing relationship between any two ports. For example: S21 and S31, often referred to as insertion loss of a balun, is the output response on ports 2 and 3 with an input stimulus on port 1.

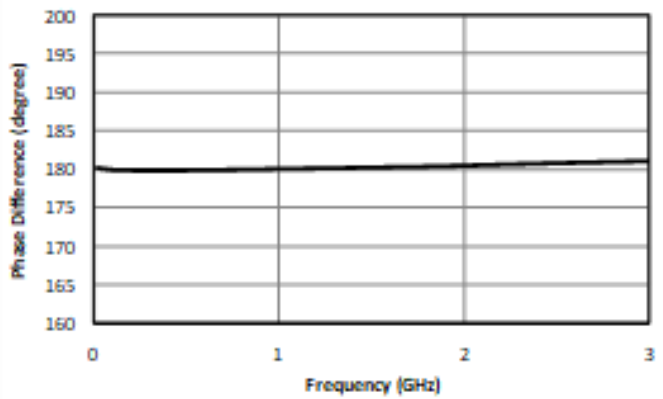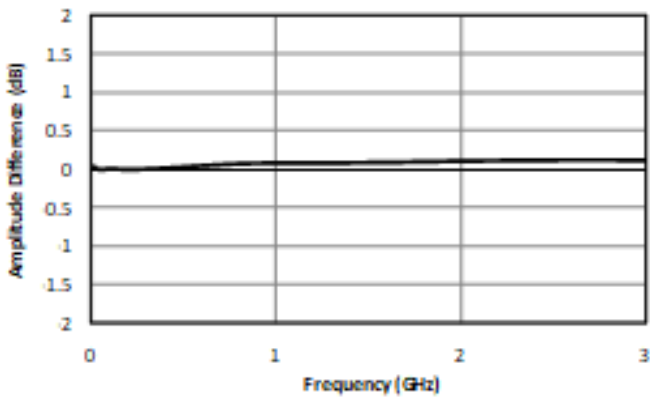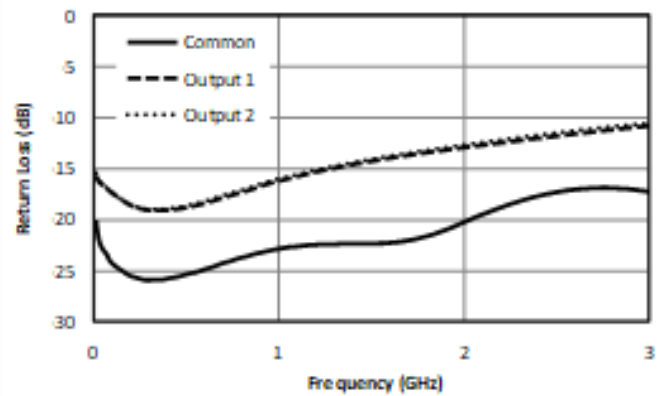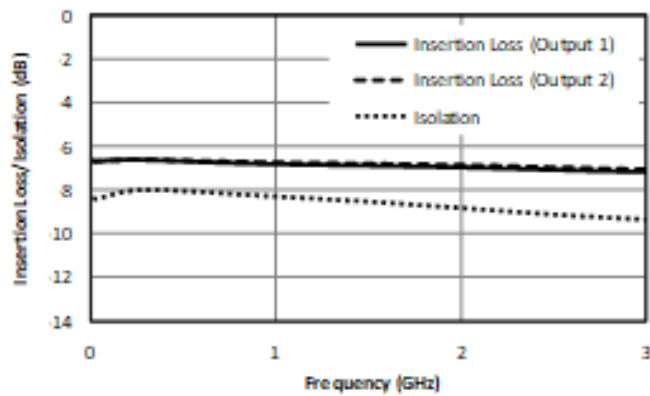


BAL-0003

BROADBAND BALUN (200 kHz to 3 GHz)



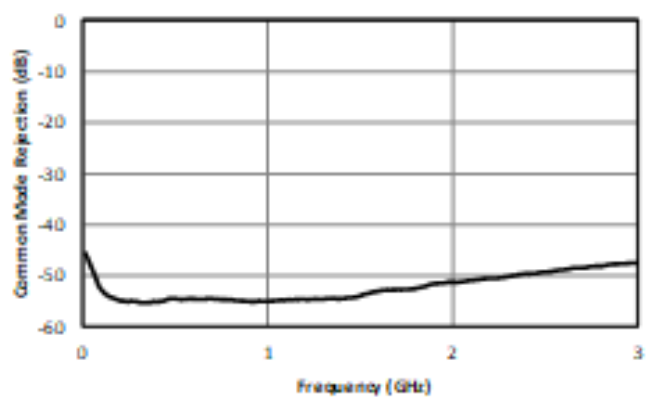


Mixed Mode Scattering Parameters

Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: S12ds is the differential output response given a single ended input.

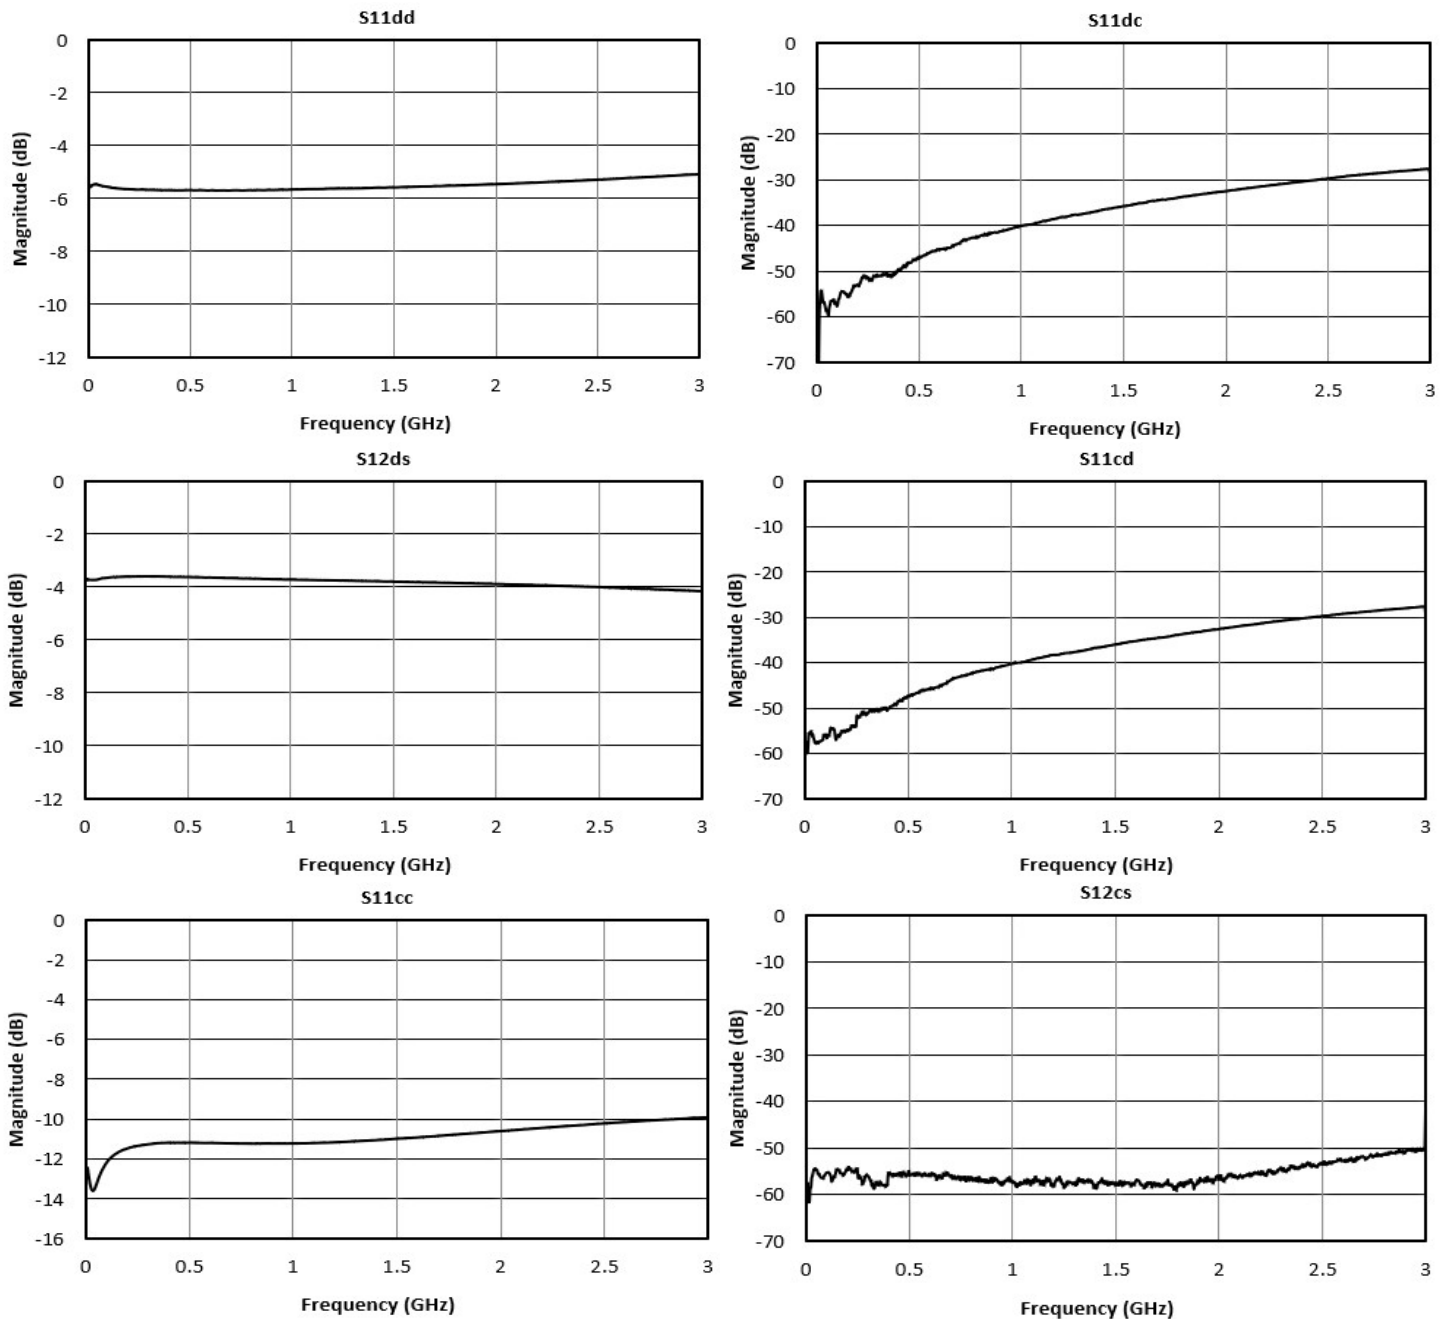

BAL-0003 BROADBAND BALUN (200 kHz to 3 GHz)

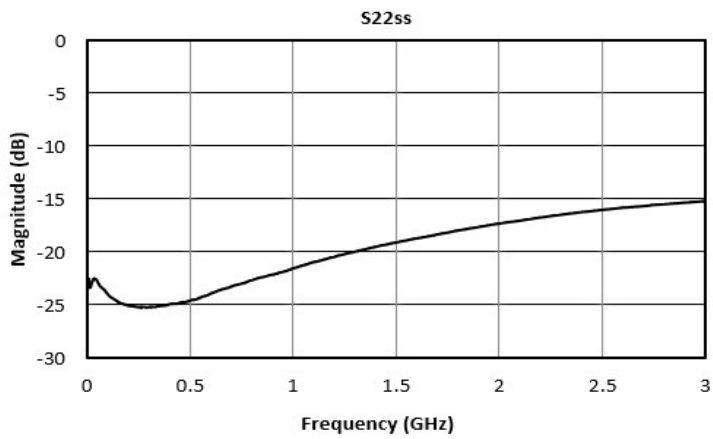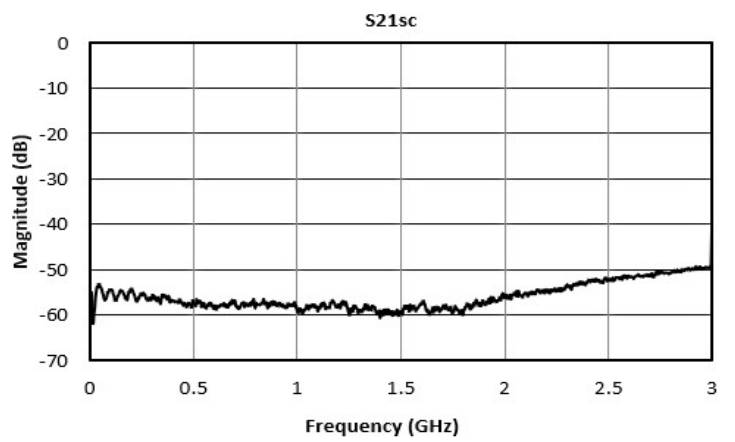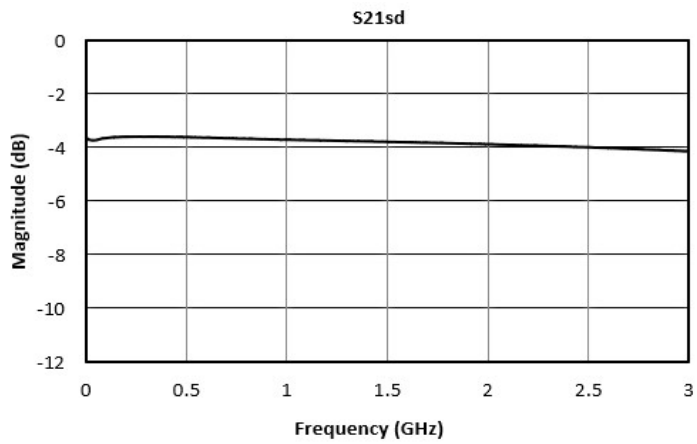


BAL-0003

BROADBAND BALUN (200 kHz to 3 GHz)

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

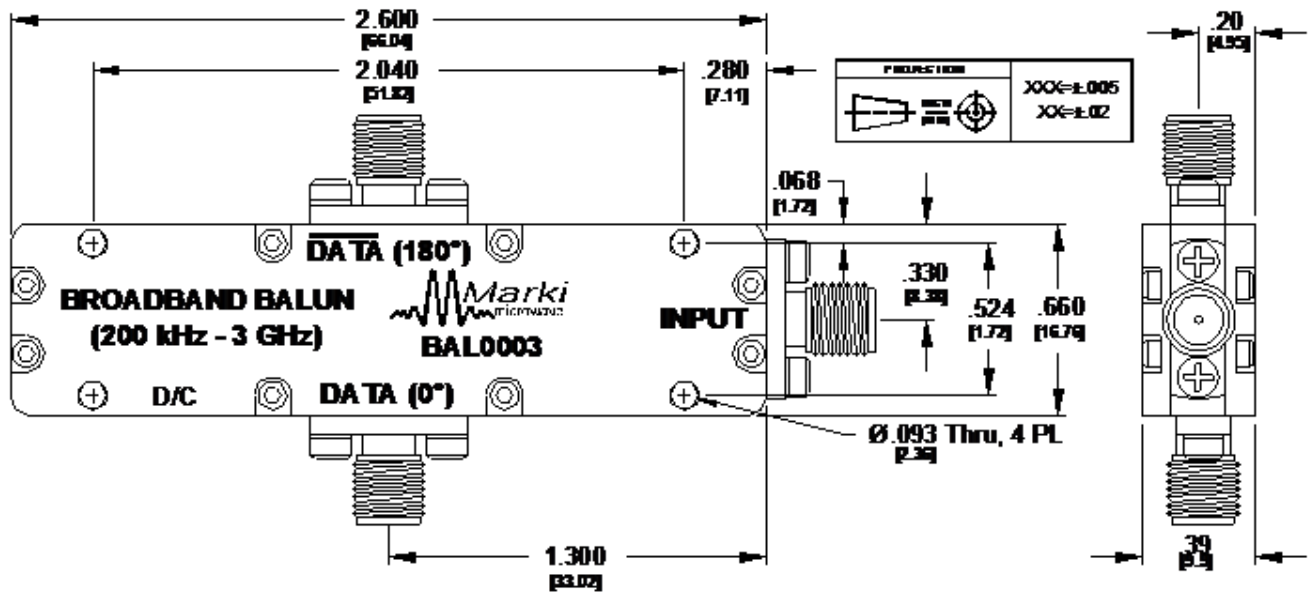

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Marki Microwave](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)