


MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1 Balun

DEVICE OVERVIEW

General Description

The MBAL-0R106CSP2 is a GaAs passive MMIC 2:1 balun that features excellent 33 dB common mode rejection over a 0.1 to 6 GHz operational bandwidth. The MBAL-0R106CSP2 is footprint compatible with the 1:1 MBALH-0R106CSP2, offering flexibility in system design. For ADC and DAC interface applications, the choice between the 2:1 and 1:1 configurations will depend on specific system requirements. This device is an ideal solution for digital beamforming and other higher-order Nyquist sampling applications, as well as clock distribution and balanced amplifier interfaces. Available in a lead-free, RoHS compliant 2.5 x 2.5 mm CSP2 package, it is compatible with standard pick-and-place assembly processes.



[Download s-parameters here](#)


Features

- 2:1 Impedance Ratio
- 0.1 GHz to 6 GHz Balun (50Ω Common to 100Ω Differential)
- Optimal Phase and Amplitude Balance of 0.5° and 0.2 dB
- 33 dB Common Mode Rejection
- Compact 2.5mm chip scale package
- This product embodies Marki Microwave's U.S. Pat. 11,869,858.

Applications

- Balanced Receivers
- Signal Integrity
- Analog to Digital Converters
- Balanced Amplifiers
- Clock Distribution

Functional Block Diagram

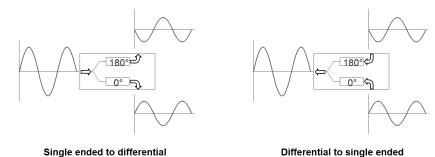

Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MBAL-0R106CSP2	0.1-6 GHz Passive MMIC Chip Scale Package 2:1 Balun	CSP2	REACH RoHS	Released	EAR99
EVB-MBAL-0R106	Evaluation Board, 0.1-6 GHz Passive MMIC Chip Scale Package 2:1 Balun	EVB	REACH RoHS	Released	EAR99

Table Of Contents

■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Electrical Specifications
Functional Block Diagram	Mixed Mode Scattering Parameters
	Typical Performance Scattering Parameters
■ Port Configuration and Functions	■ Mechanical Data
Port Functions	Outline Drawing
■ Revision History	■ Footprint Image
	■ Evaluation Board
	Evaluation Board - Performance Data
	Evaluation Board Outline Drawing

Revision History




Revision Code	Revision Date	Comment
-	2025-04-21	Initial Release
A	2025-04-28	Updated Moisture Sensitivity from MSL3 to MSL1
B	2026-06-03	Updated Port Description

MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1
Balun

Port Configuration and Functions

Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	Ground pad should be connected to RF/DC ground with low electrical and thermal resistance.	
Pin 1	Common Port / In (Unbalanced)	The common port is DC short to ground.	
Pin 3	Out 1 / 0° Port (Balanced)	The 0° port is DC short to ground.	
Pin 4	Out 2 / 180° Port (Balanced)	The 180° port is DC open.	
Pins 2,5	NC	Pins 2 and 5 are not internally connected. They can be connected to ground for normal operation.	

MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1
Balun

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	2.50 x 2.50 mm
Moisture Sensitivity Level	-	MSL 1

MBAL-0R106CSP2







0.1-6 GHz Passive MMIC Chip Scale Package 2:1 Balun

Electrical Specifications

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Amplitude Balance	25°C	0.1	6	-	0.1	-	dB
Common Mode Rejection	25°C	0.1	6	-	33	-	dB
Common Port Return Loss	25°C	0.1	6	-	13	-	dB
Impedance	25°C	0.1	6	-	50	-	Ω
Insertion Loss as a Mode Converter	25°C	0.1	6	-	3.3	-	dB
Isolation	25°C	0.1	6	-	6	-	dB
Nominal Phase Shift	25°C	0.1	6	-	180	-	°
Output Return Loss	25°C	0.1	6	-	7	-	dB
Phase Balance	25°C	0.1	6	-	0.5	-	°
Impedance Ratio	-	-	-	-	2:1	-	-

Mixed Mode Scattering Parameters








Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: Scs12 is the Common output response given a single ended input.

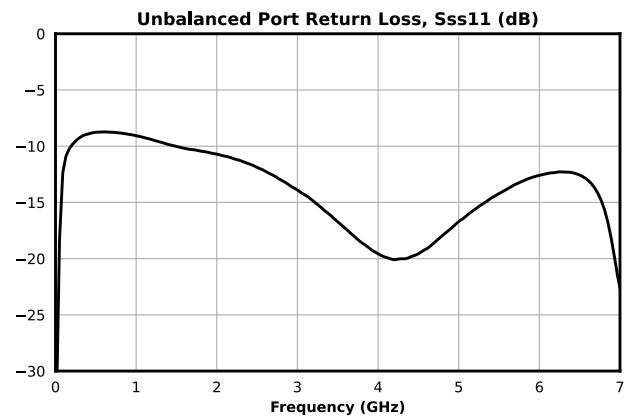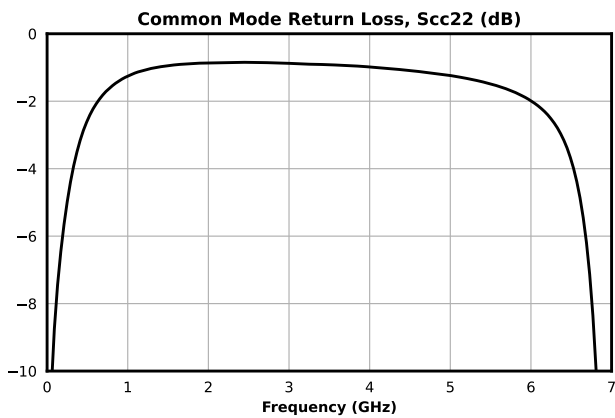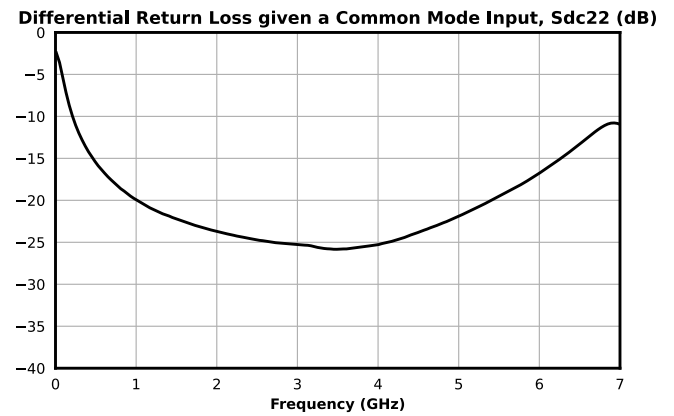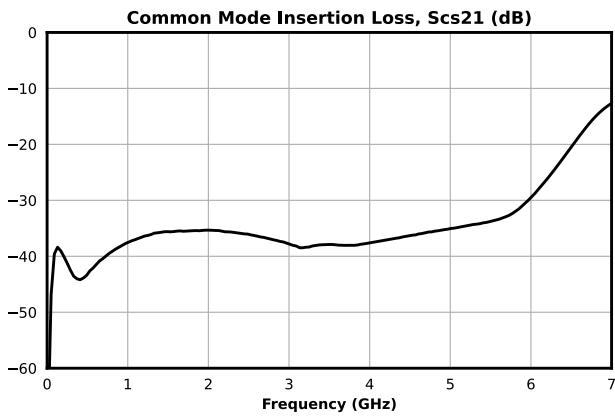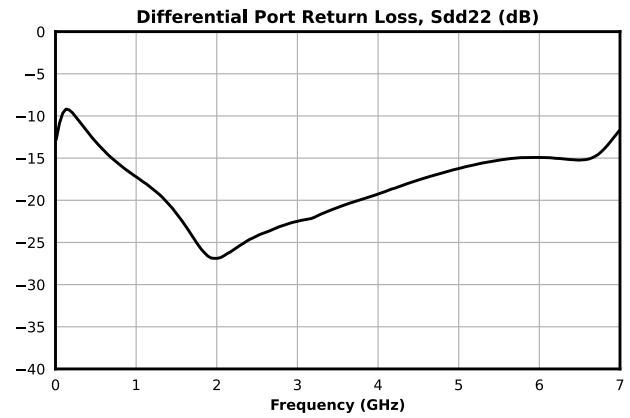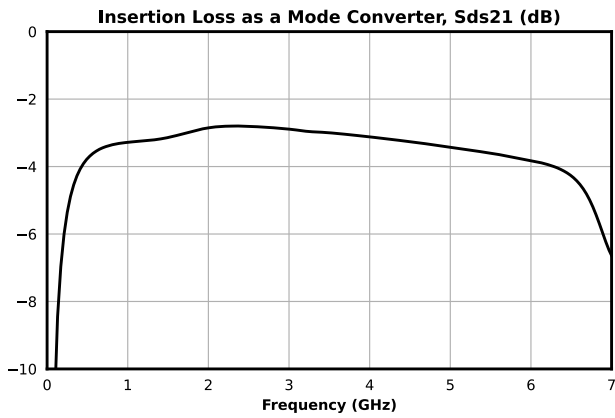

MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1
Balun

Typical Performance Scattering Parameters

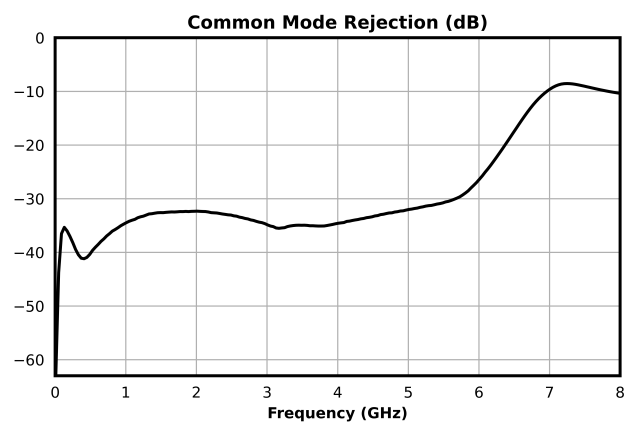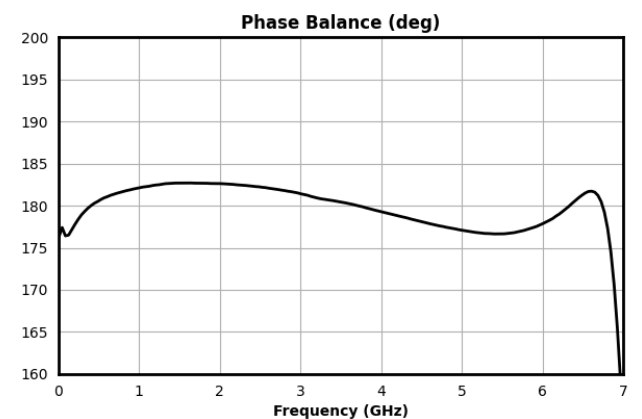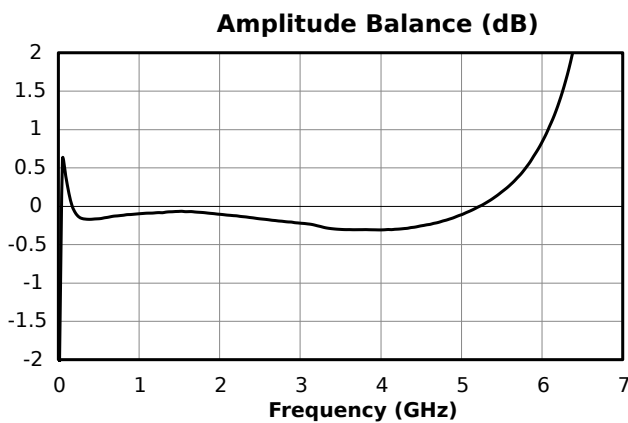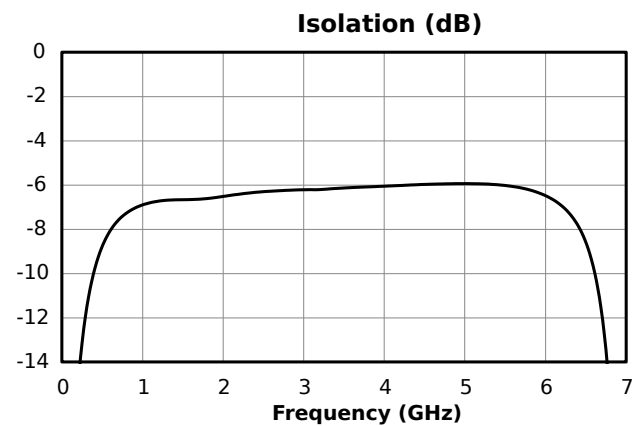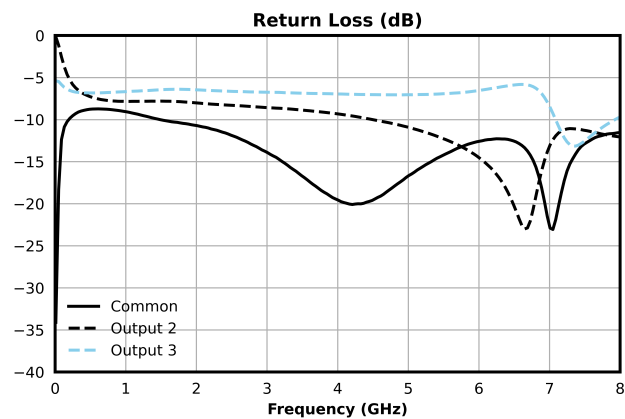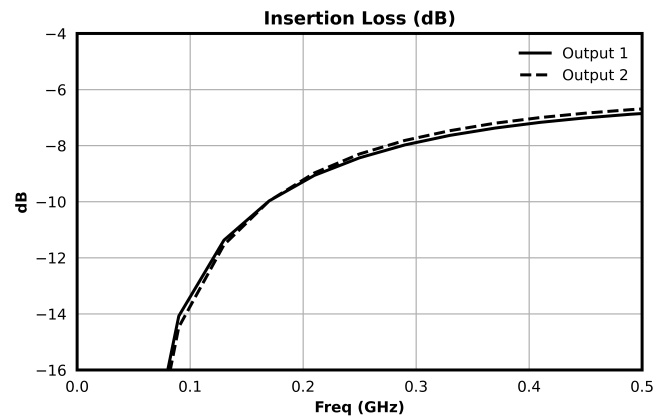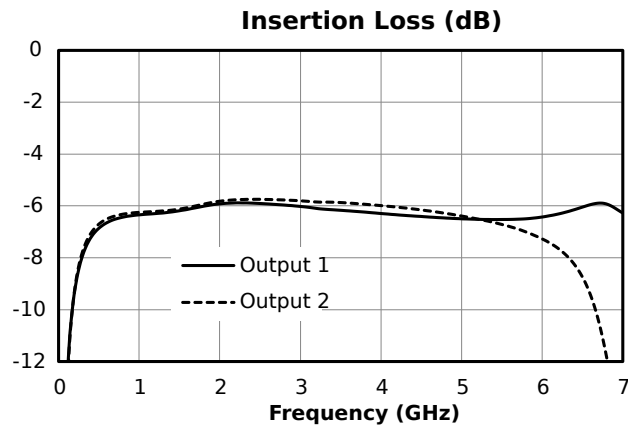

All measurements are de-embedded from the fixture with Automatic Fixture Removal (AFR).


MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1
Balun

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

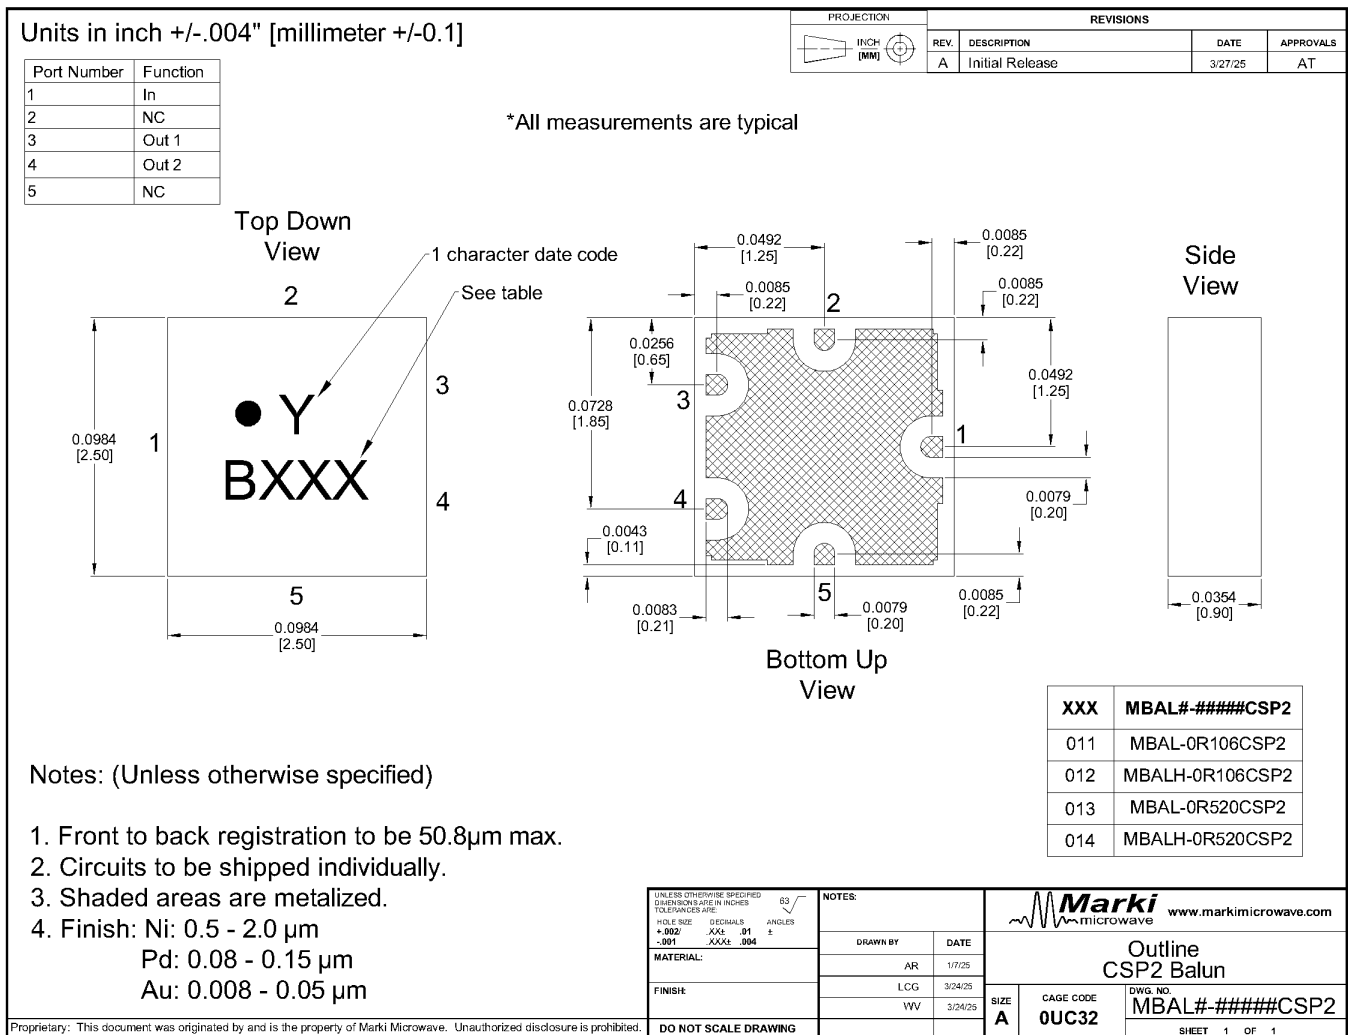

EVb Out- refers to output Out 1


EVb Out+ refers to output Out 2

MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1
Balun

Footprint Image

Download : [Footprint Drawing](#)

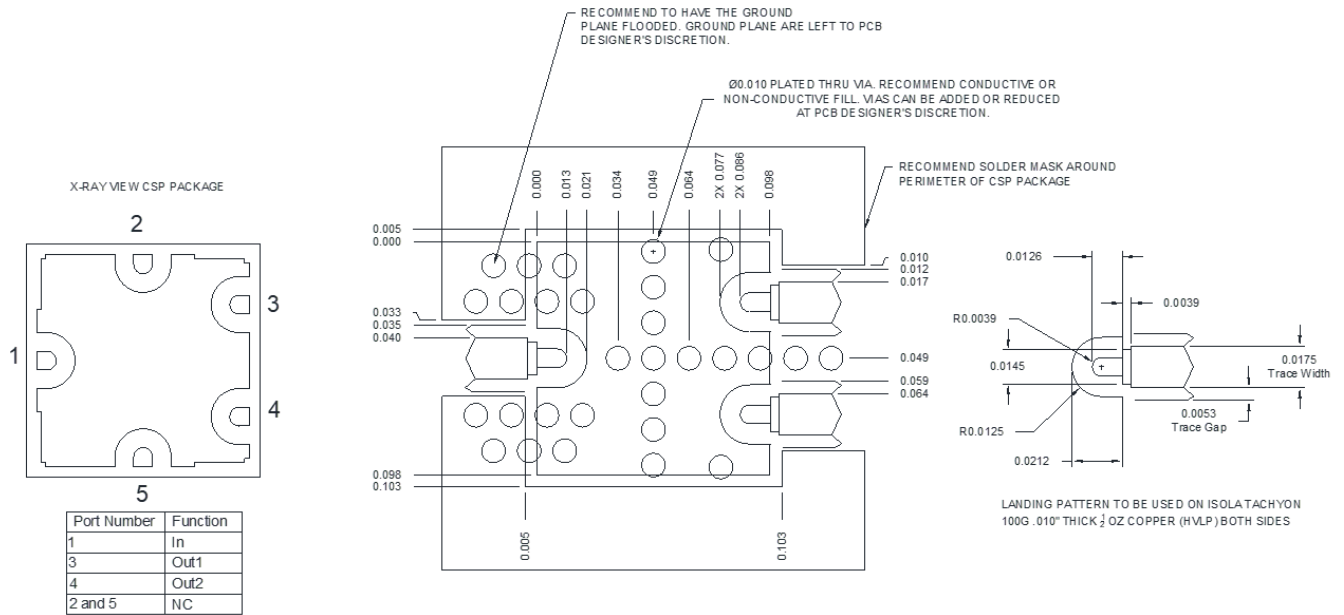


Evaluation Board - Performance Data

Parameter	Test Conditions	Frequency Range (GHz)	Min	Typ	Max	Unit
Impedance Ratio	-	-	-	2	-	-

MBAL-0R106CSP2

0.1-6 GHz Passive MMIC Chip Scale Package 2:1
Balun

Evaluation Board - Outline Drawing

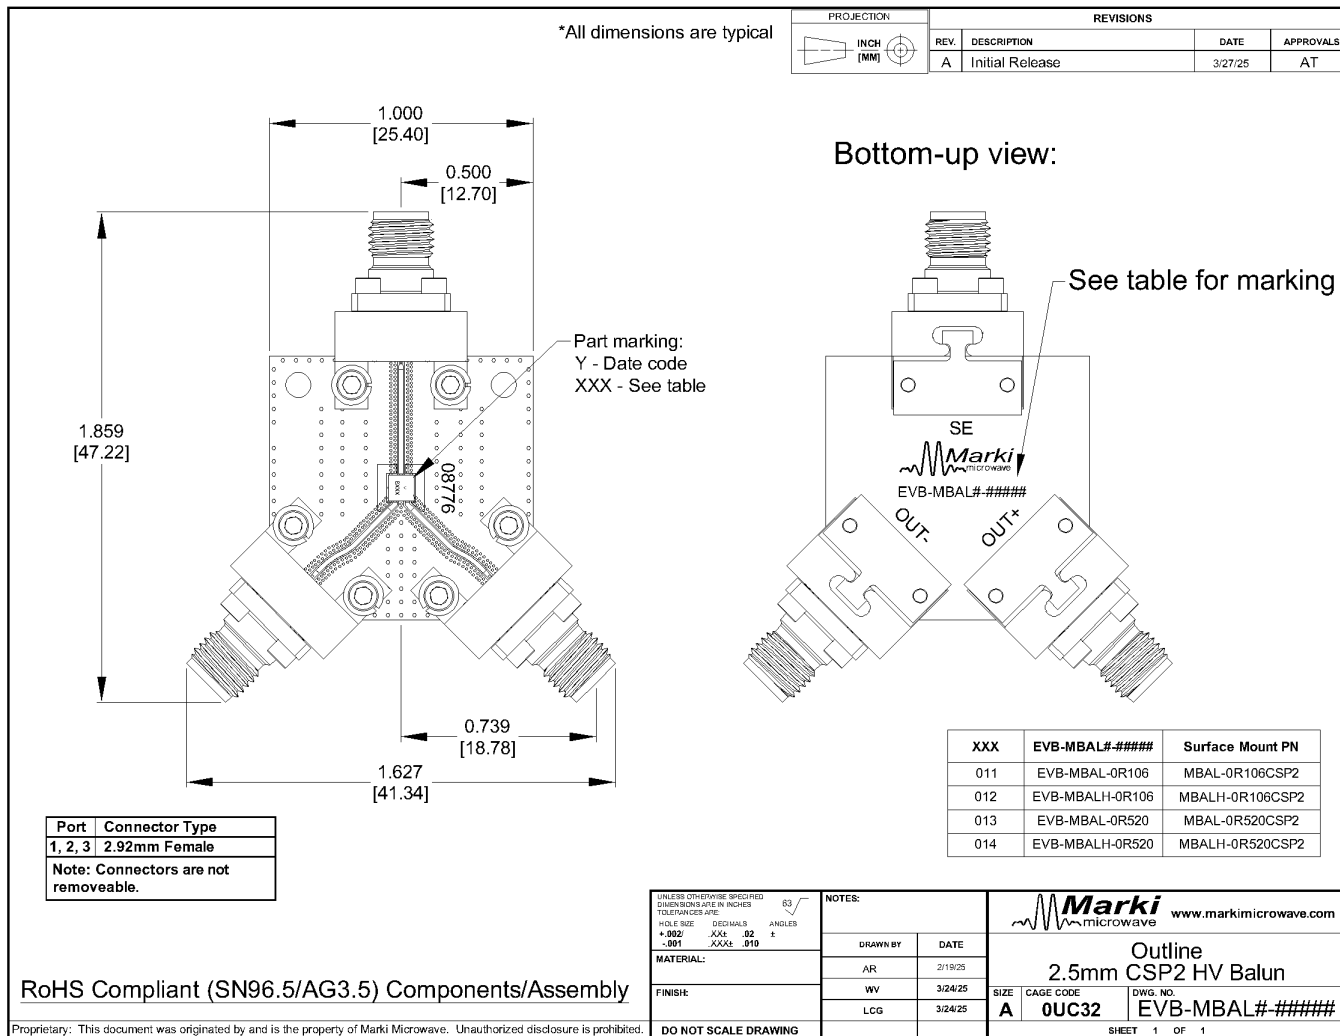

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Marki Microwave](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)