


**MERIT SENSOR 1420 I<sup>2</sup>C COMMUNICATION**

Communications to the 1420 is read only. To read the pressure counts, the master performs a read request by asserting a start condition, sending the 7 bit address of the part (If the part has an open address, 7 bits of anything is acceptable), and sets the read/write bit. The master then waits for an acknowledgment. The acknowledgment is sent by the pressure sensor along with 2 bits of status and bits 13:8 of the pressure counts, the master acknowledges the first 8 bits, and the pressure sensor sends the remaining 8 bits of data. The Master then does not acknowledge and sends a stop condition signaling the end of the transaction.



S	#	#	Status Bits	
RW	A	N	0 0	Normal Operation, Good Packet
ST	SB		0 1	Device in Command Mode
			1 0	Stale Data
			1 1	Diagnostic Condition Exists


\*Used by permission, IDT

**TRANSFER FUNCTION EXAMPLES**

**Example 1: 0.15 PSI Gage**

Part: 1420-P15G-xx11-111


$P_{min} = 0.0 \text{ PSI}$   
 $P_{max} = 0.15 \text{ PSI}$   
 $P_{counts} = 7215$   
 $Max = 16384$   
 $P_{psi} = (P_{max} - P_{min}) \cdot \left( \frac{P_{counts} - 0.1 \cdot Max}{0.8 \cdot Max} \right) + P_{min}$   
 $P_{psi} = (0.15 - 0.0) \cdot \left( \frac{7215 - 0.1 \cdot 16384}{0.8 \cdot 16384} \right) + 0$   
 $P_{psi} = .0638 \text{ Psi}$

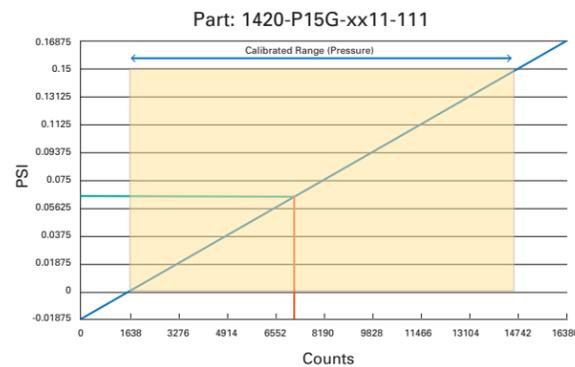

**Example 2: -.5 to .5 PSI Differential**

Part: 1420-P50D-xx11-111

$P_{min} = -0.5 \text{ PSI}$   
 $P_{max} = 0.5 \text{ PSI}$   
 $P_{counts} = 8192$   
 $Max = 16384$   
 $P_{psi} = (P_{max} - P_{min}) \cdot \left( \frac{P_{counts} - 0.1 \cdot Max}{0.8 \cdot Max} \right) + P_{min}$   
 $P_{psi} = (0.5 - (-0.5)) \cdot \left( \frac{8192 - 0.1 \cdot 16384}{0.8 \cdot 16384} \right) + (-0.5)$   
 $P_{psi} = 0.0 \text{ Psi}$

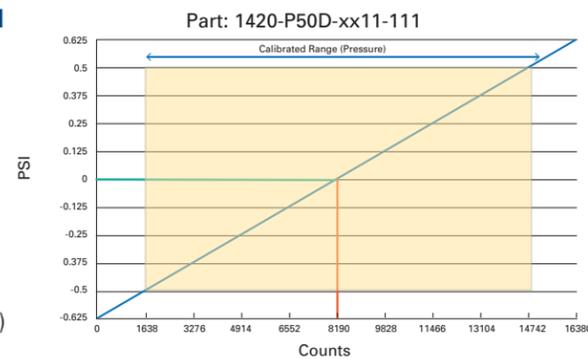


**LP Series - Digital** is a surface mountable pressure sensor package with a compensated digital output suitable for ultra-low pressure sensing applications.

**COMPANY:** Merit Sensor is a leader in piezoresistive pressure sensing and partners with clients to create high performing solutions for a variety of applications and industries.

**SENTIUM:** Merit Sensor products incorporate a proprietary Sentium® technology developed to provide superior stability.

**TECHNOLOGY:** Merit Sensor utilizes a piezoresistive Wheatstone bridge in a design that anodically bonds glass to a chemically etched silicon diaphragm. All products are RoHS compliant.

**CAPABILITIES:** Merit Sensor designs, engineers, fabricates, dices, assembles, tests, and sells die and packaged products from a state-of-the-art facility near Salt Lake City, Utah.

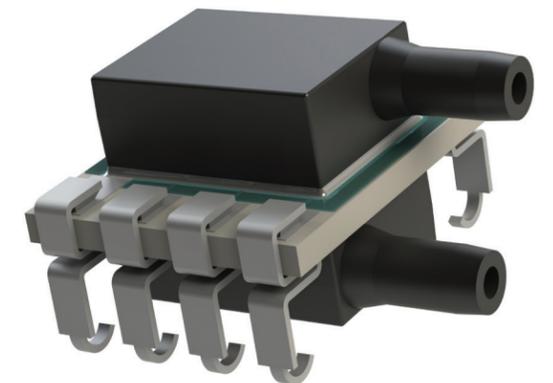

**FEATURES**

Pressure Range	0.04 to 15 psi (2.5 mbar to 1 bar; 250 Pa to 100 kPa KPa; 1 in H <sub>2</sub> O to 415 in H <sub>2</sub> O)
Output	Digital I <sup>2</sup> C
Type	Gage, Differential and Absolute
Media	Clean, Dry Air and Non-corrosive Gases
Packaging	Tape and Reel
Customization	Supply Voltage, Temperature Calibration Range, Output Range, Accuracy Specification, Update Rate, etc

**BENEFITS**

Performance	Enjoy best-in-class performance due to Merit's proprietary Sentium technology
Cost	Save money over time with high-performing die
Security	Feel confident doing business with an experienced company backed by a solid parent company (NASDAQ: MMSI)
Speed	Get to market quickly with creative and flexible solutions
Service	Experience prompt, personal and professional support

**1420 Family Part Number Configurator**

1420-XXXX-XX11-XX1

<p><b>Pressure</b></p> <p>P04 = 250 Pa  P07 = 500 Pa  P15 = .15psi  P30 = .30psi  1P0 = 1.0psi  15P = 15psi</p>	<p><b>Pin Type</b></p> <p>1 = J-lead</p>
<p><b>Reference</b></p> <p>D = Differential  G = Gage  A = Absolute</p>	<p><b>Port</b></p> <p>1 = Dual horizontal, facing same direction  2 = Single Horizontal</p>
<p><b>Clock Speed</b></p> <p>1 = 1MHz</p>	<p><b>Calibrated Supply Voltage</b></p> <p>1 = 5.0V  2 = 3.3V</p>
<p><b>I<sup>2</sup>C Address</b></p> <p>0 = 0x28  1 = 0x38  2 = 0x48  3 = 0x58  4 = 0x68  5 = 0x78  6 = Open*</p>	<p><b>Update Rate</b></p> <p>1 = 25ms</p>
	<p><b>Operation Mode</b></p> <p>1 = Update mode constant</p>

\*Device will respond to any address.


SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units	Notes
<b>Electrical</b>					
Supply Voltage (Vs)	4.5	5	5.5	V	Depending on calibrated supply voltage
Supply Voltage (Vs)	3.0	3.3	3.6	V	Depending on calibrated supply voltage
Supply Current	1.2	2	3.5	mA	(1)
Operating Temperature	-40		85	°C	
Storage Temperature	-55		100	°C	
<b>Performance</b>					
Effective ADC Resolution		13		Bits	
Pressure Accuracy	-1.5		1.5	%FS	(2) (3)
Long-Term Stability	-0.5		0.5	%FS	
Startup Time		10.4	12	ms	
Digital Update Time	21	25	29	ms	
Proof Pressure	5X				(4)
Burst Pressure	10X				
<b>Transfer Function Formula</b>					
$P_{psi} = (P_{max} - P_{min}) \cdot \left( \frac{P_{counts} - 0.1 \cdot Max}{0.8 \cdot Max} \right) + P_{min}$				<b>Where</b> $P_{psi}$ = Measured Pressure in PSI $P_{counts}$ = Pressure Counts from Merit Sensor Part $P_{Min}$ = Minimum Pressure $P_{Max}$ = Maximum Pressure Max = 16384 = 14 Bits	
<b>Media Compatibility</b>					
For Use With Non-corrosive Dry Gasses					
Solder temperature: max 250 °C, 5 seconds max					

**Notes:**  
(1) @5V input voltage,  
(2) Over 0°C to 60°C  
(3) Applicable if Vs = ±5% of the calibrated Vs  
(4) Full scale pressure

DIMENSIONS FOR STANDARD OPTIONS (in millimeters)


Dimensions for reference only. Engineering drawings (with tolerance) available upon order.

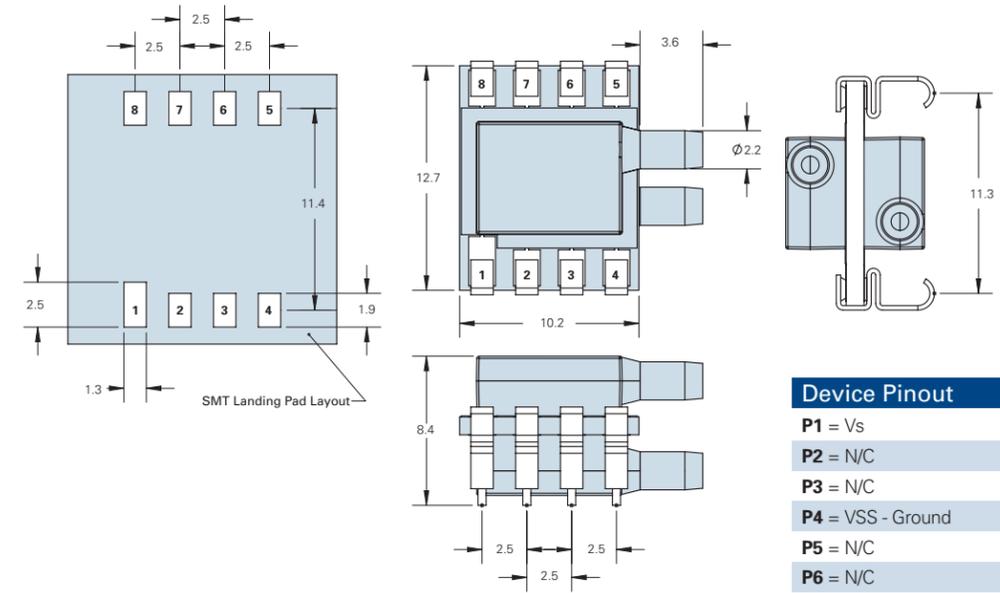


**Device Pinout**

- P1 = Vs
- P2 = N/C
- P3 = N/C
- P4 = VSS - Ground
- P5 = N/C
- P6 = N/C
- P7 = SDA - I<sup>2</sup>C data
- P8 = SCL - I<sup>2</sup>C clock


CROSS SECTION FOR DIFFERENTIAL AND GAGE

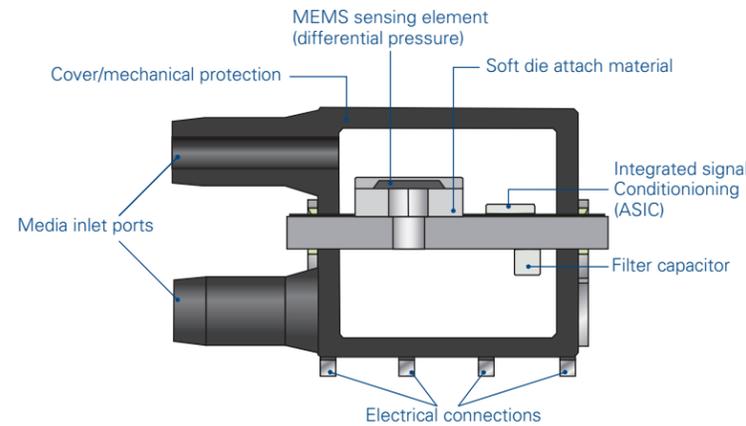

CROSS SECTION FOR ABSOLUTE

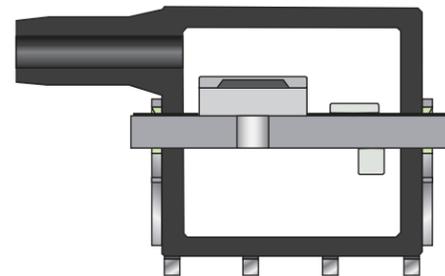


PACKAGING

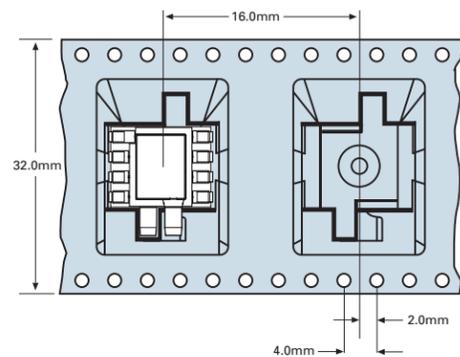

ELECTRICAL

Note: Power supply decoupling included

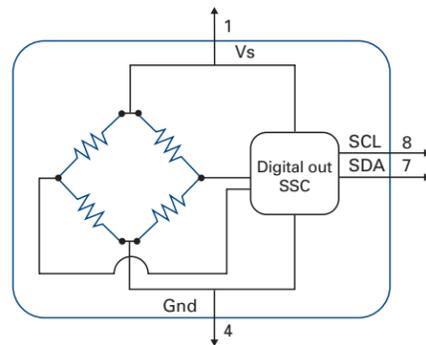


I<sup>2</sup>C PARAMETERS \*

Parameter	Symbol	Min	Typ	Max	Units
SCL clock frequency	f <sub>SCL</sub>	-		100	kHz
Start condition hold time relative to SCL edge	t <sub>HDSTA</sub>	0.1			µs
Minimum SCL clock low width <sup>1</sup>	t <sub>LOW</sub>	0.6			µs
Minimum SCL clock high width <sup>1</sup>	t <sub>HIGH</sub>	0.6			µs
Start condition setup time relative to SCL edge	t <sub>SUSTA</sub>	0.1			µs
Data hold time on SDA relative to SCL edge	t <sub>HDDAT</sub>	0.0			µs
Data setup time on SDA relative to SCL edge	t <sub>SUDAT</sub>	0.1			µs
Stop condition setup time on SCL	t <sub>SUSTO</sub>	0.1			µs
Bus free time between stop condition and start condition	t <sub>BUS</sub>	2			µs

<sup>1</sup>Combined low and high widths must equal or exceed minimum SCLK period.

I<sup>2</sup>C TIMING DIAGRAM\*

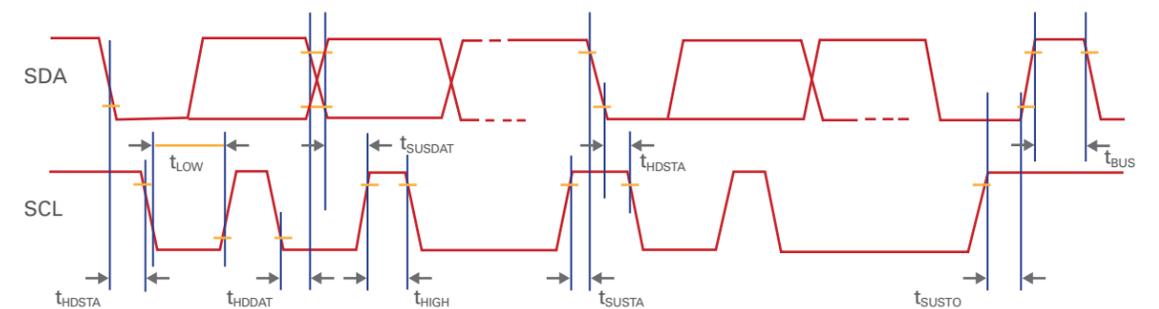


**SPECIFICATIONS**

Parameter	Minimum	Typical	Maximum	Units	Notes
<b>Electrical</b>					
Supply Voltage (Vs)	4.5	5	5.5	V	Depending on calibrated supply voltage
Supply Voltage (Vs)	3.0	3.3	3.6	V	Depending on calibrated supply voltage
Supply Current	1.2	2	3.5	mA	(1)
Operating Temperature	-40		85	°C	
Storage Temperature	-55		100	°C	
<b>Performance</b>					
Effective ADC Resolution		13		Bits	
Pressure Accuracy	-1.5		1.5	%FS	(2) (3)
Long-Term Stability	-0.5		0.5	%FS	
Startup Time		10.4	12	ms	
Digital Update Time	21	25	29	ms	
Proof Pressure	5X				(4)
Burst Pressure	10X				
<b>Transfer Function Formula</b>					
$P_{psi} = (P_{max} - P_{min}) \cdot \left( \frac{P_{counts} - 0.1 \cdot Max}{0.8 \cdot Max} \right) + P_{min}$				<b>Where</b> $P_{psi}$ = Measured Pressure in PSI $P_{counts}$ = Pressure Counts from Merit Sensor Part $P_{Min}$ = Minimum Pressure $P_{Max}$ = Maximum Pressure Max = 16384 = 14 Bits	
<b>Media Compatibility</b>					
For Use With Non-corrosive Dry Gasses					
Solder temperature: max 250 °C, 5 seconds max					

**Notes:**  
(1) @5V input voltage,  
(2) Over 0°C to 60°C  
(3) Applicable if Vs = ±5% of the calibrated Vs  
(4) Full scale pressure

**DIMENSIONS FOR STANDARD OPTIONS (in millimeters)**


Dimensions for reference only. Engineering drawings (with tolerance) available upon order.

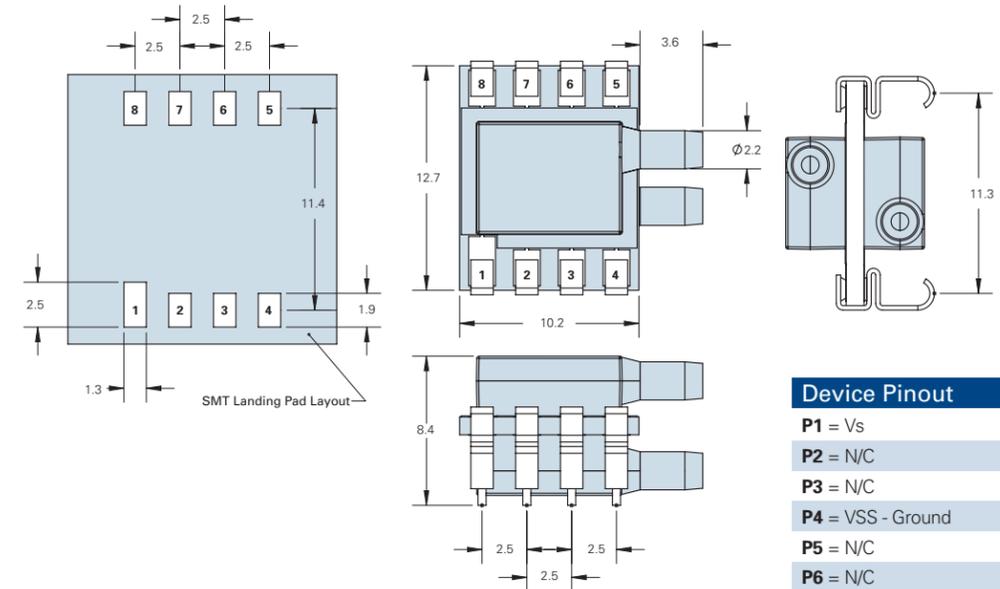


**Device Pinout**

- P1 = Vs
- P2 = N/C
- P3 = N/C
- P4 = VSS - Ground
- P5 = N/C
- P6 = N/C
- P7 = SDA - I<sup>2</sup>C data
- P8 = SCL - I<sup>2</sup>C clock


**CROSS SECTION FOR DIFFERENTIAL AND GAGE**

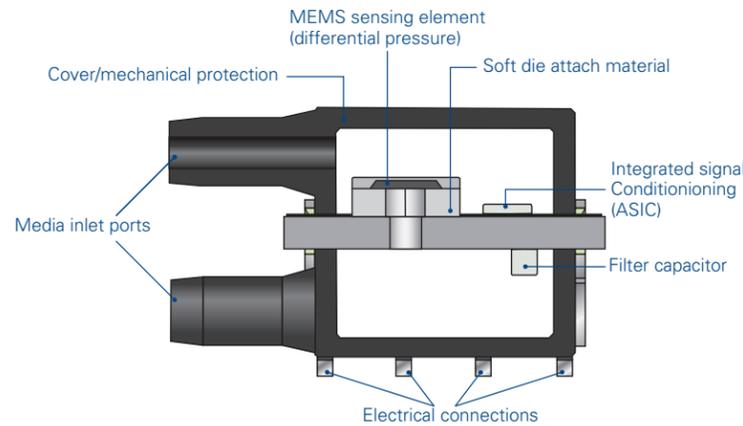

**CROSS SECTION FOR ABSOLUTE**

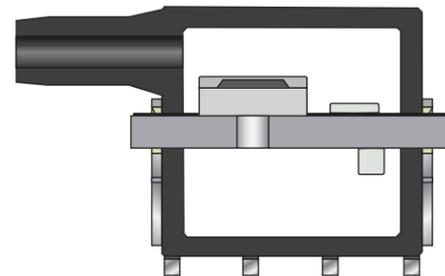


**PACKAGING**

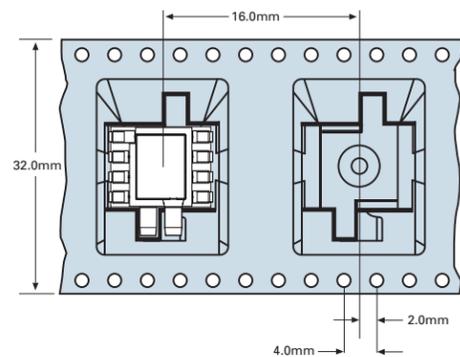

**ELECTRICAL**

Note: Power supply decoupling included

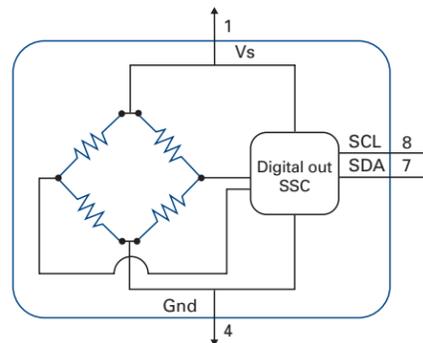


**I<sup>2</sup>C PARAMETERS \***

Parameter	Symbol	Min	Typ	Max	Units
SCL clock frequency	f <sub>SCL</sub>	-		100	kHz
Start condition hold time relative to SCL edge	t <sub>HDSTA</sub>	0.1			µs
Minimum SCL clock low width <sup>1</sup>	t <sub>LOW</sub>	0.6			µs
Minimum SCL clock high width <sup>1</sup>	t <sub>HIGH</sub>	0.6			µs
Start condition setup time relative to SCL edge	t <sub>SUSTA</sub>	0.1			µs
Data hold time on SDA relative to SCL edge	t <sub>HDDAT</sub>	0.0			µs
Data setup time on SDA relative to SCL edge	t <sub>SUDAT</sub>	0.1			µs
Stop condition setup time on SCL	t <sub>SUSTO</sub>	0.1			µs
Bus free time between stop condition and start condition	t <sub>BUS</sub>	2			µs


<sup>1</sup>Combined low and high widths must equal or exceed minimum SCLK period.

**I<sup>2</sup>C TIMING DIAGRAM\***

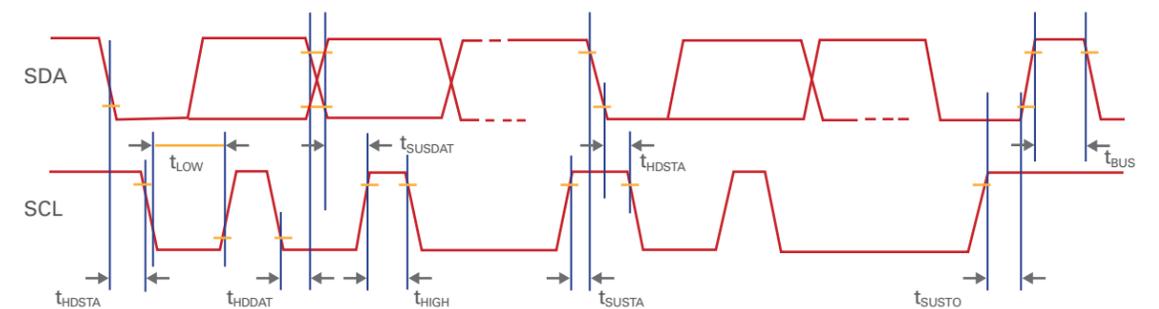

**MERIT SENSOR 1420 I<sup>2</sup>C COMMUNICATION**

Communications to the 1420 is read only. To read the pressure counts, the master performs a read request by asserting a start condition, sending the 7 bit address of the part (If the part has an open address, 7 bits of anything is acceptable), and sets the read/write bit. The master then waits for an acknowledgment. The acknowledgment is sent by the pressure sensor along with 2 bits of status and bits 13:8 of the pressure counts, the master acknowledges the first 8 bits, and the pressure sensor sends the remaining 8 bits of data. The Master then does not acknowledge and sends a stop condition signaling the end of the transaction.



<b>S</b> Start Conditioning	<b>#</b> Device Slave Address	<b>#</b> Data Bit	<b>0 0</b> Normal Operation, Good Packet
<b>RW</b> Read/Write Bit	<b>A</b> Acknowledge Bit	<b>N</b> No Acknowledge Bit	<b>0 1</b> Device in Command Mode
<b>ST</b> Stop Condition	<b>SB</b> Status Bits		<b>1 0</b> Stale Data
			<b>1 1</b> Diagnostic Condition Exists

\*Used by permission, IDT

**TRANSFER FUNCTION EXAMPLES**

**Example 1: 0.15 PSI Gage**

Part: 1420-P15G-xx11-111

$$P_{min} = 0.0 \text{ PSI}$$

$$P_{max} = 0.15 \text{ PSI}$$


$$P_{counts} = 7215$$

$$Max = 16384$$

$$P_{psi} = (P_{max} - P_{min}) \cdot \left( \frac{P_{counts} - 0.1 \cdot Max}{0.8 \cdot Max} \right) + P_{min}$$

$$P_{psi} = (0.15 - 0.0) \cdot \left( \frac{7215 - 0.1 \cdot 16384}{0.8 \cdot 16384} \right) + 0$$

$$P_{psi} = .0638 \text{ Psi}$$

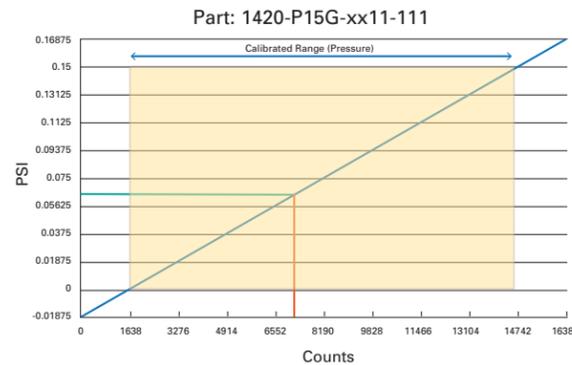

**Example 2: -.5 to .5 PSI Differential**

Part: 1420-P50D-xx11-111

$$P_{min} = -0.5 \text{ PSI}$$

$$P_{max} = 0.5 \text{ PSI}$$


$$P_{counts} = 8192$$

$$Max = 16384$$

$$P_{psi} = (P_{max} - P_{min}) \cdot \left( \frac{P_{counts} - 0.1 \cdot Max}{0.8 \cdot Max} \right) + P_{min}$$

$$P_{psi} = (0.5 - (-0.5)) \cdot \left( \frac{8192 - 0.1 \cdot 16384}{0.8 \cdot 16384} \right) + (-0.5)$$

$$P_{psi} = 0.0 \text{ Psi}$$

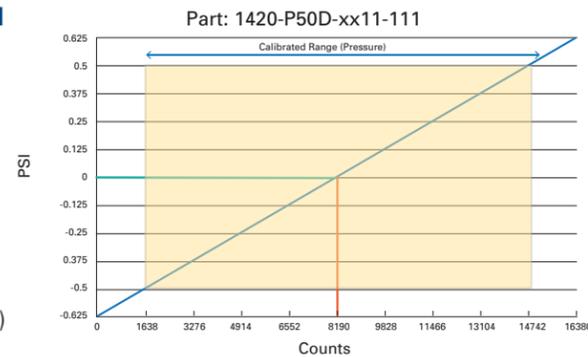


**LP Series - Digital** is a surface mountable pressure sensor package with a compensated digital output suitable for ultra-low pressure sensing applications.

**COMPANY:** Merit Sensor is a leader in piezoresistive pressure sensing and partners with clients to create high performing solutions for a variety of applications and industries.

**SENTIUM:** Merit Sensor products incorporate a proprietary Sentium® technology developed to provide superior stability.

**TECHNOLOGY:** Merit Sensor utilizes a piezoresistive Wheatstone bridge in a design that anodically bonds glass to a chemically etched silicon diaphragm. All products are RoHS compliant.

**CAPABILITIES:** Merit Sensor designs, engineers, fabricates, dices, assembles, tests, and sells die and packaged products from a state-of-the-art facility near Salt Lake City, Utah.

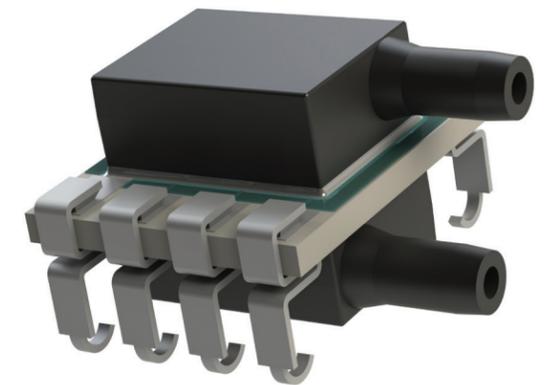

**FEATURES**

<b>Pressure Range</b>	0.04 to 15 psi (2.5 mbar to 1 bar; 250 Pa to 100 kPa KPa; 1 in H <sub>2</sub> O to 415 in H <sub>2</sub> O)
<b>Output</b>	Digital I <sup>2</sup> C
<b>Type</b>	Gage, Differential and Absolute
<b>Media</b>	Clean, Dry Air and Non-corrosive Gases
<b>Packaging</b>	Tape and Reel
<b>Customization</b>	Supply Voltage, Temperature Calibration Range, Output Range, Accuracy Specification, Update Rate, etc

**BENEFITS**

<b>Performance</b>	Enjoy best-in-class performance due to Merit's proprietary Sentium technology
<b>Cost</b>	Save money over time with high-performing die
<b>Security</b>	Feel confident doing business with an experienced company backed by a solid parent company (NASDAQ: MMSI)
<b>Speed</b>	Get to market quickly with creative and flexible solutions
<b>Service</b>	Experience prompt, personal and professional support

**1420 Family Part Number Configurator**

1420-XXXX-XX11-XX1

<p><b>Pressure</b></p> <p>P04 = 250 Pa P07 = 500 Pa P15 = .15psi P30 = .30psi 1P0 = 1.0psi 15P = 15psi</p> <p><b>Reference</b></p> <p>D = Differential G = Gage A = Absolute</p> <p><b>Clock Speed</b></p> <p>1 = 1MHz</p> <p><b>I<sup>2</sup>C Address</b></p> <p>0 = 0x28 1 = 0x38 2 = 0x48 3 = 0x58 4 = 0x68 5 = 0x78 6 = Open*</p>	<p><b>Pin Type</b></p> <p>1 = J-lead</p> <p><b>Port</b></p> <p>1 = Dual horizontal, facing same direction 2 = Single Horizontal</p> <p><b>Calibrated Supply Voltage</b></p> <p>1 = 5.0V 2 = 3.3V</p> <p><b>Update Rate</b></p> <p>1 = 25ms</p> <p><b>Operation Mode</b></p> <p>1 = Update mode constant</p>
--	---

\*Device will respond to any address.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board Mount Pressure Sensors](#) category:*

*Click to view products by [Merit Sensor](#) manufacturer:*

Other Similar products are found below :

[6407-249V-17343P](#) [6407-250V-09273P](#) [80527-25.0H2-05](#) [80541-B00000150-01](#) [80541-B00000200-05](#) [80554-00700100-05](#) [80568-00300050-01](#) [93.631.4253.0](#) [93.731.4353.0](#) [93.932.4553.0](#) [136PC150G2](#) [136PC15A1](#) [142PC95AW71](#) [142PC05DW70](#) [15PSI-G-4V](#) [1805-01A-L0N-B](#) [26PCBKT](#) [26PCCFA6D26](#) [26PCCFS2G](#) [26PCCVA6D](#) [93.632.7353.0](#) [93.731.3653.0](#) [93.931.4853.0](#) [93.932.4853.0](#) [SCDA120-XSC05DC](#) [185PC30DH](#) [20INCH-G-MV-MINI](#) [26PCAFJ3G](#) [26PCCEP5G24](#) [26PCDFA3G](#) [26PCJEU5G19](#) [ASCX15AN-90](#) [TSCSAAN001PDUCV](#) [DCAL401DN](#) [DCAL401GN](#) [XZ202798SSC](#) [XZ203676HSC](#) [6407-249V-09343P](#) [6407-250V-17343P](#) [SP370-25-116-0](#) [81794-B00001200-01](#) [HSCDLNN100PGAA5](#) [82681-B00000100-01](#) [81618-B00000040-05](#) [SSCDJNN015PAAA5](#) [TSCDLNN100MDUCV](#) [TSCSAAN100PDUCV](#) [NBPDANN015PGUNV](#) [NBPLLNS150PGUNV](#) [142PC100D](#)