



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE121

Germanium PNP Transistor

Audio Frequency Power Amplifier

Description:

The NTE121 is a Germanium PNP Alloy Junction transistor in a TO3 type package designed as an audio frequency power output amplifier.



Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector-Base Voltage, V_{CBO}	60V
Collector-Emitter Voltage ($R_{BE} = 68\Omega$), V_{CER}	45V
Emitter-Base Voltage, V_{EBO}	10V
Collector Current, I_C	10A
Emitter Current, I_E	10A
Base Current, I_B	3A
Power Dissipation ($T_C \leq +55^\circ\text{C}$), P_D	90W
Operating Junction Temperature, T_J	$+100^\circ\text{C}$
Storage Temperature Range, T_{stg}	-55° to $+100^\circ\text{C}$

Note 1. Matched pairs are available upon request (NTE121MP). Matched pairs have their gain specification (h_{FE}) matched to within 10% of each other.

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Emitter Breakdown Voltage	$V_{(BR)CER}$	$I_{C(peak)} = -0.6A$, $R_{BE} = 68\Omega$	45	—	—	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 30V$, $I_E = 0$	—	—	0.5	mA
DC Current Gain	h_{FE}	$V_{CE} = 2V$, $I_C = 1A$	50	90	165	
Base-Emitter Input Voltage	V_{BE}	$V_{CE} = 2V$, $I_C = 1A$	—	0.38	—	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10A$, $I_B = 1A$	—	0.3	—	V
Transition Frequency	f_T	$V_{CB} = 2V$, $I_E = 1A$	—	300	—	kHz

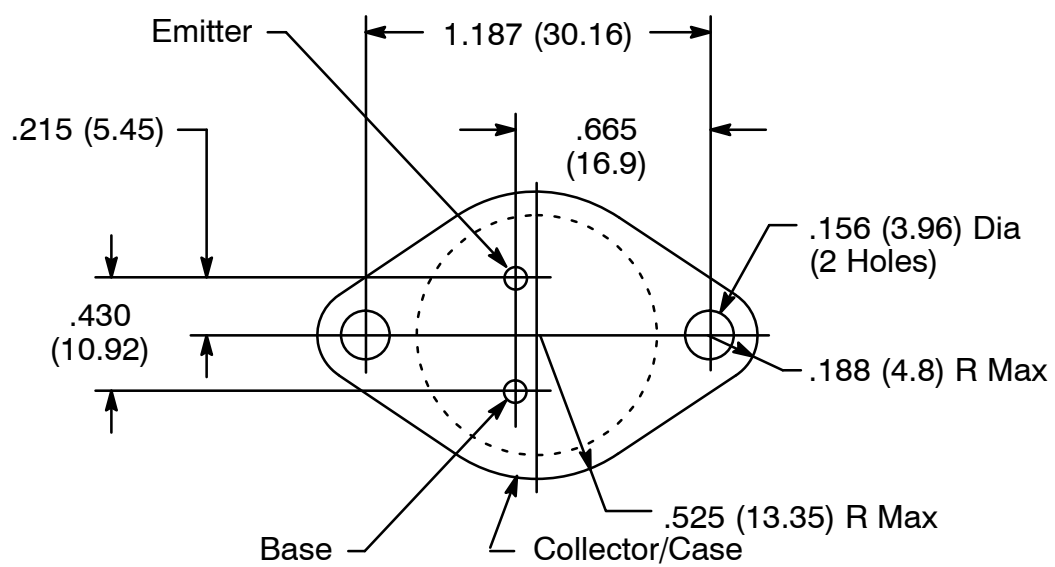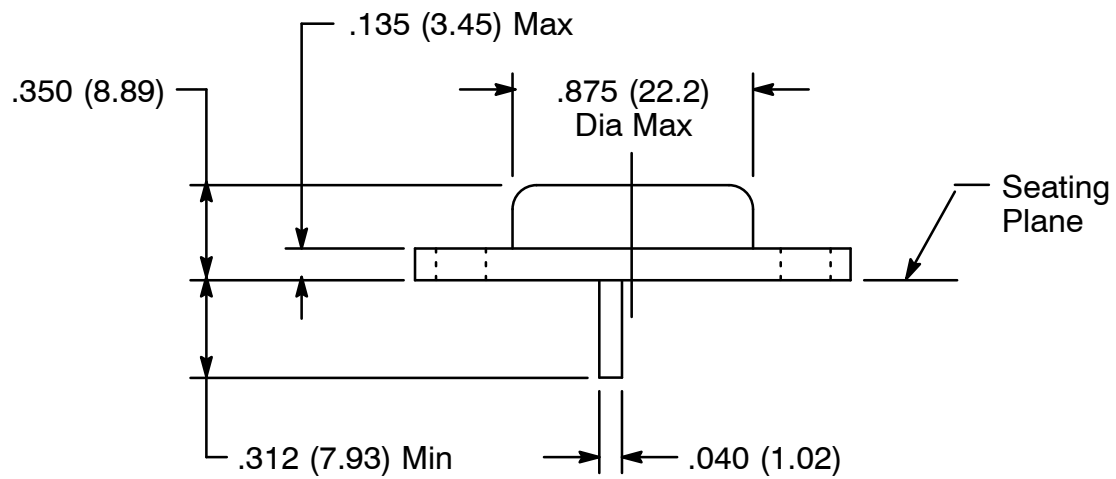

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT](#) ***category:***

Click to view products by [NTE](#) ***manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [2N2369ADCSM](#)
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3583](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#) [NTE15](#) [NTE16001](#) [NTE16006](#)
[NTE26](#)