

### Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



### MJE170/171/172

Low Power Audio Amplifier Low Current, High Speed Switching Applications



### **PNP Epitaxial Silicon Transistor**

### **Absolute Maximum Ratings** T<sub>C</sub>=25°C unless otherwise noted

Symbol	Paramet	er	Value	Units
V <sub>CBO</sub>	Collector-Base Voltage	: MJE170	- 60	V
		: MJE171	- 80	V
		: MJE172	- 100	V
V <sub>CEO</sub>	Collector-Emitter Voltage	: MJE170	- 40	V
		: MJE171	- 60	V
		: MJE172	- 80	V
V <sub>EBO</sub>	Emitter-Base Voltage		- 7	V
I <sub>C</sub>	Collector Current (DC)		- 3	Α
I <sub>CP</sub>	Collector Current (Pulse)		- 6	Α
I <sub>B</sub>	Base Current		- 1	Α
P <sub>C</sub>	Collector Dissipation (T <sub>C</sub> =25°C)		12.5	W
	Collector Dissipation (T <sub>a</sub> =25°C)		1.5	W
TJ	Junction Temperature		150	°C
T <sub>STG</sub>	Storage Temperature		- 65 ~ 150	°C

### Electrical Characteristics T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Max.	Units
BV <sub>CEO</sub>	Collector-Emitter Breaksown Voltage : MJE170 : MJE171 : MJE172	I <sub>C</sub> = 10mA, I <sub>B</sub> = 0	-40 -60 -80		V V V
Ісво	Collector Cut-off Current : MJE170 : MJE171 : MJE172 : MJE170 : MJE170 : MJE171 : MJE171 : MJE172	$\begin{split} &V_{CB} = -60 \text{V}, I_B = 0 \\ &V_{CB} = -80 \text{V}, I_E = 0 \\ &V_{CB} = -100 \text{V}, I_E = 0 \\ &V_{CB} = -60 \text{V}, I_E = 0, @T_C = 150 ^{\circ}\text{C} \\ &V_{CB} = -80 \text{V}, I_E = 0, @T_C = 150 ^{\circ}\text{C} \\ &V_{CB} = -100 \text{V}, I_E = 0, @T_C = 150 ^{\circ}\text{C} \end{split}$		-0.1 -0.1 -0.1 -0.1 -0.1	μΑ μΑ μΑ mA mA
I <sub>EBO</sub>	Emitter Cut-off Current	$V_{BE} = -7V, I_{C} = 0$		-0.1	μΑ
h <sub>FE</sub>	DC Current Gain	$V_{CE} = -1V$ , $I_{C} = -100$ mA $V_{CE} = -1V$ , $I_{C} = -500$ mA $V_{CE} = -1V$ , $I_{C} = -1.5$ A	50 30 12	250	
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> = - 500mA, I <sub>B</sub> = - 50mA I <sub>C</sub> = - 1.5A, I <sub>B</sub> = - 150mA I <sub>C</sub> = - 3A, I <sub>B</sub> = - 600mA		-0.3 -0.9 -1.7	V V V
V <sub>BE</sub> (sat)	Base-Emitter Saturation Voltage	I <sub>C</sub> = - 1.5A, I <sub>B</sub> = - 150mA I <sub>C</sub> = - 3A, I <sub>B</sub> = - 600mA		-1.5 -2.0	V V
V <sub>BE</sub> (on)	Base-Emitter ON Voltage	V <sub>CE</sub> = - 1V, I <sub>C</sub> = - 500mA		-1.2	V
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> = - 10V, I <sub>C</sub> = - 100mA	50		MHz
C <sub>ob</sub>	Output Capacitance	$V_{CB} = -10V, I_E = 0, f = 0.1MHz$		50	pF

## **Typical Charactristics**

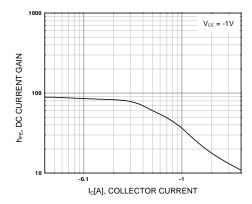


Figure 1. DC current Gain

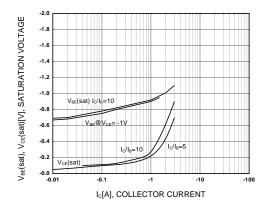


Figure 2. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

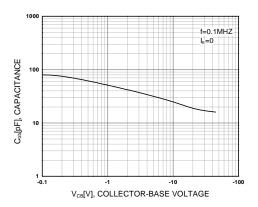


Figure 3. Collector Output Capacitance

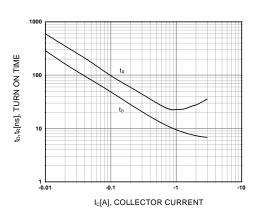


Figure 4. Turn On Time

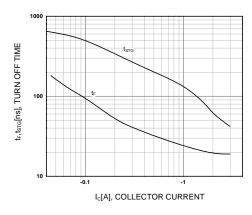


Figure 5. Turn Off Time

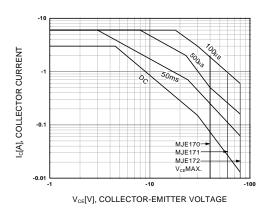


Figure 6. Safe Operating Area

©2001 Fairchild Semiconductor Corporation Rev. A2, June 2001

# Typical Characteristics (Continued)



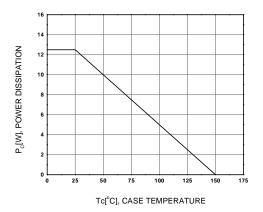


Figure 7. DC current Gain

# **Package Demensions**

TO-126

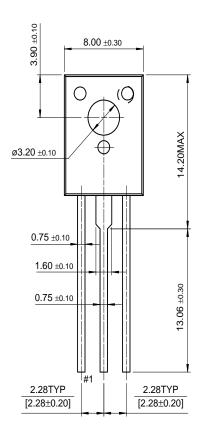

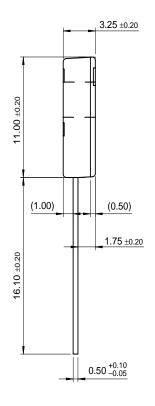



Dimensions in Millimeters

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST <sup>®</sup>	OPTOPLANAR™	STAR*POWER™
Bottomless™	FASTr™	PACMAN™	Stealth™
CoolFET™	FRFET™	POP™	SuperSOT™-3
CROSSVOLT™	GlobalOptoisolator™	Power247™	SuperSOT™-6
DenseTrench™	GTO™	PowerTrench <sup>®</sup>	SuperSOT™-8
DOME™	HiSeC™	QFET™	SyncFET™
EcoSPARK™	ISOPLANAR™	QS™	TruTranslation™
E <sup>2</sup> CMOS™	LittleFET™	QT Optoelectronics™	TinyLogic™
EnSigna™	MicroFET™	Quiet Series™	UHC™
FACT™	MICROWIRE™	SLIENT SWITCHER®	UltraFET <sup>®</sup>
FACT Quiet Series™	OPTOLOGIC™	SMART START™	VCX™

STAR\*POWER is used under license

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2001 Fairchild Semiconductor Corporation Rev. H

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below:

619691C MCH4017-TL-H BC546/116 BC557/116 BSW67A NTE158 NTE187A NTE195A NTE2302 NTE2330 NTE63 C4460

2SA1419T-TD-H 2SA1721-O(TE85L,F) 2SA2126-E 2SB1204S-TL-E 2SC5488A-TL-H 2SD2150T100R SP000011176 FMMTA92QTA

2N2369ADCSM 2SC2412KT146S 2SC5490A-TL-H 2SD1816S-TL-E 2SD1816T-TL-E CMXT2207 TR CPH6501-TL-E MCH4021-TL-E

US6T6TR 732314D CMXT3906 TR CPH3121-TL-E CPH6021-TL-H 873787E UMX21NTR EMT2T2R MCH6102-TL-E FP204-TL-E

NJL0302DG 2N3583 2SA1434-TB-E 2SC3143-4-TB-E 2SD1621S-TD-E NTE103 30A02MH-TL-E NSV40301MZ4T1G NTE101 NTE13

NTE15 NTE16001