


Precision Thick Film Chip Resistors

ERJ type

ERJ XG, 1G series

ERJ 1R, 2R, 3R, 6R series

ERJ 3E, 6E, 8E, 14, 12, 1T series

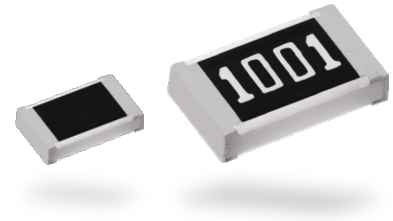

(Oct. 2021) Products marked as "NRFND" are not recommended for new design.
Target products : ERJ8E, 14, 12, 1Tseries
Please refer to the recommended alternatives with
"Design Support Tool" .


Features

- Small size and lightweight
- High reliability : Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines : Taping packaging available
- Suitable for both reflow and flow soldering
- Low resistance tolerance : ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T series : $\pm 1\%$
ERJ1R, 2R, 3R, 6R series : $\pm 0.5\%$
- Reference standard : IEC 60115-8, JIS C 5201-8, JEITA RC-2134C
- AEC-Q200 compliant (except ERJ1R, ERJXG, ERJ1GN)
- RoHS compliant

■ As for packaging methods, land pattern, soldering conditions and safety precautions, please see data files.

Explanation of part numbers

- ERJ1R, 2R, 3R, 6R series : $\pm 0.5\%$

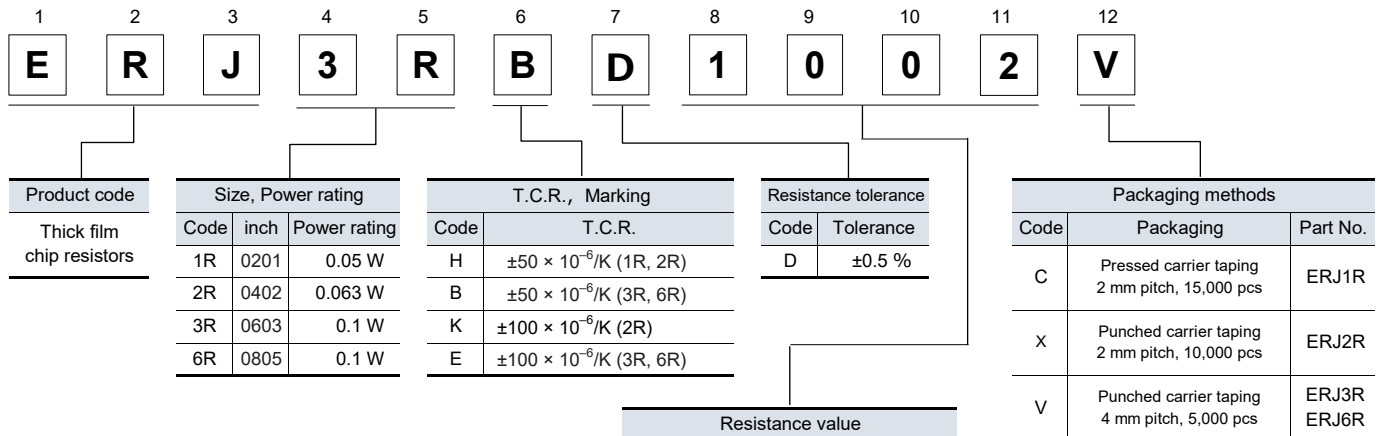

Explanation of part numbers

- ERJXGN, 1GN, 1GJ, 2RC, 2RK, 3EK, 6EN, 8EN, 14N, 12N, 12S, 1TN series : ±1 %

1	2	3	4	5	6	7	8	9	10	11	12		
E	R	J	8	E	N	F	1	0	0	2	V		
Product code		Size, Power rating			Resistance tolerance		Resistance value				Packaging methods		
Thick film chip resistors		Code	inch	Power rating	Code	Tolerance	The first three digits are significant figures of resistance and the last one denotes number of zeros following. Decimal point is expressed by "R". Example : 1002 → 10 kΩ				Code	Packaging	Part No.
	XGN	01005	0.031 W	F	±1 %	Y					Pressed carrier taping W8P2, 20,000 pcs	ERJXGN	
	1GN	0201	0.05 W			U					Embossed carrier taping W4P1, 40,000 pcs		
NEW	1GJ		0.1 W			C					Pressed carrier taping 2 mm pitch, 15,000 pcs	ERJ1GN ERJ1GJ	
	2RC	0402	0.1 W			X					Punched carrier taping 2 mm pitch, 10,000 pcs	ERJ2RC ERJ2RK	
	2RK	0402	0.1 W			V					Punched carrier taping 4 mm pitch, 5,000 pcs	ERJ3EK ERJ6EN ERJ8EN	
	3EK	0603	0.1 W			NRFND					U	Embossed carrier taping 4 mm pitch, 5,000 pcs	ERJ14N ERJ12N ERJ12S
	6EN	0805	0.125 W								Embossed carrier taping 4 mm pitch, 4,000 pcs	ERJ1TN	
NRFND	8EN	1206	0.25 W										
NRFND	14N	1210	0.5 W										
NRFND	12N	1812	0.75 W										
NRFND	12S	2010	0.75 W										
NRFND	1TN	2512	1 W										

* For the automotive application, please use ERJ1GJ as 0201 inch size from the new design.

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

NRFND

* For the automotive application, please use ERJ1GJ as 0201 inch size from the new design.

NRFND Not recommended for new design

Ratings

<±0.5 %>

Part No. (inch size)	Rated power* ¹ (70 °C) (W)	Limiting element voltage* ² (V)	Maximum overload voltage* ³ (V)	Resistance tolerance (%)	Resistance range (Ω)	T.C.R. (×10 ⁻⁶ /K)	Category temperature range (°C)	AEC-Q200 Grade
ERJ1RH (0201)	0.05	15	30	±0.5	1 k to 1 M (E24,E96)	±50	-55 to +125	-
ERJ2RH (0402)	0.063	50	100	±0.5	100 to 100 k (E24,E96)	±50	-55 to +155	Grade 0
ERJ2RK (0402)	0.063	50	100	±0.5	10 to 97.6 102 k to 1 M (E24,E96)	±100		
ERJ3RB (0603)	0.1	75	150	±0.5	100 to 100 k (E24,E96)	±50		
ERJ3RE (0603)	0.1	75	150	±0.5	10 to 97.6 102 k to 1 M (E24,E96)	±100		
ERJ6RB (0805)	0.1	150	200	±0.5	100 to 100 k (E24,E96)	±50		
ERJ6RE (0805)	0.1	150	200	±0.5	10 to 97.6 102 k to 1 M (E24,E96)	±100		

*1 : Use it on the condition that the case temperature is below the upper category temperature.

*2 : Rated continuous working voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Power rating} \times \text{Resistance value}}$, or limiting element voltage listed above, whichever less.

*3 : Overload test voltage (OTV) shall be determined from $OTV = \text{specified magnification (refer to performance)} \times RCWV$ or maximum overload voltage listed above, whichever less.

Ratings

<±1 %>

Part No. (inch size)	Power rating ^{*1} (70 °C) (W)	Limiting element voltage ^{*2} (V)	Maximum overload voltage ^{*3} (V)	Resistance tolerance (%)	Resistance range (Ω)	T.C.R. (×10 ⁻⁶ /K)	Category temperature range (°C)	AEC-Q200 Grade
ERJXGN (01005)	0.031	15	30	±1	10 to 1 M ^{*4} (E24,E96)	R < 100 Ω : ±300 100 Ω ≤ R : ±200	-55 to +125	-
ERJ1GN (0201)	0.05	25	50	±1	10 to 1 M ^{*4} (E24,E96)	±200		
NEW ERJ1GJ (0201)	0.05	25	50	±1	10 to 1 M ^{*4} (E24,E96)			
ERJ2RC (0402)	0.1	50	100	±1	1 to 9.76 (E24,E96)	−100 to +600	-55 to +155	Grade 0
ERJ2RK (0402)	0.1	50	100	±1	10 to 1 M (E24,E96)	±100		
ERJ3EK (0603)	0.1	75	150	±1	10 to 1 M (E24,E96)			
ERJ6EN (0805)	0.125	150	200	±1	10 to 2.2 M (E24,E96)			
NRFND ERJ8EN (1206)	0.25	200	400	±1	10 to 2.2 M (E24,E96)	±100	-55 to +155	Grade 0
NRFND ERJ14N (1210)	0.5	200	400	±1	10 to 1 M (E24,E96)			
NRFND ERJ12N (1812)	0.75	200	500	±1	10 to 1 M (E24,E96)			
NRFND ERJ12S (2010)	0.75	200	500	±1	10 to 1 M (E24,E96)			
NRFND ERJ1TN (2512)	1	200	500	±1	10 to 1 M (E24,E96)			

*1 : Use it on the condition that the case temperature is below the upper category temperature.

*2 : Rated continuous working voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Power rating} \times \text{Resistance value}}$, or limiting element voltage listed above, whichever less.

*3 : Overload test voltage (OTV) shall be determined from $OTV = \text{specified magnification (refer to performance)} \times RCWV$ or maximum overload voltage listed above, whichever less.


*4 : Please contact us when you need a type with a resistance of less than 10 Ω.

NRFND


Not recommended for new design

Power derating curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

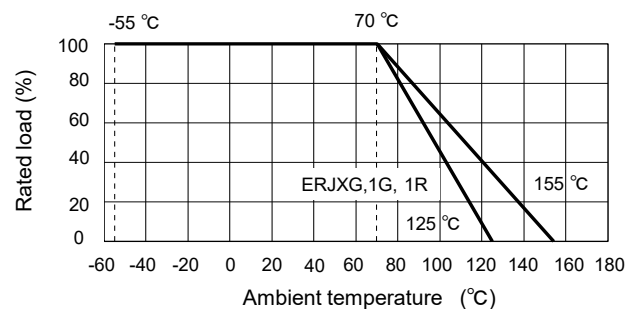


Construction

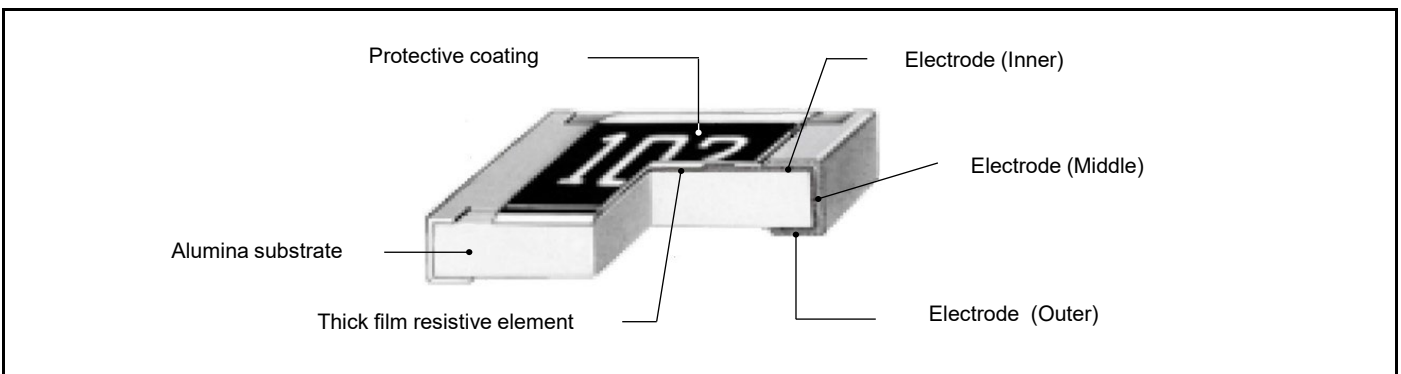

Precision Thick Film Chip Resistors

Dimensions (not to scale)

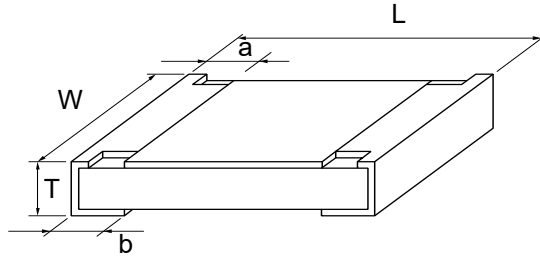

Part No.	Dimensions (mm)					Mass (Weight) (Reference) (g/1000 pcs)
	L	W	a	b	T	
ERJXG	0.40±0.02	0.20±0.02	0.10±0.03	0.10±0.03	0.13±0.02	0.04
ERJ1G	0.60±0.03	0.30±0.03	0.10±0.05	0.15±0.05	0.23±0.03	0.15
ERJ1R						
ERJ2R	1.00±0.05	0.50±0.05	0.20±0.10	0.25±0.05	0.35±0.05	0.8
ERJ3R	1.60±0.15	0.80±0.15/-0.05	0.30±0.20	0.30±0.15	0.45±0.10	2
ERJ3E						
ERJ6R	2.00±0.20	1.25±0.10	0.40±0.20	0.40±0.20	0.60±0.10	4
ERJ6E						
NRFND ERJ8EN	3.20±0.05/-0.20	1.60±0.05/-0.15	0.50±0.20	0.50±0.20	0.60±0.10	10
NRFND ERJ14N	3.20±0.20	2.50±0.20	0.50±0.20	0.50±0.20	0.60±0.10	16
NRFND ERJ12N	4.50±0.20	3.20±0.20	0.50±0.20	0.50±0.20	0.60±0.10	27
NRFND ERJ12S	5.00±0.20	2.50±0.20	0.60±0.20	0.60±0.20	0.60±0.10	27
NRFND ERJ1TN	6.40±0.20	3.20±0.20	0.65±0.20	0.60±0.20	0.60±0.10	45

NRFND Not recommended for new design

Performance

● ERJ1R, 2R, 3R, 6R series : ±0.5 % (D)

Test item	Performance requirements ΔR	Test conditions
Resistance	Within specified tolerance	20 °C
T. C. R.	Within specified T. C. R.	+25 °C / +125 °C
Overload	±2 %	Rated voltage × 2.5, 5 s
Resistance to soldering heat	±1 %	270 °C, 10 s
Rapid change of temperature	±1 %	-55 °C (30 min.) / +155 °C (ERJ1R : +125 °C)(30 min.), 100 cycles
High temperature exposure	±1 %	+155 °C (ERJ1R : +125 °C), 1000 h
Damp heat, Steady state	±1 %	60 °C, 90 % to 95 %RH, 1000 h
Load life in humidity	±2 % ERJ1R : ±3 %	60 °C, 90 % to 95 %RH, Rated voltage, 1.5 h ON / 0.5 h OFF cycle, 1000 h
Endurance at 70 °C	±2 % ERJ1R : ±3 %	70 °C, Rated voltage, 1.5 h ON / 0.5 h OFF cycle, 1000 h

● ERJXGN, 1GN, 1GJ, 2RC, 2RK, 3EK, 6EN, 8EN, 14N, 12N, 12S, 1TN series : ±1 % (F)

Test item	Performance requirements ΔR	Test conditions
Resistance	Within specified tolerance	20 °C
T. C. R.	Within specified T. C. R.	+25 °C / +155 °C (ERJXG, ERJ1G : +25 °C / +125 °C)
Overload	±2 %	Rated voltage × 2.5, 5 s
Resistance to soldering heat	±1 %	270 °C, 10 s
Rapid change of temperature	±1 %	-55 °C (30 min.) / +155 °C (ERJXG, ERJ1G : +125 °C)(30 min.), 100 cycles
High temperature exposure	±1 %	+155 °C (ERJXG, ERJ1G : +125 °C), 1000 h
Damp heat, Steady state	±1 %	60 °C, 90 % to 95 %RH, 1000 h
Load life in humidity	±2 % ERJXG, 1G : ±3 %	60 °C, 90 % to 95 %RH, Rated voltage, 1.5 h ON / 0.5 h OFF cycle, 1000 h
Endurance at 70 °C	±2 % ERJXG, 1G : ±3 %	70 °C, Rated voltage, 1.5 h ON / 0.5 h OFF cycle, 1000 h

Guidelines and precautions regarding the technical information and use of our products described in this online catalog.

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- Please ensure the safety by means of protection circuit, redundant circuit etc. in your system design in order to prevent the occurrence of life crisis and other serious damages due to the failure of our products.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this catalog is to be exported, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.

<Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>

- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

Please note that we do not owe any liability and responsibility if our products are used beyond the description of this catalog or without complying with precautions in this catalog.



Application Guidelines (Fixed Resistors)

1. Safety precautions

- Make sure to exchange product specifications before using this product, regardless of the intended use.
The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products under the actual conditions for use.
- If a malfunction of this product may result in the loss of human life or other serious damage in transportation equipment (trains, automobiles, ships, etc.), signaling equipment, medical equipment, aerospace equipment, electric heating equipment, combustion and gas equipment, rotating equipment, disaster prevention and security equipment, and other equipment, ensure safety by implementing a fail-safe design with the following system.
 - * Systems equipped with a protection circuit and a protection device.
 - * Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault.
 - * Systems equipped with an arresting the spread of fire or preventing glitch.

2. Precautions for use

- These products are designed and manufactured for general and standard use in general electronic equipment (e.g. AV equipment, home electric appliances, office equipment, information and communication equipment).
If the product is to be used in an application that requires special quality and reliability and where failure or malfunction of the product may directly threaten human life or cause bodily harm (e.g., aerospace equipment, transportation equipment, combustion equipment, medical equipment, disaster prevention and security equipment, safety devices, etc.), be sure to consult with our sales office in advance and exchange product specifications appropriate for the application.
- These products are not intended for use in the following special conditions. Before using the products, carefully check the effects on their quality and performance, and determine whether or not they can be used.
 1. In liquid, such as water, oil, chemicals, or organic solvent.
 2. In direct sunlight, outdoors, or in dust.
 3. In salty air or air with a high concentration of corrosive gas, such as Cl_2 , H_2S , NH_3 , SO_2 , or NO_x .
 4. Electric Static Discharge (ESD) Environment.
These components are sensitive to static electricity and can be damaged under static shock (ESD).
Please take measures to avoid any of these environments.
Smaller components are more sensitive to ESD environment.
 5. Electromagnetic and Radioactive Environment.
Avoid any environment where strong electromagnetic waves and radiation exist.
 6. In an environment where these products cause dew condensation.
 7. Sealing or coating of these products or a printed circuit board on which these products are mounted, with resin or other materials.
- These products generate Joule heat when energized. Carefully position these products so that their heat will not affect the other components.
- Carefully position these products so that their temperatures will not exceed the category temperature range due to the effects of neighboring heat-generating components. Do not mount or place heat-generating components or inflammables, such as vinyl-coated wires, near these products.
- Note that non-cleaning solder, halogen-based highly active flux, or water-soluble flux may deteriorate the performance or reliability of the products.
- Carefully select a flux cleaning agent for use after soldering. An unsuitable agent may deteriorate the performance or reliability. In particular, when using water or a water-soluble cleaning agent, be careful not to leave water residues. Otherwise, the insulation performance may be deteriorated.
- Do not apply flux to these products after soldering. The activity of flux may be a cause of failures in these products.
- Refer to the recommended soldering conditions and set the soldering condition. High peak temperature or long heating time may impair the performance or the reliability of these products.
- Recommended soldering condition is for the guideline for ensuring the basic characteristics of the products, not for the stable soldering conditions. Conditions for proper soldering should be set up according to individual conditions.
- Do not reuse any products after removal from mounting boards.
- Do not drop these products. If these products are dropped, do not use them. Such products may have received mechanical or electrical damage.
- If any doubt or concern to the safety on these products arise, make sure to inform us immediately and conduct technical examinations at your side.

3. Precautions for storage

The performance of these products, including the solderability, is guaranteed for a year from the date of arrival at your company, provided that they remain packed as they were when delivered and stored at a temperature of 5 °C to 35 °C and a relative humidity of 45 % to 85 %.

Even within the above guarantee periods, do not store these products in the following conditions. Otherwise, their electrical performance and/or solderability may be deteriorated, and the packaging materials (e.g. taping materials) may be deformed or deteriorated, resulting in mounting failures.

1. In salty air or in air with a high concentration of corrosive gas, such as Cl₂, H₂S, NH₃, SO₂, or NO_x.
2. In direct sunlight.

<Package markings>

Package markings include the product number, quantity, and country of origin.

In principle, the country of origin should be indicated in English.

4. AEC-Q200 compliant

The products are tested based on all or part of the test conditions and methods defined in AEC-Q200. Please consult with Panasonic for the details of the product specification and specific evaluation test results, etc., make sure to exchange product specifications for each product when placing an order.



Application Guidelines (Surface Mount Resistors)

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.

1. Take measures against mechanical stress during and after mounting of Surface Mount Resistors (hereafter called the resistors) so as not to damage their electrodes and protective coatings.
Be careful not to misplace the resistors on the land patterns. Otherwise, solder bridging may occur.
2. Keep the rated power and ambient temperature within the specified derating curve.
Some circuit boards, wiring patterns, temperatures of heat generated by adjacent components, or ambient temperatures can become factors in the rise of the temperature of the resistors, regardless of the level of power applied. Therefore, check the conditions before use and optimize them so as not to damage the boards and peripheral components.
Make sure to contact us before using the resistors under special conditions.
3. If a transient load (heavy load in a short time) like a pulse is expected to be applied, check and evaluate the operations of the resistors when installed in your products before use. Never exceed the rated power. Otherwise, the performance and/or reliability of the resistors may be impaired.
4. Transient voltage
If there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a high voltage pulse may be applied, make sure to evaluate and check the characteristics of resistors mounted on your product rather than only depending on the calculated power limit or steady-state conditions.
5. The electrical characteristics may change when used in high-frequency circuits, so check thoroughly before use.
Such circuits change the electrical characteristics of the resistors.
6. Before using halogen-based or other high-activity flux, check the possible effects of the flux residues on the performance and reliability of the resistors.
7. When soldering with a soldering iron, never touch the resistors' bodies with the tip of the soldering iron.
When using a soldering iron with a high temperature tip, finish soldering as quickly as possible (within three seconds at 350 °C max.).
8. The connection reliability and performance may be affected if the amount of solder is too much or too little.
Check the performance and reliability of the product and use an appropriate amount of solder.
9. When the resistors' protective coatings are chipped, flawed, or removed, the characteristics of the resistors may be impaired. Take special care not to apply mechanical shock during automatic mounting or cause damage during handling of the boards with the resistors mounted.
10. Do not apply shock to the resistors or pinch them with a hard tool (e.g. pliers and tweezers). Otherwise, the resistors' protective coatings and bodies may be chipped, affecting their performance.
11. Avoid excessive bending of printed circuit boards in order to protect the resistors from abnormal stress.
12. Do not immerse the resistors in solvent for a long time.
Before using solvent, carefully check the effects of immersion.
13. Do not apply excessive tension to the terminals.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD](#) ***category:***

Click to view products by [Panasonic](#) ***manufacturer:***

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [CR-12JP4--680R](#) [CRCW04021K20FKEE](#) [CRCW04028R20JNEE](#) [CRCW06032K10FKEC](#)
[CRCW06036K80FKEE](#) [M55342K03B499DRS6](#) [M55342K06B6E19RWL](#) [M55342K09B5D62RS6](#) [M55342M06B26E7RS3](#) [742C083750JTR](#)
[MCR01MRTF1001](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ121](#)
[MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZHJ103](#) [MCR03EZPFX2004](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#) [MCR10EZPF1102](#)
[MCR18EZPJ330](#) [RC1005F1152CS](#) [RC1005F1372CS](#) [RC1005F2052CS](#) [RC1005F471CS](#) [RC1005F4751CS](#) [RC1005F5621CS](#)
[RC1005F6041CS](#) [RC1005J121CS](#) [RC1005J122CS](#) [RC1005J180CS](#) [RC1005J181CS](#) [RC1005J202CS](#) [RC1005J391CS](#) [RC1005J512CS](#)
[RC1005J683CS](#) [RC1005J823CS](#) [RC1608F333CS](#) [RC1608F5110CS](#) [RC1608J121CS](#) [RC2012F2493CS](#) [RC2012F2740CS](#) [RC2012J105CS](#)
[RC2012J470CS](#)