



Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body

Phase Shifters and Trimmers Technical Data Sheet

PE8284

Features

- Phase Adjustment: 15 Deg/GHz
- Frequency Range from DC to 18 GHz
- SMA Connectorized Design
- Insertion Loss: 0.5 dB Max
- Max VSWR 1.4:1
- Max Power Rating: 80 Watts (CW)

Applications

- Test & Measurements
- Radar Development
- Military Communications Systems
- Phase Array Antenna System
- Satellite Communications

Description

Pasternack's PE8284 is a phase trimmer that has phase adjustment range of 15 degrees per GHz with a frequency range from DC to 18 GHz. With SMA male to SMA female connectors, this RF phase trimmer design is tried and true technology that offers exceptional RF performance characteristics that include a maximum VSWR of 1.4:1. Phase trimmers are part of Pasternack's comprehensive RF passive product offerings which are available in stock and ready for same-day shipment.

Electrical Specifications (Values at +25° C, Sea Level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Phase Adjustment		15		Deg/GHz
Input VSWR			1.4:1	
Insertion Loss			0.5	dB
Input Power, CW			80	dBm

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12	12 to 18			GHz
VSWR, Max	1.15:1	1.25:1	1.4:1			

Mechanical Specifications

Size

Length	2.598 in [65.99 mm]
Width/Diameter	0.5 in [12.7 mm]
Height	0.5 in [12.7 mm]
Weight	0.09 lbs [40.82 g]
Body Material and Plating	Passivated Stainless Steel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body PE8284](#)



Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body

Phase Shifters and Trimmers Technical Data Sheet

PE8284

Configuration

Input Connector	SMA Male
Input Connector Center Contact Material	Beryllium Copper
Input Connector Center Contact Plating	Gold
Output Connector	SMA Female
Output Connector Center Contact Material	Beryllium Copper
Output Connector Center Contact Plating	Gold

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body PE8284](#)

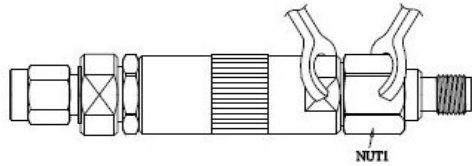
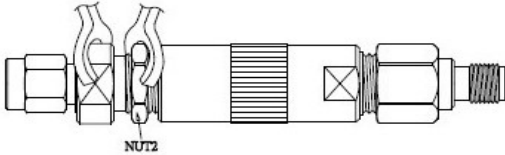
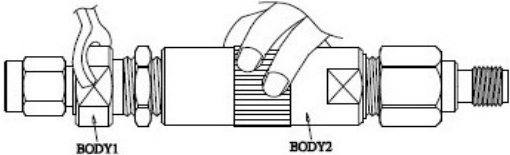
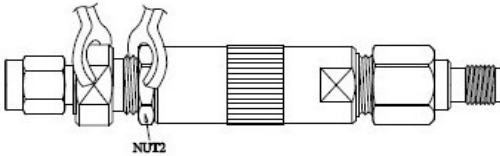
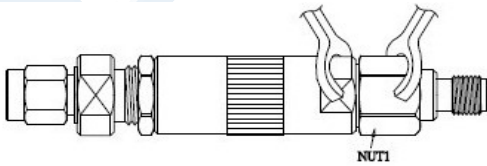


Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body

Phase Shifters and Trimmers Technical Data Sheet **PE8284**

Sequence Diagram

Phase Trimmer Instructions

Diagram	Phase Trimmer Instructions
	Step 1: Loosen NUT1 before adjusting Phase. Use Spanner size 11mm.
	Step 2: Loosen NUT2 before adjusting Phase. Use Spanner size 11mm.
	Step 3: Adjust to the required phase: Keep BODY1 in a fixed position and adjust phase by manually turning BODY2.
	Step 4: Tighten NUT2 after adjusting phase. Use Spanner size 11mm.
	Step 5: Tighten NUT1 after adjusting phase. Use Spanner size 11mm. Note: After tightening NUT1 the SMA Female should be fixed (and not rotate)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body PE8284](#)



Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body

Phase Shifters and Trimmers Technical Data Sheet

PE8284

Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Adjustable Phase Trimmer, DC to 18 GHz, with an Adjustable Phase of 15 Deg. Per GHz and SMA Connectors, Stainless Steel Body PE8284](https://www.pasternack.com/adjustable-phase-trimmer-18-mhz-15-deg-per-ghz-sma-pe8284-p.aspx)

URL: <https://www.pasternack.com/adjustable-phase-trimmer-18-mhz-15-deg-per-ghz-sma-pe8284-p.aspx>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Pasternack](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)