



Data Sheet	AT-2240-TT-4
------------	--------------


Features:

- Low profile transducer
- 4kHz resonant frequency
- Wide voltage range for variety of uses


Specifications

Parameters	Values	Units
Rated Voltage	3	Vp-p
Operating Voltage Range	2~30	Vp-p
Current Draw at Rated Voltage	6	mA
Capacitance	26,000 ± 30%	pF
Minimum SPL @ 10cm	85	dBA
Resonant Frequency	4,000 ± 500	Hz
Housing Material	PBT (Black)	-
Terminal Material	Sn Plating	-
Weight	2.07	Grams
Environmental Compliances	RoHS/REACH	Ex. 7c-1
Storage Temperature	-40 ~ 80	°C
Operating Temperature	-35 ~ 80	°C


Measurement Method (10Vpp; 4.1kHz)

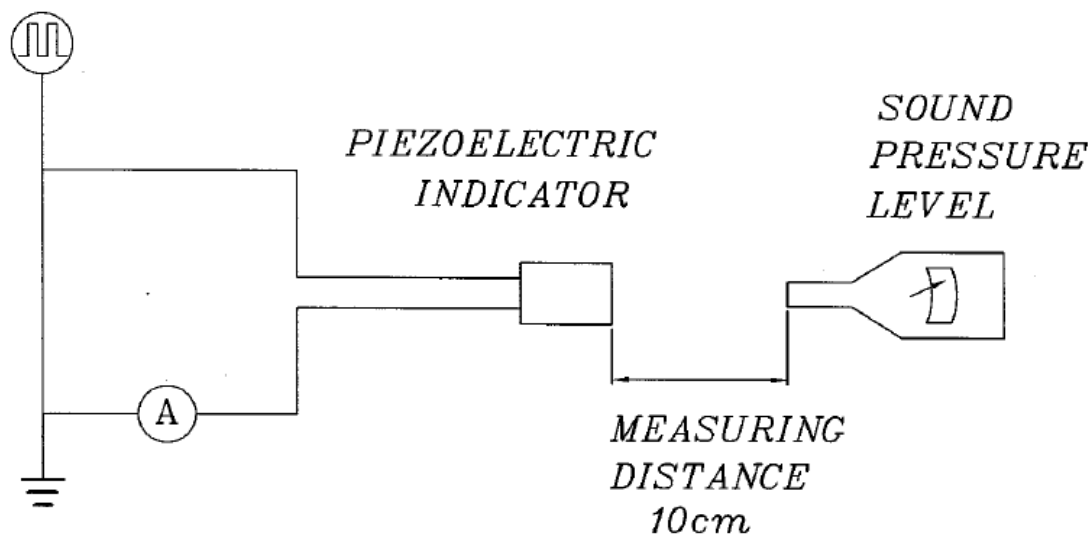

Typical Frequency Response (3Vpp; 4.1kHz)

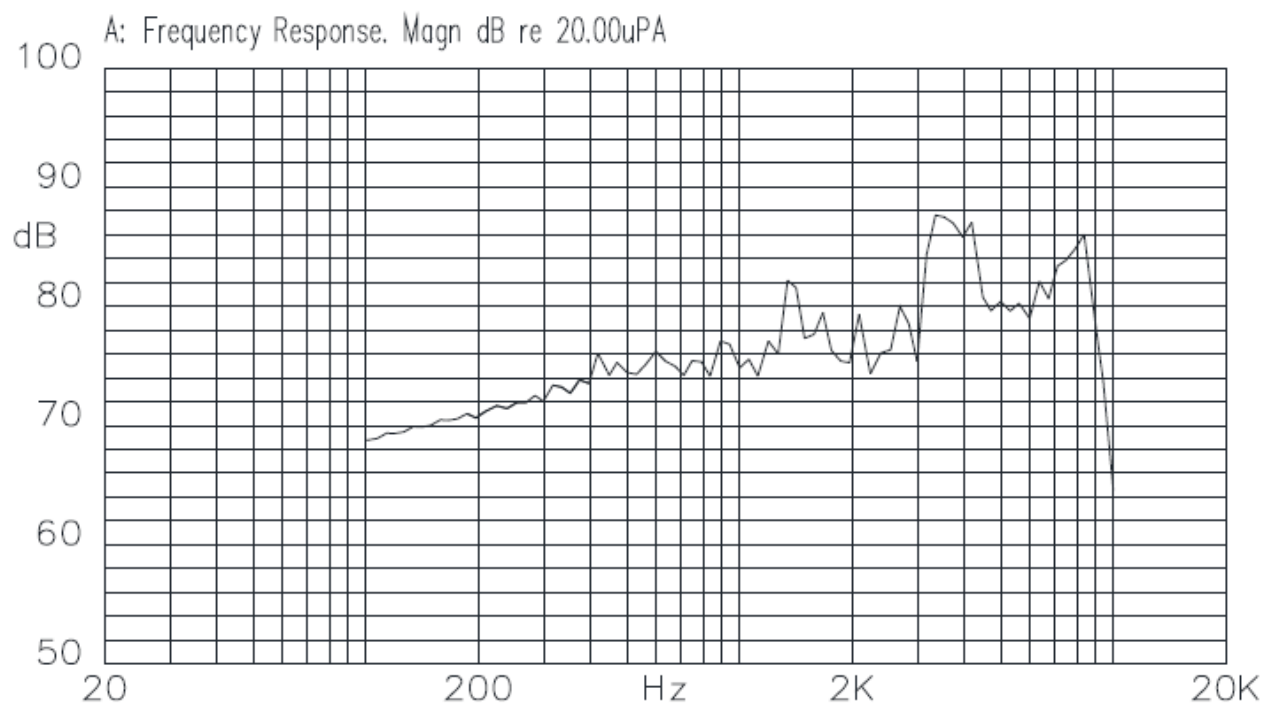


Reliability Testing

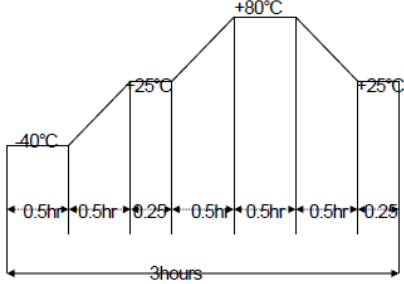Type of Test	Test Specifications
High Temperature Test	96 hours at 80°C
Low Temperature Test	96 hours at -40°C
Humidity Test	96 hours at 40°C with relative humidity at 90%
Temperature Cycle Testing	Run for 5 cycles with each cycle consisting of: 
Vibration Test	Frequency: 10Hz to 55Hz; Amplitude: 1.55mm 2 hours in each of the X,Y, and Z axes
Drop Test	Drop from a height of 75cm onto a 40mm thick board 3 times in each of the X, Y, and Z axes

After each test, let the part rest for 4 hours, then the change in SPL shall be within ±10dB

Dimensions

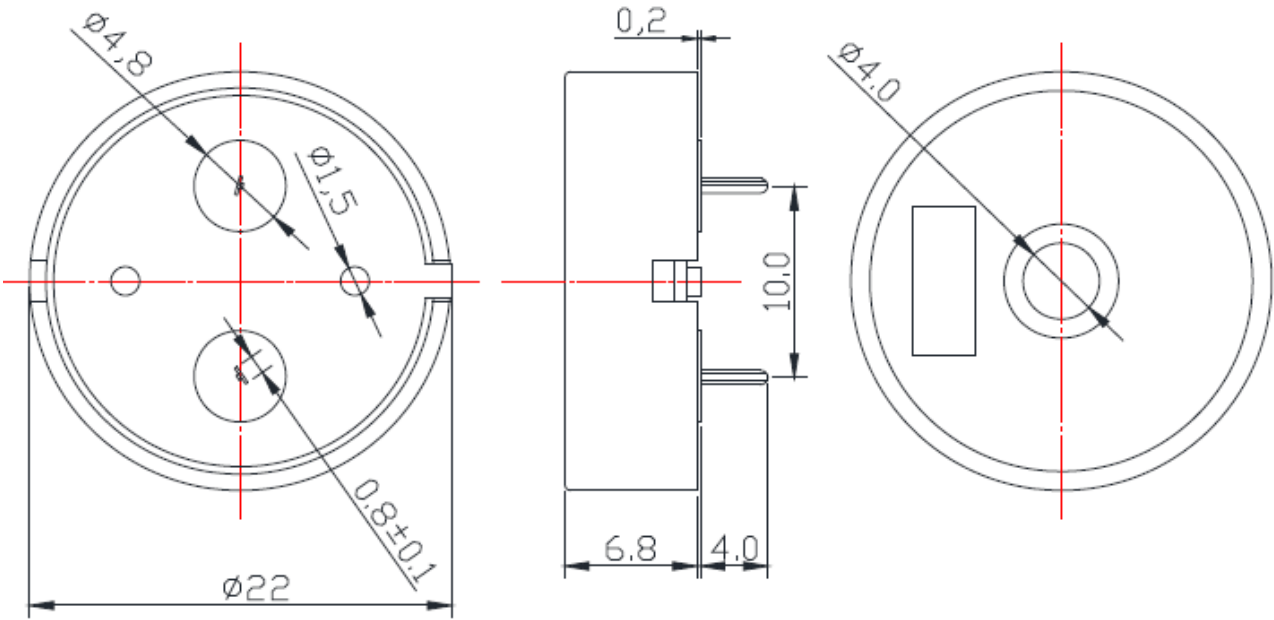

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) ***category:***

Click to view products by [PUI Audio](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)