

# OLED DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.  
曜凌光電股份有限公司



曜凌光電股份有限公司  
Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760  
sales@raystar-optronics.com | www.raystar-optronics.com

---

## SPECIFICATION

Model No:

REX012864AH

### General Specification

The Features is described as follow :


- Module dimension : 42.04 × 27.22 × 1.41 mm
- Active area : 35.05 × 17.51 mm
- Dot Matrix : 128 × 64
- Pixel Size : 0.249 × 0.249 mm
- Pixel Pitch : 0.274 × 0.274 mm
- Duty : 1/64 Duty
- Display Mode : Passive Matrix
- Display Color : Monochrome
- Interface : 6800,8080,4-Wire SPI,I2C
- IC : SH1106
- SIZE : 1.54 inch

## Interface Pin Function

No.	Symbol	Function															
1	ESD_GND	ESD Ground pin															
2	VSS	Ground.															
3	VSS	Ground.															
4	NC	No connection															
5	VDD1	Power supply input															
6	IM1	These are the MPU interface mode select pads. <table border="1"> <thead> <tr> <th></th> <th>8080</th> <th>I2C</th> <th>6800</th> <th>4-wire SPI</th> </tr> </thead> <tbody> <tr> <td>IM1</td> <td>1</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>IM2</td> <td>1</td> <td>0</td> <td>1</td> <td>0</td> </tr> </tbody> </table>		8080	I2C	6800	4-wire SPI	IM1	1	1	0	0	IM2	1	0	1	0
	8080	I2C	6800	4-wire SPI													
IM1	1	1	0	0													
IM2	1	0	1	0													
7	IM2	Note (1) 0 is connected to VSS (2) 1 is connected to VDD1															
8	$\overline{CS}$	This pad is the chip select input. When $\overline{CS}$ = "L", then the chip select becomes active, and data/command I/O is enabled.															
9	$\overline{RES}$	This is a reset signal input pad. When $\overline{RES}$ is set to "L", the settings are initialized. The reset operation is performed by the $\overline{RES}$ signal level.															
10	A0	This is the Data/Command control pad that determines whether the data bits are data or a command. A0 = "H": the inputs at D0 to D7 are treated as display data. A0 = "L": the inputs at D0 to D7 are transferred to the command registers. In I2C interface, this pad serves as SA0 to distinguish the different address of OLED driver.															
11	$\overline{WR}$ (R/ $\overline{W}$ )	This is a MPU interface input pad. When connected to an 8080 MPU, this is active LOW. This pad connects to the 8080 MPU $\overline{WR}$ signal. The signals on the data bus are latched at the rising edge of the $\overline{WR}$ signal. When connected to a 6800 Series MPU: This is the read/write control signal input terminal. When R/ $\overline{W}$ = "H": Read. When R/ $\overline{W}$ = "L": Write.															

12	E/ $\overline{\text{RD}}$	<p>This is a MPU interface input pad.</p> <p>When connected to an 8080 series MPU, it is active LOW. This pad is connected to the <math>\overline{\text{RD}}</math> signal of the 8080 series MPU, and the data bus is in an output status when this signal is "L".</p> <p>When connected to a 6800 series MPU, this is active HIGH. This is used as an enable clock input of the 6800 series MPU.</p> <p>When <math>\overline{\text{RD}}</math> = "H": Enable.</p> <p>When <math>\overline{\text{RD}}</math> = "L": Disable.</p>
13-20	D0~D7	<p>This is an 8-bit bi-directional data bus that connects to an 8-bit or 16-bit standard MPU data bus.</p> <p>When the serial interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SI). At this time, D2 to D7 are set to high impedance.</p> <p>When the I2C interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SDAI). At this time, D2 to D7 are set to high impedance.</p>
21	IREF	<p>This is a segment current reference pad. A resistor should be connected between this pad and VSS. Set the current at 18.75uA.</p>
22	VCOMH	<p>This is a pad for the voltage output high level for common signals. A capacitor should be connected between this pad and VSS.</p>
23	VPP	<p>OLED panel power supply. Generated by internal charge pump. Connect to capacitor. It could be supplied externally.</p>
24	ESD_GND	<p>ESD Ground pin</p>

# Contour Drawing & Block Diagram

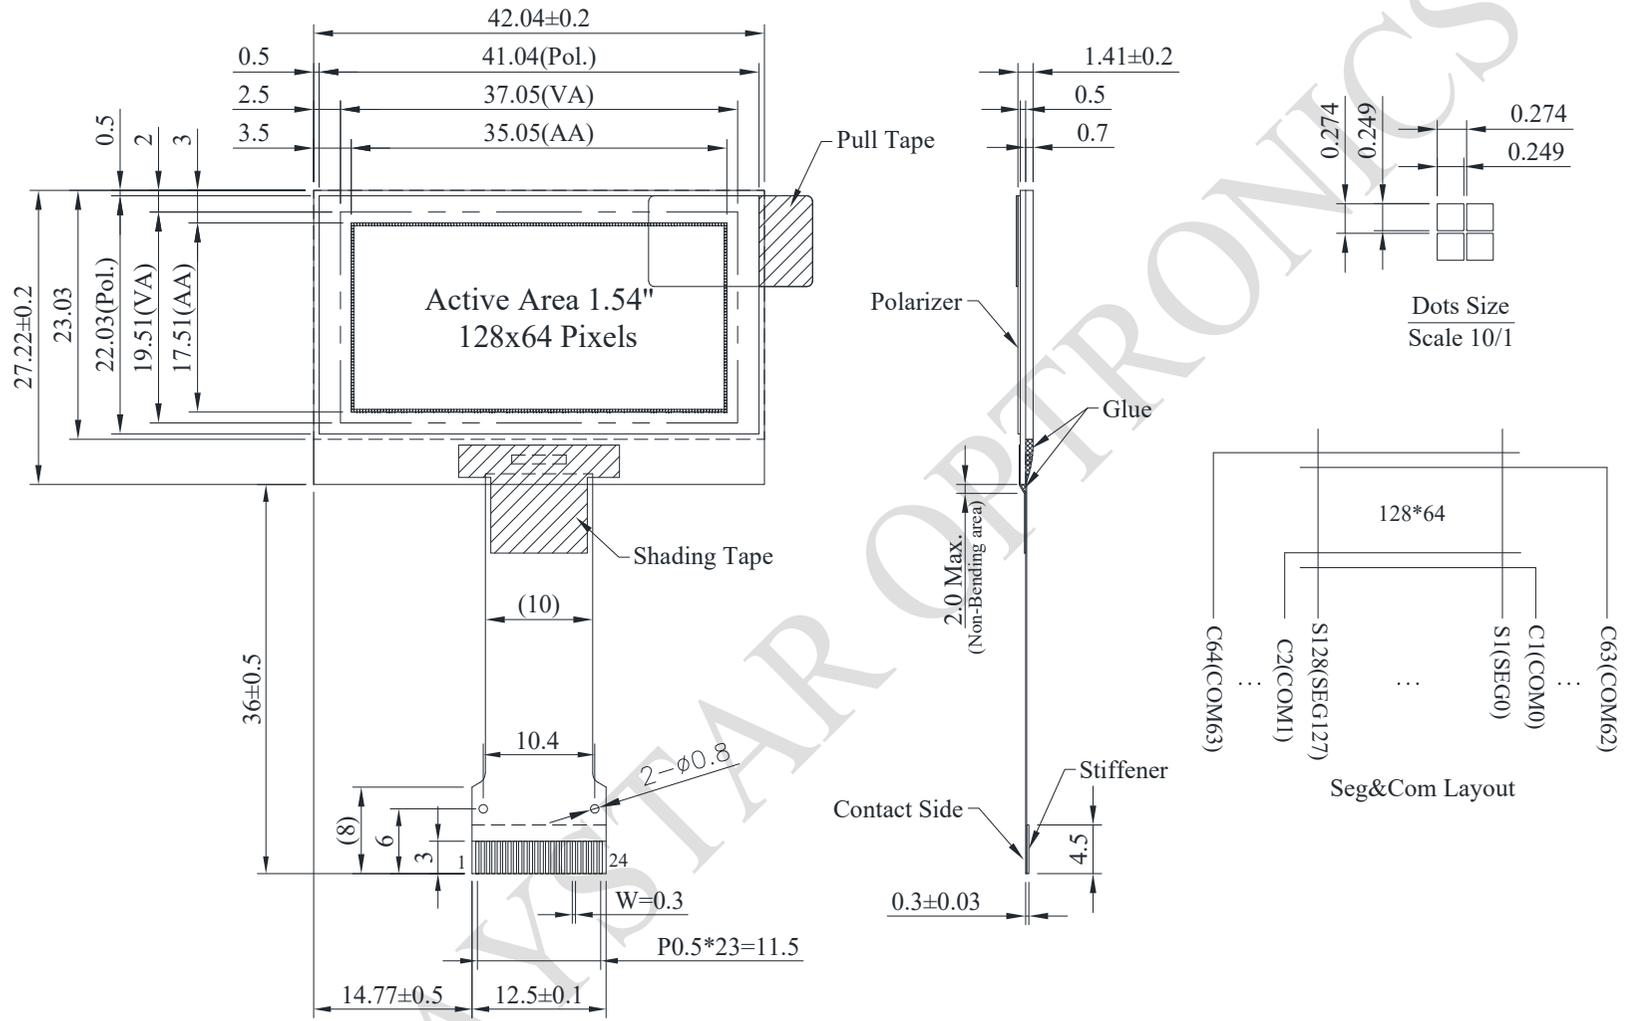

PIN	SYMBOL
1	ESD_GND
2	VSS
3	VSS
4	NC
5	VDD1
6	IM1
7	IM2
8	CS
9	RES
10	A0
11	WR
12	E/RD
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VPP
24	ESD_GND

The non-specified tolerance of dimension is ±0.3 mm .

## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VDD1	-0.3	3.6	V
Supply Voltage for Display	VPP	-0.3	14.5	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

## Electrical Characteristics

### DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VDD1	—	1.65	3.0	3.3	V
Supply Voltage for	VPP	—	6.4	12.5	13.0	V
High Level Input	VIH	—	0.8×VDD1	—	VDD1	V
Low Level Input	VIL	—	VSS	—	0.2×VDD1	V
High Level Output	VOH	—	0.8×VDD1	—	VDD1	V
Low Level Output	VOL	—	VSS	—	0.2×VDD1	V
Display 50% Pixel on	IPP	VPP =12.5V	—	13	20	mA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [OLED Displays & Accessories](#) category:*

*Click to view products by [Raystar](#) manufacturer:*

Other Similar products are found below :

[REX012832DSPP3N00002](#) [REG010016AWPP5N00100](#) [DEP 16207-W](#) [NHD-2.7-12864WDW3M-CTP](#) [NHD-2.7-12864WDY3-CTP](#) [NHD-2.7-12864WDY3M-CTP](#) [104020248](#) [10507](#) [10514](#) [REG010008AGPP5N00000](#) [REG010008AWPP5N00000](#) [REG010032BYPP5N00000](#)  
[REX012832EWAP3N00000](#) [13992](#) [DEP 128064B1-Y](#) [DEP 128064J-Y](#) [DEP 16202-Y](#) [14657](#) [14747](#) [17009](#) [19299](#) [19376](#) [19750](#) [DEP 100016A-Y](#) [EA W128128-XRLB](#) [EA W128128-XRLW](#) [NHD-0220DZW-AB5](#) [NHD-3.12-25664UCW2](#) [NHD-2.7-12864WDY3](#) [NHD-2.7-12864WDW3](#) [NHD-2.23-12832UCW3](#) [NHD-0216SZW-BB5](#) [REG010008AYPP5N00000](#) [REG010016CYPP5N00000](#)  
[REG010016DGPP5N00000](#) [REG010016DWPP5N00000](#) [REG010032AGPP5N00000](#) [REG010032ARPP5N00000](#) [REG010032BGPP5N00000](#)  
[REX012832EYAP3N00000](#) [DEP 050016A-Y](#) [DEP 08201-W](#) [DEP 128032A-Y](#) [DEP 20201-W](#) [DEP 20401-W](#) [DEP 128064D-W](#) [DEP 128064I-Y](#) [DEP 128064M1-W](#) [REX009664AYPP3N00000](#) [REX012864CYAP3N00000](#)