

Description

Transient Diverting Suppressors (TDS) are designed to provide high energy EOS protection with superior clamping and temperature characteristics when compared to standard TVS devices. The device uses a surge rated FET as the main protection element. During an EOS event, transient voltage increases beyond the rated breakdown voltage of the device. The FET in turn switches on and conducts transient current to ground. The TDS clamping voltage is nearly constant across the rated peak pulse current range due to the extremely low ON Resistance of the FET. Lower clamping voltage at maximum peak pulse current makes them more suitable for protecting today's sensitive IC's, when compared to standard TVS diodes.

TDS2621LP is designed to protect voltage bus or data lines with the max operating voltage of 26.4V. It is rated for a high-energy transient current up to 24A ($t_p = 8/20\mu s$) and may be used to meet the common industrial voltage surge standard of $\pm 1kV$ per IEC 61000-4-5 ($R_S = 42\Omega$, $C_S = 0.5\mu F$).

TDS2621LP is in a small DFN 1.6 x 1.6 x 0.55mm 2-Lead package and represent significant board space savings over traditional SMAJ and SMBJ packaged devices.

Applications

- USB Type-C
- VBUS Lines
- IoT Devices

Dimensions

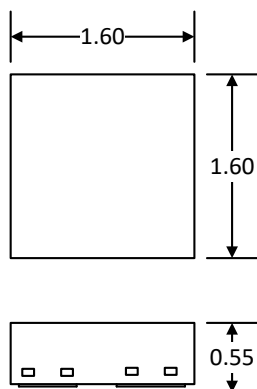


Figure (1) Nominal Dimensions Drawing

Features

- High ESD withstand Voltage: $\pm 20kV$ (Contact) & $\pm 25kV$ (Air) per IEC 61000-4-2
- High peak pulse current capability: 24A ($t_p = 8/20\mu s$), 1kV ($t_p = 1.2/50\mu s$, $R_S = 42\Omega$) per IEC 61000-4-5
- Protects one I/O or power line
- Max working voltage 26.4V
- Solid-state technology

Mechanical Characteristics

- Package: DFN 1.6 x 1.6 x 0.55mm 2-Lead
- Pb-free, Halogen Free, RoHS/WEEE Compliant
- Molding compound flammability rating: UL 94V-0
- Lead Finish: Lead-free
- Marking: Marking code and Date Code
- Packaging: Tape and Reel

Functional Diagram

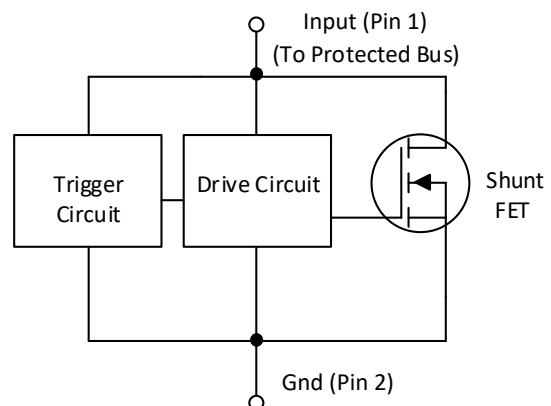


Figure (2) Functional diagram

Absolute Maximum ESD Rating

RATING	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PK}	840	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	24	A
Peak Pulse Current ($t_p = 10/1000\mu s$)	I_{PP}	1.3	A
ESD per IEC 61000-4-2 (Air) ⁽¹⁾	V_{ESD}	±25	kV
ESD per IEC 61000-4-2 (Contact) ⁽¹⁾		±20	kV
Operating Temperature	T_{OP}	-40 to +125	°C
Junction and Storage Temperature	T_J and T_{STG}	-55 to +150	°C

Exceeding the above specifications may result in permanent damage to the device or device malfunction. Operation outside of the parameters specified in the Electrical Characteristics section is not recommended.

Electrical Characteristics

$T_A = 25^\circ\text{C}$ unless otherwise specified. All data taken from Pin 1 to 2 unless otherwise specified.

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage	V_{RWM}				26.4	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$	31	32	33.2	V
Forward Voltage	V_F	$I_t = 1\text{mA}$, Pin 2 to Pin 1		0.6		V
Reverse Leakage Current	I_R	$V_{RWM} = 26.4\text{V}$		5	60	nA
Clamping Voltage ⁽²⁾	V_C	$I_{PP} = 24\text{A}$, $t_p = 8/20\mu s$		32.7	35	V
Dynamic Resistance ^{(2),(3)}	R_{DYN}	$t_p = 8/20\mu s$		32		mΩ
Junction Capacitance	C_J	$V_R = 26.4\text{V}$, $f = 1\text{MHz}$		86		pF

Notes:

- 1) ESD gun return path connected to ESD ground plane.
- 2) Parameter guaranteed by design.
- 3) Dynamic resistance measured between 1A and IPP ($t_p = 8/20\mu s$)

Application Information

DESCRIPTION

Transient Diverting Suppressors (TDS) are designed to provide high energy EOS protection with superior clamping and temperature characteristics when compared to standard TVS devices.

This device uses a surge rated FET as the main protection element. During an EOS event, transient voltage increases beyond the breakdown voltage of the trigger circuit. This in turn activates the drive circuit and turns on the shunt FET which conducts transient current to ground. The TDS has an extremely low dynamic resistance and exhibits a nearly constant clamping voltage across the rated peak pulse current range.


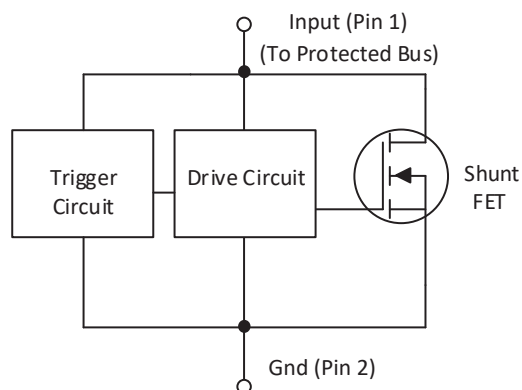


Figure (3) Function Diagram

PIN CONFIGURATION

TDS2621LP is in a 1.6 x 1.6mm, 2-pin DFN package. The input or connection to the protected bus is made at pin 1. Ground connection is made at pin 2. Ground connection with multiple vias is recommended.



(Top View)

Figure (4) Pin Configuration

LAYOUT GUIDELINES

Figure 5 shows a recommended layout. Ground connection with multiple vias is recommended.



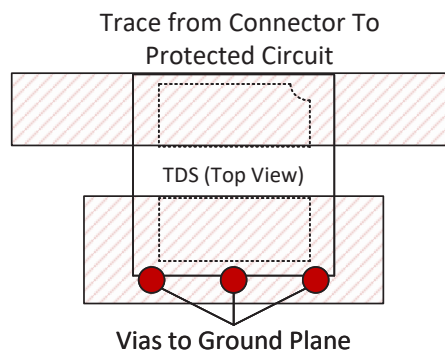


Figure (5) Layout Diagram


Outline Drawing - DFN 1.6 x 1.6 x 0.55 mm, 2 Lead

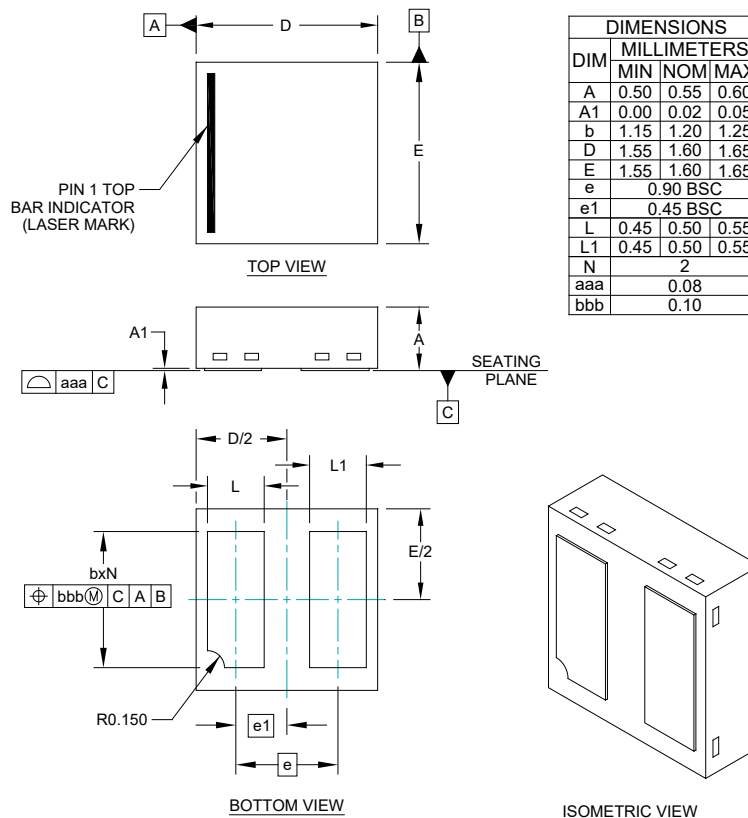

Landing Pattern - DFN 1.6 x 1.6 x 0.55 mm, 2 Lead

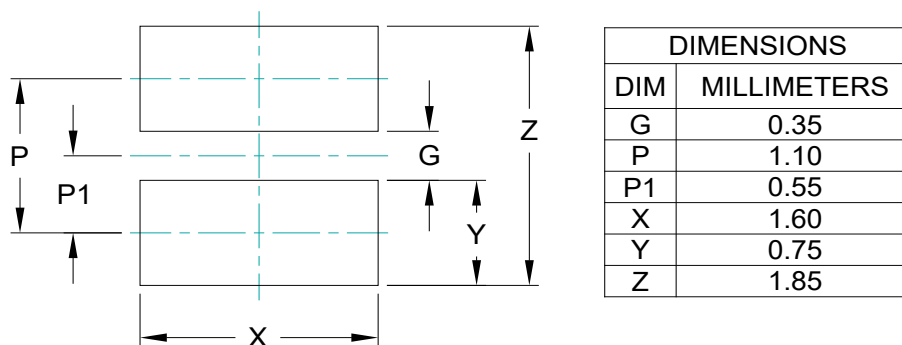


- NOTES:**
1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
 2. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY. CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR COMPANY'S MANUFACTURING GUIDELINES ARE MET.



Note:

1. Bar indicates Pin 1 location.
2. XXXX Date Code

Tape and Reel Specification

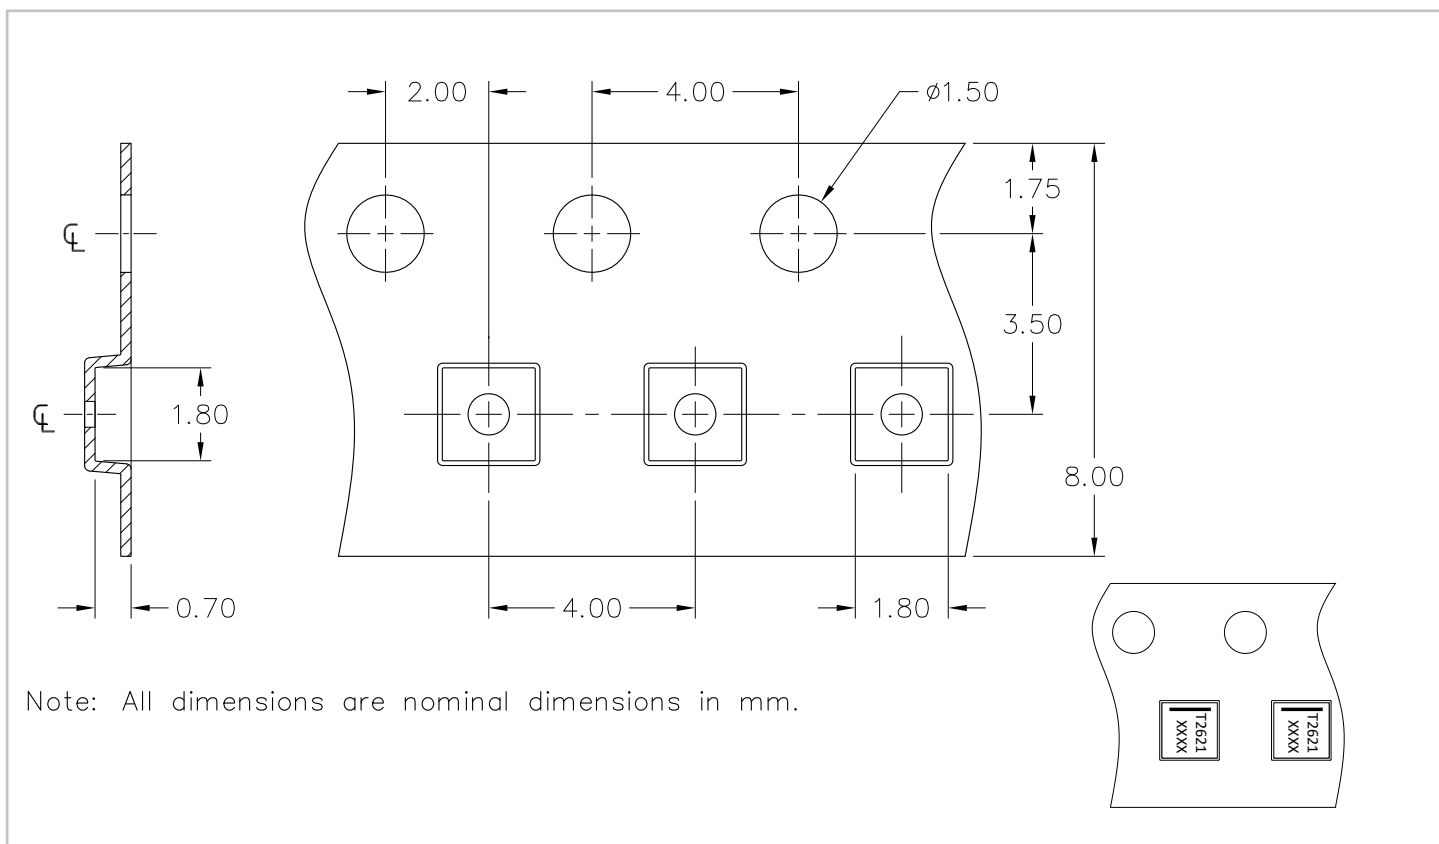

Order Information

PART NUMBER	QTY PER REEL	DESCRIPTION
TDS2621LP.C	3,000	7" Reel



Important Notice

Information relating to this product and the application or design described herein is believed to be reliable, however such information is provided as a guide only and Semtech assumes no liability for any errors in this document, or for the application or design described herein. Semtech reserves the right to make changes to the product or this document at any time without notice. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. Semtech warrants performance of its products to the specifications applicable at the time of sale, and all sales are made in accordance with Semtech's standard terms and conditions of sale.

Product features listed in this datasheet may be suitable for "non-safety" applications in Automotive use cases. Information in this datasheet for such applications is provided as a guide only. No safety claim is made in respect of the product described in this datasheet when used in Automotive safety systems or security devices, including systems for controlling vehicles and other transportation equipment; responsibility for achieving safety goals belongs solely to the buyer and/or integrators. Semtech is under no obligation to provide any data regarding safety integration to the buyer or any integrator.

SEMTECH PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE (1) AUTOMOTIVE SAFETY OR SECURITY DEVICES, INCLUDING SYSTEMS FOR CONTROLLING VEHICLES AND OTHER TRANSPORTATION EQUIPMENT, (2) IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS, OR (3) IN NUCLEAR APPLICATIONS IN WHICH THE FAILURE COULD BE REASONABLY EXPECTED TO RESULT IN PERSONAL INJURY, LOSS OF LIFE OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. INCLUSION OF SEMTECH PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE UNDERTAKEN SOLELY AT THE CUSTOMER'S OWN RISK. Should a customer purchase or use Semtech products for any such unauthorized application, the customer shall indemnify and hold Semtech and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs damages and attorney fees which could arise.

The Semtech name and logo are registered trademarks of the Semtech Corporation. All other trademarks and trade names mentioned may be marks and names of Semtech or their respective companies. Semtech reserves the right to make changes to, or discontinue any products described in this document without further notice. Semtech makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. All rights reserved.

© Semtech 2024

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Semtech](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)