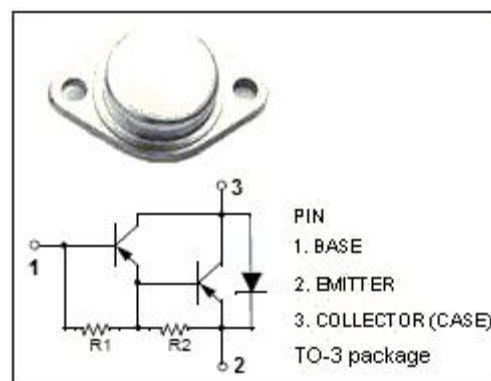


DESCRIPTION

- Collector-Emitter Breakdown Voltage
: $V_{(BR)CEO} = -120V(\text{Min.})$
- High DC Current Gain-
: $h_{FE} = 1000(\text{Min.})@I_C = -25A$
: $h_{FE} = 400(\text{Min.})@I_C = -50A$
- Complement to the NPN MJ11032

APPLICATIONS


- Designed for use as output devices in complementary general purpose amplifier applications.

**ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)**

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-120	V
V_{CEO}	Collector-Emitter Voltage	-120	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-50	A
I_{CM}	Collector Current-Peak	-100	A
I_B	Base Current-Continuous	-2	A
P_C	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	300	W
T_j	Junction Temperature	200	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~+200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	0.584	$^\circ\text{C/W}$

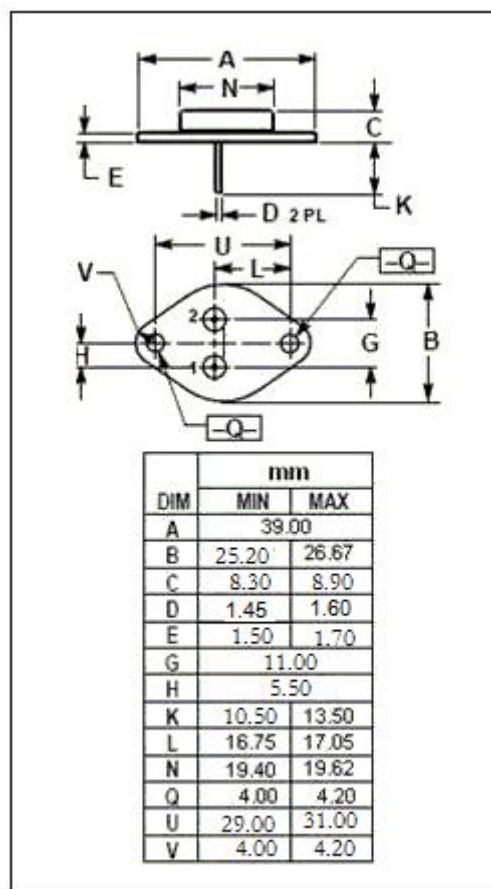

SPTECH Silicon PNP Darlington Power Transistor

MJ11033

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -50\text{mA}; I_B = 0$	-120			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = -25\text{A}; I_B = -250\text{mA}$			-2.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = -50\text{A}; I_B = 500\text{mA}$			-3.5	V
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage	$I_C = -25\text{A}; I_B = -250\text{mA}$			-3.0	V
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage	$I_C = -50\text{A}; I_B = -500\text{mA}$			-4.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -120\text{V}; I_E = 0$ $V_{CB} = -120\text{V}; I_E = 0; T_C = 150^{\circ}\text{C}$			-2.0 -5.0	mA
I_{CEO}	Collector Cutoff Current	$V_{CE} = -120\text{V}; I_B = 0$			-2.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -5\text{V}; I_C = 0$			-5.0	mA
h_{FE-1}	DC Current Gain	$I_C = -25\text{A}, V_{CE} = -5\text{V}$	1000		18000	
h_{FE-2}	DC Current Gain	$I_C = -50\text{A}, V_{CE} = -5\text{V}$	400			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT](#) category:

Click to view products by [SPTECH](#) manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)