
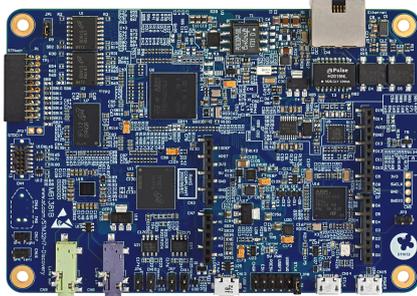


Discovery kits with STM32H745XI and STM32H750XB MCUs

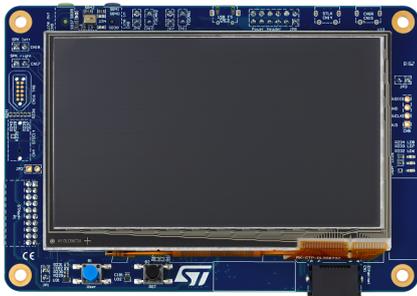

Board top and bottom views. Pictures are not contractual. PCB colors may differ.

Product status link

[STM32H745I-DISCO](#)
[STM32H750B-DK](#)

Features

- Arm® Cortex® core-based microcontroller with 2 Mbytes (STM32H745XIH6) or 128 Kbytes (STM32H750XBH6) of Flash memory and 1 Mbyte of RAM, in TFBGA240+25 package
- 4.3" RGB interface LCD with touch panel connector
- Ethernet compliant with IEEE-802.3-2002, and POE
- USB OTG FS with Micro-AB connector
- SAI audio codec
- One ST-MEMS digital microphone
- 2 x 512-Mbit Quad-SPI NOR Flash memory
- 128-Mbit SDRAM
- 4-Gbyte on-board eMMC
- 1 user and reset push-button
- Fanout daughterboard
- 2 x FDCANs
- Board connectors:
 - USB FS Micro-AB connectors
 - ST-LINK Micro-B USB connector
 - USB power Micro-B connector
 - Ethernet RJ45
 - Stereo headset jack including analog microphone input
 - Audio header for external speakers
 - TAG-Connect 10-pin footprint
 - Arm® Cortex® 10-pin 1.27 mm pitch debug connector over STDC14 footprint
 - Arduino™ Uno V3 expansion connectors
 - STMod+
- Flexible power-supply options:
 - STLINK-V3 USB connector, USB FS connector
 - 5 V delivered by RJ45 (Power Over Ethernet)
 - 5 V delivered by Arduino™ or external connector
 - USB charger
 - USB power
- On-board STLINK-V3E debugger/programmer with USB re-enumeration capability: mass storage, Virtual COM port, and debug port
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs

1 Description

The [STM32H745I-DISCO](#) and [STM32H750B-DK](#) Discovery kits are complete demonstration and development platforms for STMicroelectronics Arm® Cortex®-M7 and -M4 dual-core-based [STM32H745XI](#) (STM32H745XIH6 order code) and [STM32H750XB](#) (STM32H750XBH6 order code) microcontrollers, respectively.

The [STM32H745I-DISCO](#) and [STM32H750B-DK](#) Discovery kits are used as reference designs for user application development before porting to the final product, thus simplifying the application development.

The full range of hardware features available on the board helps users enhance their application development by an evaluation of almost all peripherals (such as USB OTG_FS, Ethernet 10/100Mb, eMMC, USART, SAI Audio DAC stereo with audio jack input and output, MEMS digital microphone, SDRAM, Quad-SPI Flash memory, and RGB interface LCD with capacitive multi-touch panel). Arduino™ Uno V3 connectors provide easy connection to extension shields or daughterboards for specific applications.

STLINK-V3E is integrated into the board, as an embedded in-circuit debugger and programmer for the STM32 MCU and the USB Virtual COM port bridge.

The [STM32H745I-DISCO](#) and [STM32H750B-DK](#) boards come with the STM32CubeH7 MCU package, which provides an STM32 comprehensive software HAL library as well as various software examples.

Note: *Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.*



2 Ordering information

To order the [STM32H745I-DISCO](#) and [STM32H750B-DK](#) Discovery kits, refer to [Table 1](#). For a detailed description of each board, refer to its user manual on the product web page. Additional information is available from the datasheet and reference manual of the target STM32.

Table 1. List of available products

Order code	Board reference	User manual	Target STM32
STM32H745I-DISCO	MB1381	UM2488	STM32H745XIH6U
STM32H750B-DK			STM32H750XBH6U

2.1 Product marking

Evaluation tools marked as “ES” or “E” are not yet qualified and therefore not ready to be used as reference design or in production. Any consequences deriving from such usage will not be at ST charge. In no event, ST will be liable for any customer usage of these engineering sample tools as reference design or in production.

“E” or “ES” marking examples of location:

- On the targeted STM32 that is soldered on the board (for illustration of STM32 marking, refer to the STM32 datasheet “Package information” paragraph at the www.st.com website).
- Next to the evaluation tool ordering part number that is stuck or silk-screen printed on the board.

Some boards feature a specific STM32 device version, which allows the operation of any bundled commercial stack/library available. This STM32 device shows a “U” marking option at the end of the standard part number and is not available for sales.

In order to use the same commercial stack in his application, a developer may need to purchase a part number specific to this stack/library. The price of those part numbers includes the stack/library royalties.

2.2 Codification

The meaning of the codification is explained in [Table 2](#).

Table 2. Codification explanation

STM32H7XXY-DISCO STM32H7XXY-DK	Description	Example: STM32H745I-DISCO
STM32H7	MCU series in STM32 Arm Cortex MCUs	STM32H7 Series
XX	MCU product line in the series	STM32H745
Y	STM32 Flash memory size: <ul style="list-style-type: none"> • B for 128 Kbytes • I for 2 Mbytes 	2 Mbytes
DISCO / DK	Discovery kit	Discovery kit

The order code is mentioned on a sticker placed on the top side of the board.

3 Development environment

3.1 System requirements

- Windows® OS (7, 8 and 10), Linux® 64-bit, or macOS®
- USB Type-A to Micro-B cable

Note: macOS® is a trademark of Apple Inc. registered in the U.S. and other countries.

3.2 Development toolchains

- Keil® MDK-ARM (see [note](#))
- IAR™ EWARM (see [note](#))
- GCC-based IDEs

Note: On Windows® only.

3.3 Demonstration software

The demonstration software, included in the STM32Cube MCU Package corresponding to the on-board microcontroller, is preloaded in the STM32 Flash memory for easy demonstration of the device peripherals in standalone mode. The latest versions of the demonstration source code and associated documentation can be downloaded from www.st.com.

Revision history

Table 3. Document revision history

Date	Version	Changes
9-Janv-2019	1	Initial release.
1-Apr-2019	2	Updated pictures on the cover page and reorganized the entire document: <ul style="list-style-type: none">• Updated Features• Updated Ordering information• Added Product marking• Added Codification• Added Development environment

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM category](#):

Click to view products by [STMicroelectronics manufacturer](#):

Other Similar products are found below :

[SAFETI-HSK-RM48](#) [PICOHOBBITFL](#) [CC-ACC-MMK-2443](#) [TWR-MC-FRDMKE02Z](#) [EVALSPEAR320CPU](#) [EVB-SCMIMX6SX](#)
[MAX32600-KIT#](#) [TMDX570LS04HDK](#) [TXSD-SV70](#) [OM13080UL](#) [EVAL-ADUC7120QSPZ](#) [OM13082UL](#) [TXSD-SV71](#)
[YGRPEACHNORMAL](#) [OM13076UL](#) [PICODWARFFL](#) [YR8A77450HA02BG](#) [3580](#) [32F3348DISCOVERY](#) [ATTINY1607](#) [CURIOSITY](#)
[NANO](#) [PIC16F15376](#) [CURIOSITY NANO BOARD](#) [PIC18F47Q10](#) [CURIOSITY NANO](#) [VISIONSTK-6ULL V.2.0](#) [80-001428](#) [DEV-17717](#)
[EAK00360](#) [YR0K77210B000BE](#) [RTK7EKA2L1S00001BE](#) [MAX32651-EVKIT#](#) [SLN-VIZN-IOT](#) [LV18F V6 DEVELOPMENT SYSTEM](#)
[READY FOR AVR BOARD](#) [READY FOR PIC BOARD](#) [READY FOR PIC \(DIP28\)](#) [EVB-VF522R3](#) [AVRPLC16 V6 PLC SYSTEM](#)
[MIKROLAB FOR AVR XL](#) [MIKROLAB FOR PIC L](#) [MINI-AT BOARD - 5V](#) [MINI-M4 FOR STELLARIS](#) [MOD-09.Z](#) [BUGGY +](#)
[CLICKER 2 FOR PIC32MX + BLUETOOT](#) [1410](#) [LETS MAKE PROJECT PROGRAM. RELAY PIC](#) [LETS MAKE - VOICE](#)
[CONTROLLED LIGHTS](#) [LPC-H2294](#) [DSPIC-READY2 BOARD](#) [DSPIC-READY3 BOARD](#) [MIKROBOARD FOR ARM 64-PIN](#)
[MIKROLAB FOR AVR](#)